



Akira

Collection



1	Akira Ceiling Light	Page 131	28W - 90W	See <a href="https://unios.com/akirasrm">unios.com/akirasrm</a> for more details
2	Akira Suspended Ceiling Light	Page 135	28W - 90W	See <a href="https://unios.com/akirasuspended">unios.com/akirasuspended</a> for more details
3	Akira Track Light	Page 201	15W - 20W	See <a href="https://unios.com/akiratrack">unios.com/akiratrack</a> for more details






## Akira

## Ceiling Light



		LED Power	Lumens (at 3000K)	Beam	Weight	IP Rating	Class Rating
1	R350 Surface Mounted	28W (750mA)	2755lm	110°	1.8kg	IP54	Class II
2	R600 Surface Mounted	60W (2x 750mA)	4100lm	110°	7.7kg	IP20	Class I
3	R900 Surface Mounted	90W (3x 750mA)	7512lm	110°	15.4kg	IP20	Class I


Key Information		Design		Performance		Driver	
Mounting	Ceiling Surface	Product Family	Akira	Lumen efficacy	Up to 112lm/W	Phase Cut	Built in
Finish	<input type="checkbox"/> Textured Black <input type="checkbox"/> Textured White	Material	Powder Coated Aluminium, Polycarbonate Diffuser	CRI (Ra/R9)	80+ (R9: >0)	DALI	Remote
LED CCT	<input type="checkbox"/> 3000K <input type="checkbox"/> 4000K			UGR	<19	Bluetooth	Remote
Warranty	5 Year			Lifetime (Ta 25°C)	>54,000h L90B10		
				Ambient Temperature Range	10°- 30°C		
				SDCM	≤3		

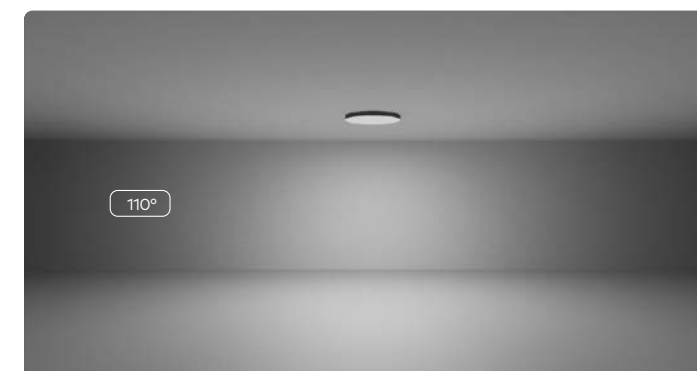



Akira

Ceiling Light

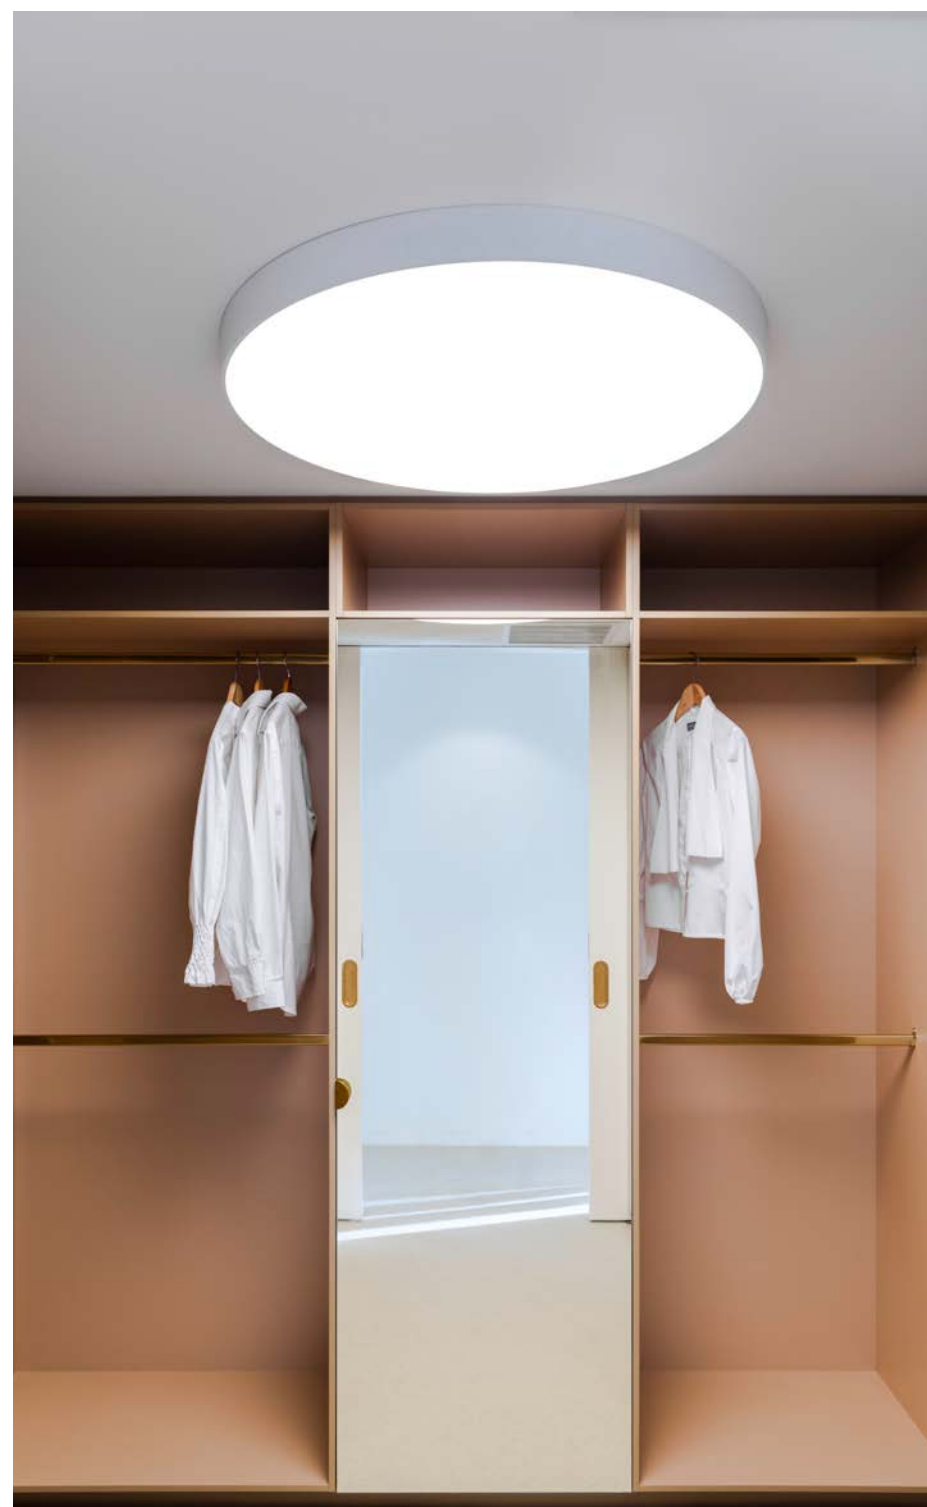

**Akira**  
Surface Mounted Ceiling Light  
R600  
Textured White  
Karrinyup Shopping Precinct,  
Owston Hill






## Akira Suspended

## Ceiling Light



	LED Power	Lumens (at 3000K)	Beam	Weight	Min. Suspension Height
1 R350 Suspended	28W (750mA)	2755lm	110°	2.1kg	250mm
2 R600 Suspended	60W (2x 750mA)	4100lm	110°	8.0kg	400mm
3 R900 Suspended	90W (3x 750mA)	7512lm	110°	15.7kg	600mm

Key Information		Design		Performance		Driver	
Mounting	Ceiling Suspended	Product Family	Akira	Lumen efficacy	Up to 112lm/W	Phase Cut	Built in
Finish	<input type="checkbox"/> Textured Black <input type="checkbox"/> Textured White	Material	Powder Coated Aluminium, Polycarbonate Diffuser	CRI (Ra/R9)	80+ (R9: >0)	DALI	Remote
LED CCT	<input type="checkbox"/> 3000K <input type="checkbox"/> 4000K	IP Rating	IP20	UGR	<19		
Warranty	5 Year	Class Rating	Class I	Lifetime (Ta 25°C)	>54,000h L90B10		
				Ambient Temperature Range	10°- 30°C		
				SDCM	≤3		

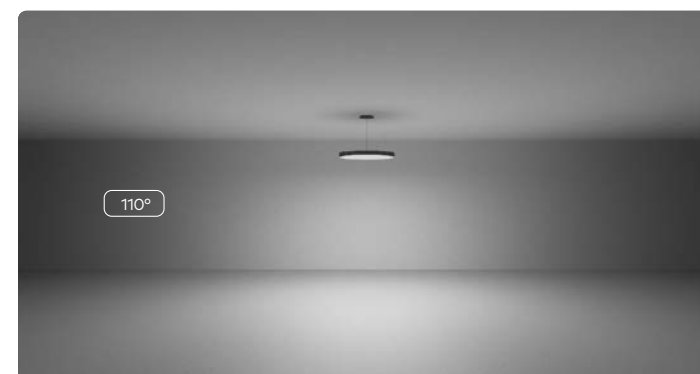






**Akira Suspended**  
 Ceiling Light  
 R600  
 Textured White  
 Hutchins Middle School,  
 Cremorne Office

Akira Suspended

Ceiling Light





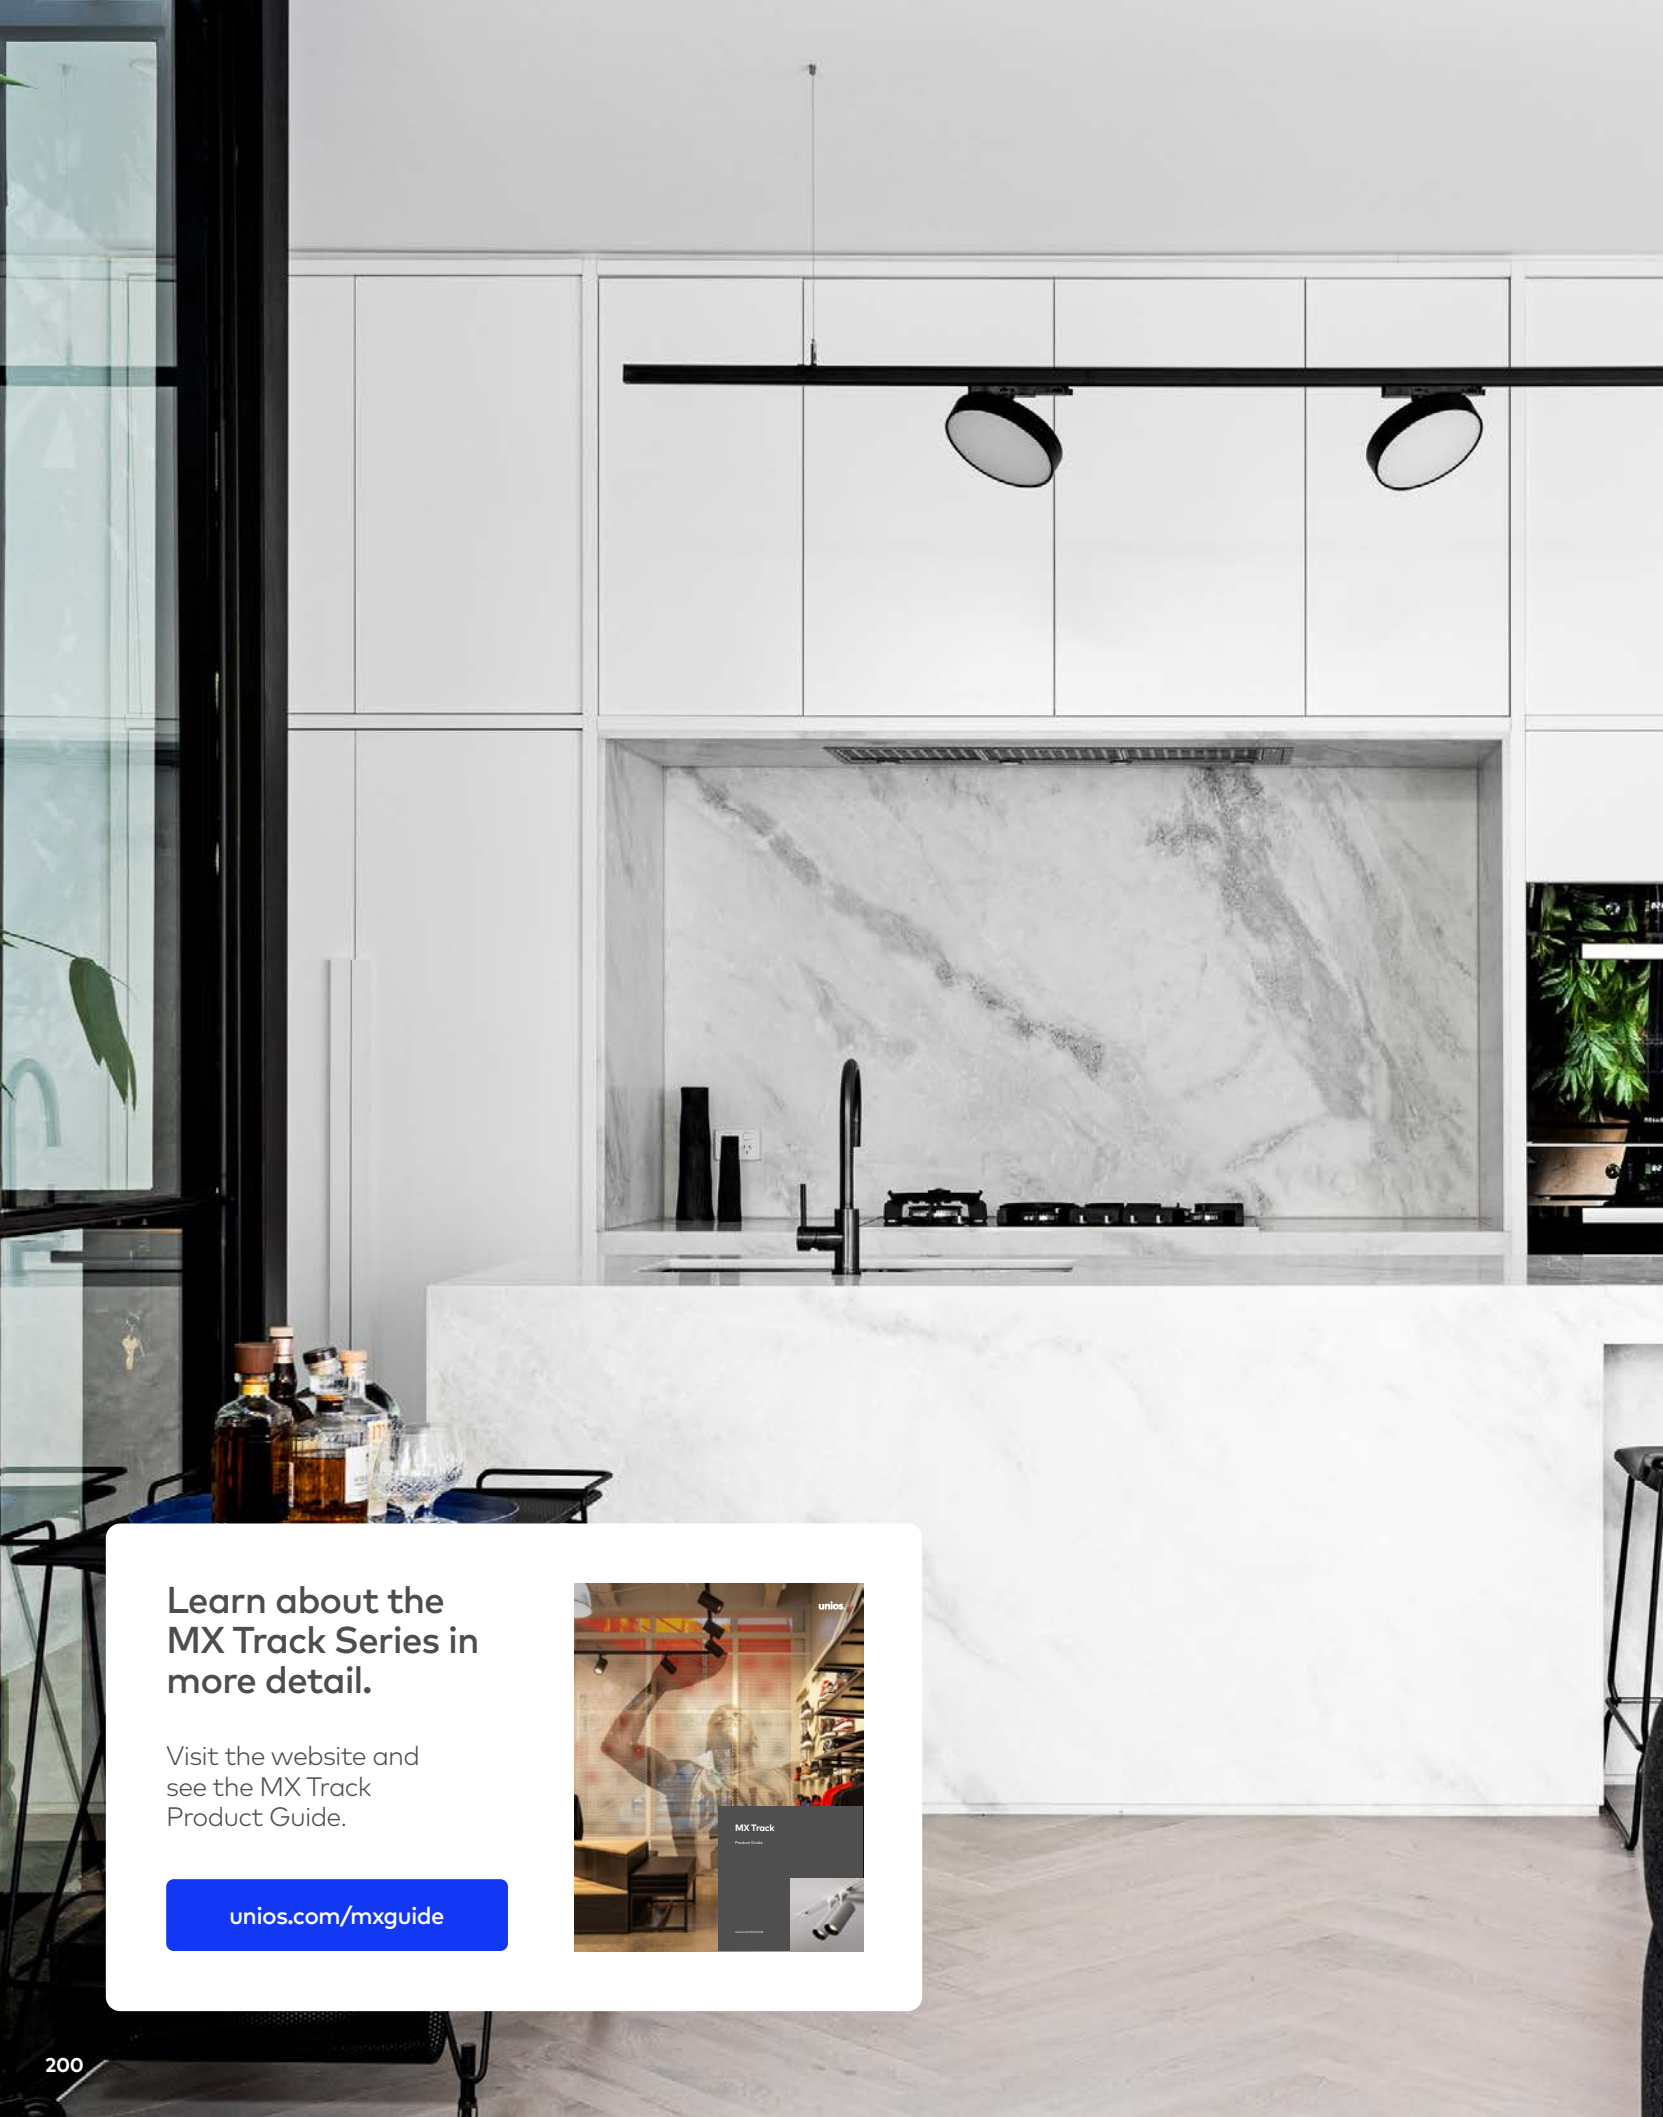

# Akira

# Track Light



	LED Power	Lumens (at 3000K)	Beam	Weight
1 R150 Track	15W (400mA)	1017lm	110°	800g
2 R220 Track	20W (500mA)	1536lm	110°	1.1kg

Key Information		Design		Performance		Track & Driver Compatibility	
Mounting	Track	Product Family	Akira	Lumen efficacy	Up to 77lm/W	Phase Cut	MX3 In-Track
Finish	<input type="checkbox"/> Textured Black <input type="checkbox"/> Textured White	Adjustability	350° Rotation, 80° Tilt	CRI (Ra/R9)	90+ (R9: >50)	DALI	MX5 In-Track
LED CCT	<input type="checkbox"/> 3000K <input type="checkbox"/> 4000K	Material	Powder Coated Aluminium, Polycarbonate Diffuser	UGR	<19	Bluetooth	MX5 In-Track
Warranty	5 Year	IP Rating	IP20	Lifetime (Ta 25°C)	>50,000h L70B10		
		Class Rating	Class II	Ambient Temperature Range	10°- 30°C		
				SDCM	≤3		
				COI Compliance model requirements	4000K		

Learn about the MX Track Series in more detail.

Visit the website and see the MX Track Product Guide.

[unios.com/mxguide](https://unios.com/mxguide)

