

1	Apex Downlight	Page 87	8W - 25W	See <a href="https://unios.com/apexdownlight">unios.com/apexdownlight</a> for more details
2	Apex Surface Mounted Downlight	Page 91	8W - 25W	See <a href="https://unios.com/apexsm">unios.com/apexsm</a> for more details
3	Apex Adjustable Downlight	Page 95	8W - 15W	See <a href="https://unios.com/apexadjustable">unios.com/apexadjustable</a> for more details




## Apex

## Downlight



	LED Power	Lumens (at 3000K)	Beam	Weight	Dusk Dimming
1 Small (80mm)	8W (200mA)	710lm	15°   40°   60°   92°	244g	-
2 Medium (105mm)	10W (250mA)	888lm	15°   40°   60°   92°	408g	-
	13W (300mA)	1052lm			Yes
	15W (350mA)	1227lm			Yes
3 Large (145mm)	25W (700mA)	2431lm	15°   40°   60°   75°	690g	-

Key Information		Design		Performance		Driver	
Mounting	Ceiling Recessed	Product Family	Apex	Lumen efficacy	Up to 94lm/W	Phase Cut	Remote
Finish	<input type="checkbox"/> Textured Black <input type="checkbox"/> Textured White	Material	Powder Coated Aluminium	CRI (Ra/R9)	92+ (R9: >50)	DALI	Remote
	LED CCT	IP Rating	IP65 (Room Side)	UGR	<19, <25 (Frosted Lens)	Bluetooth	Remote
	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 3000K-1800K (Dusk Dimming)	IK Rating	IK08, IK10	Lifetime (Ta 25°C)	>55,000h L90B10		
Warranty	5 Year	Class Rating	Class II	Ambient Temperature Range	10°- 30°C		
		Insulation Rating	IC	SDCM	≤2		
				COI Compliance model requirements	4000K		

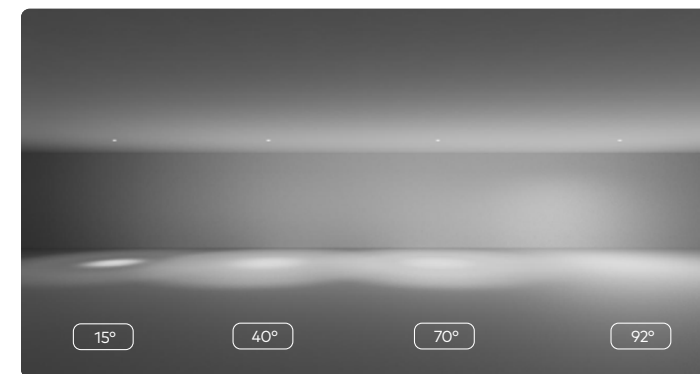


- Available Accessories**
- Surface Mount Canister
  - Linear Lens (for elliptical beam)
  - Frosted Lens (for 75° and 92° beam)
  - IK10 Clear Lens (for IK10 rating)





Apex

Downlight

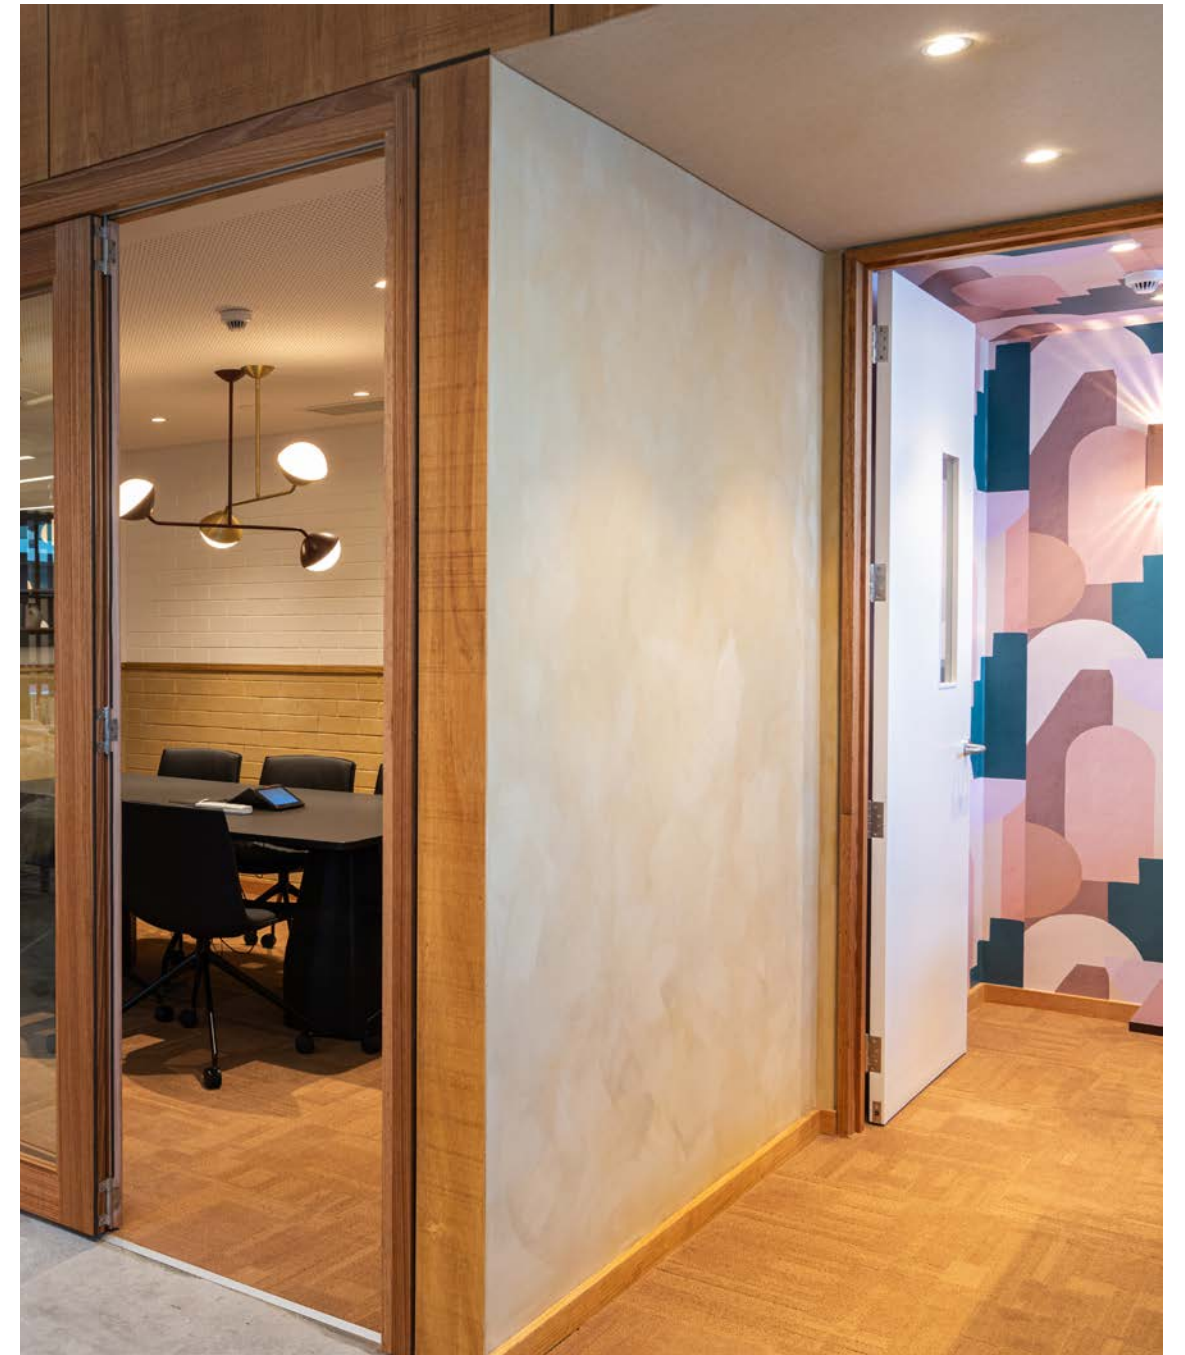


**Apex**  
Downlight  
Medium (105mm)  
Textured White  
Infinity Views, Vitality House




# Apex

# Surface Mounted Downlight

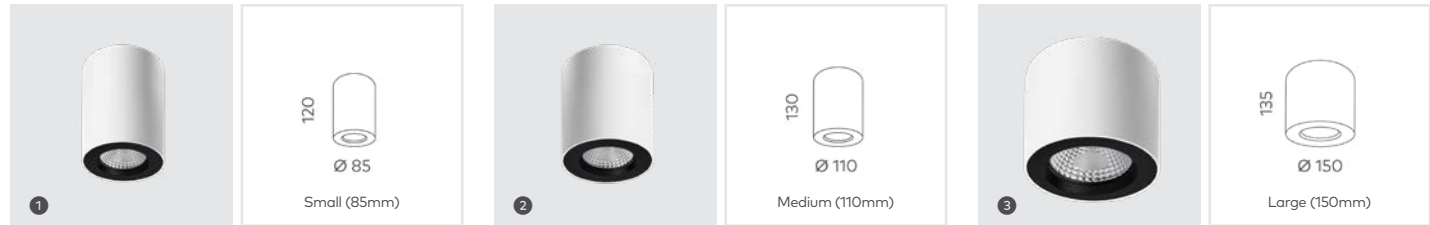


	LED Power	Lumens (at 3000K)	Beam	Weight	Dusk Dimming
1 Small (85mm)	8W (200mA) 10W (250mA)	710lm 888lm	15°   40°   60°   92°	844g	-
2 Medium (110mm)	10W (250mA) 13W (300mA) 15W (350mA)	876lm 1052lm 1227lm	15°   40°   60°   92°	1.2kg	Yes
3 Large (150mm)	25W (700mA)	2431lm	15°   40°   60°   75°	1.9kg	-

Key Information		Design		Performance		Driver	
Mounting	Ceiling Surface	Product Family	Apex	Lumen efficacy	Up to 94lm/W	Phase Cut	Built-in
Finish	<input type="checkbox"/> Textured Black <input type="checkbox"/> Textured White <input type="checkbox"/> Textured Black/White <input type="checkbox"/> Textured White/Black	Material	Powder Coated Aluminium	CRI (Ra/R9)	92+ (R9: >50)	DALI	Remote
	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 3000K-1800K (Dusk Dimming)	IP Rating	IP20	UGR	<19, <25 (Frosted Lens)	Bluetooth	Remote
LED CCT		IK Rating	IK08, IK10	Lifetime (Ta 25°C)	>55,000h L80B10		
Warranty	5 Year	Class Rating	Class I	Ambient Temperature Range	10°- 30°C		
				SDCM	≤2		
				COI Compliance model requirements	4000K		

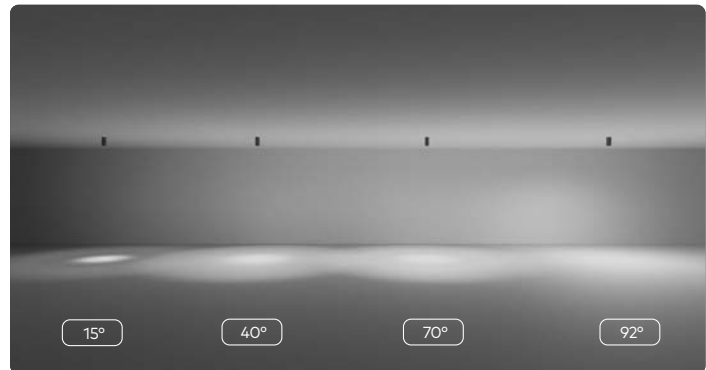

- Available Accessories**
- Linear Lens (for elliptical beam)
  - Frosted Lens (for 75° and 92° beam)
  - IK10 Clear Lens (for IK10 rating)






**Apex**  
Surface Mounted Downlight  
Small (85mm)  
Textured Black  
Skin Rejuvenate

**Apex**  
Surface Mounted Downlight  
Medium (110mm)  
Textured White  
Owston Hill

Apex

Surface Mounted Downlight

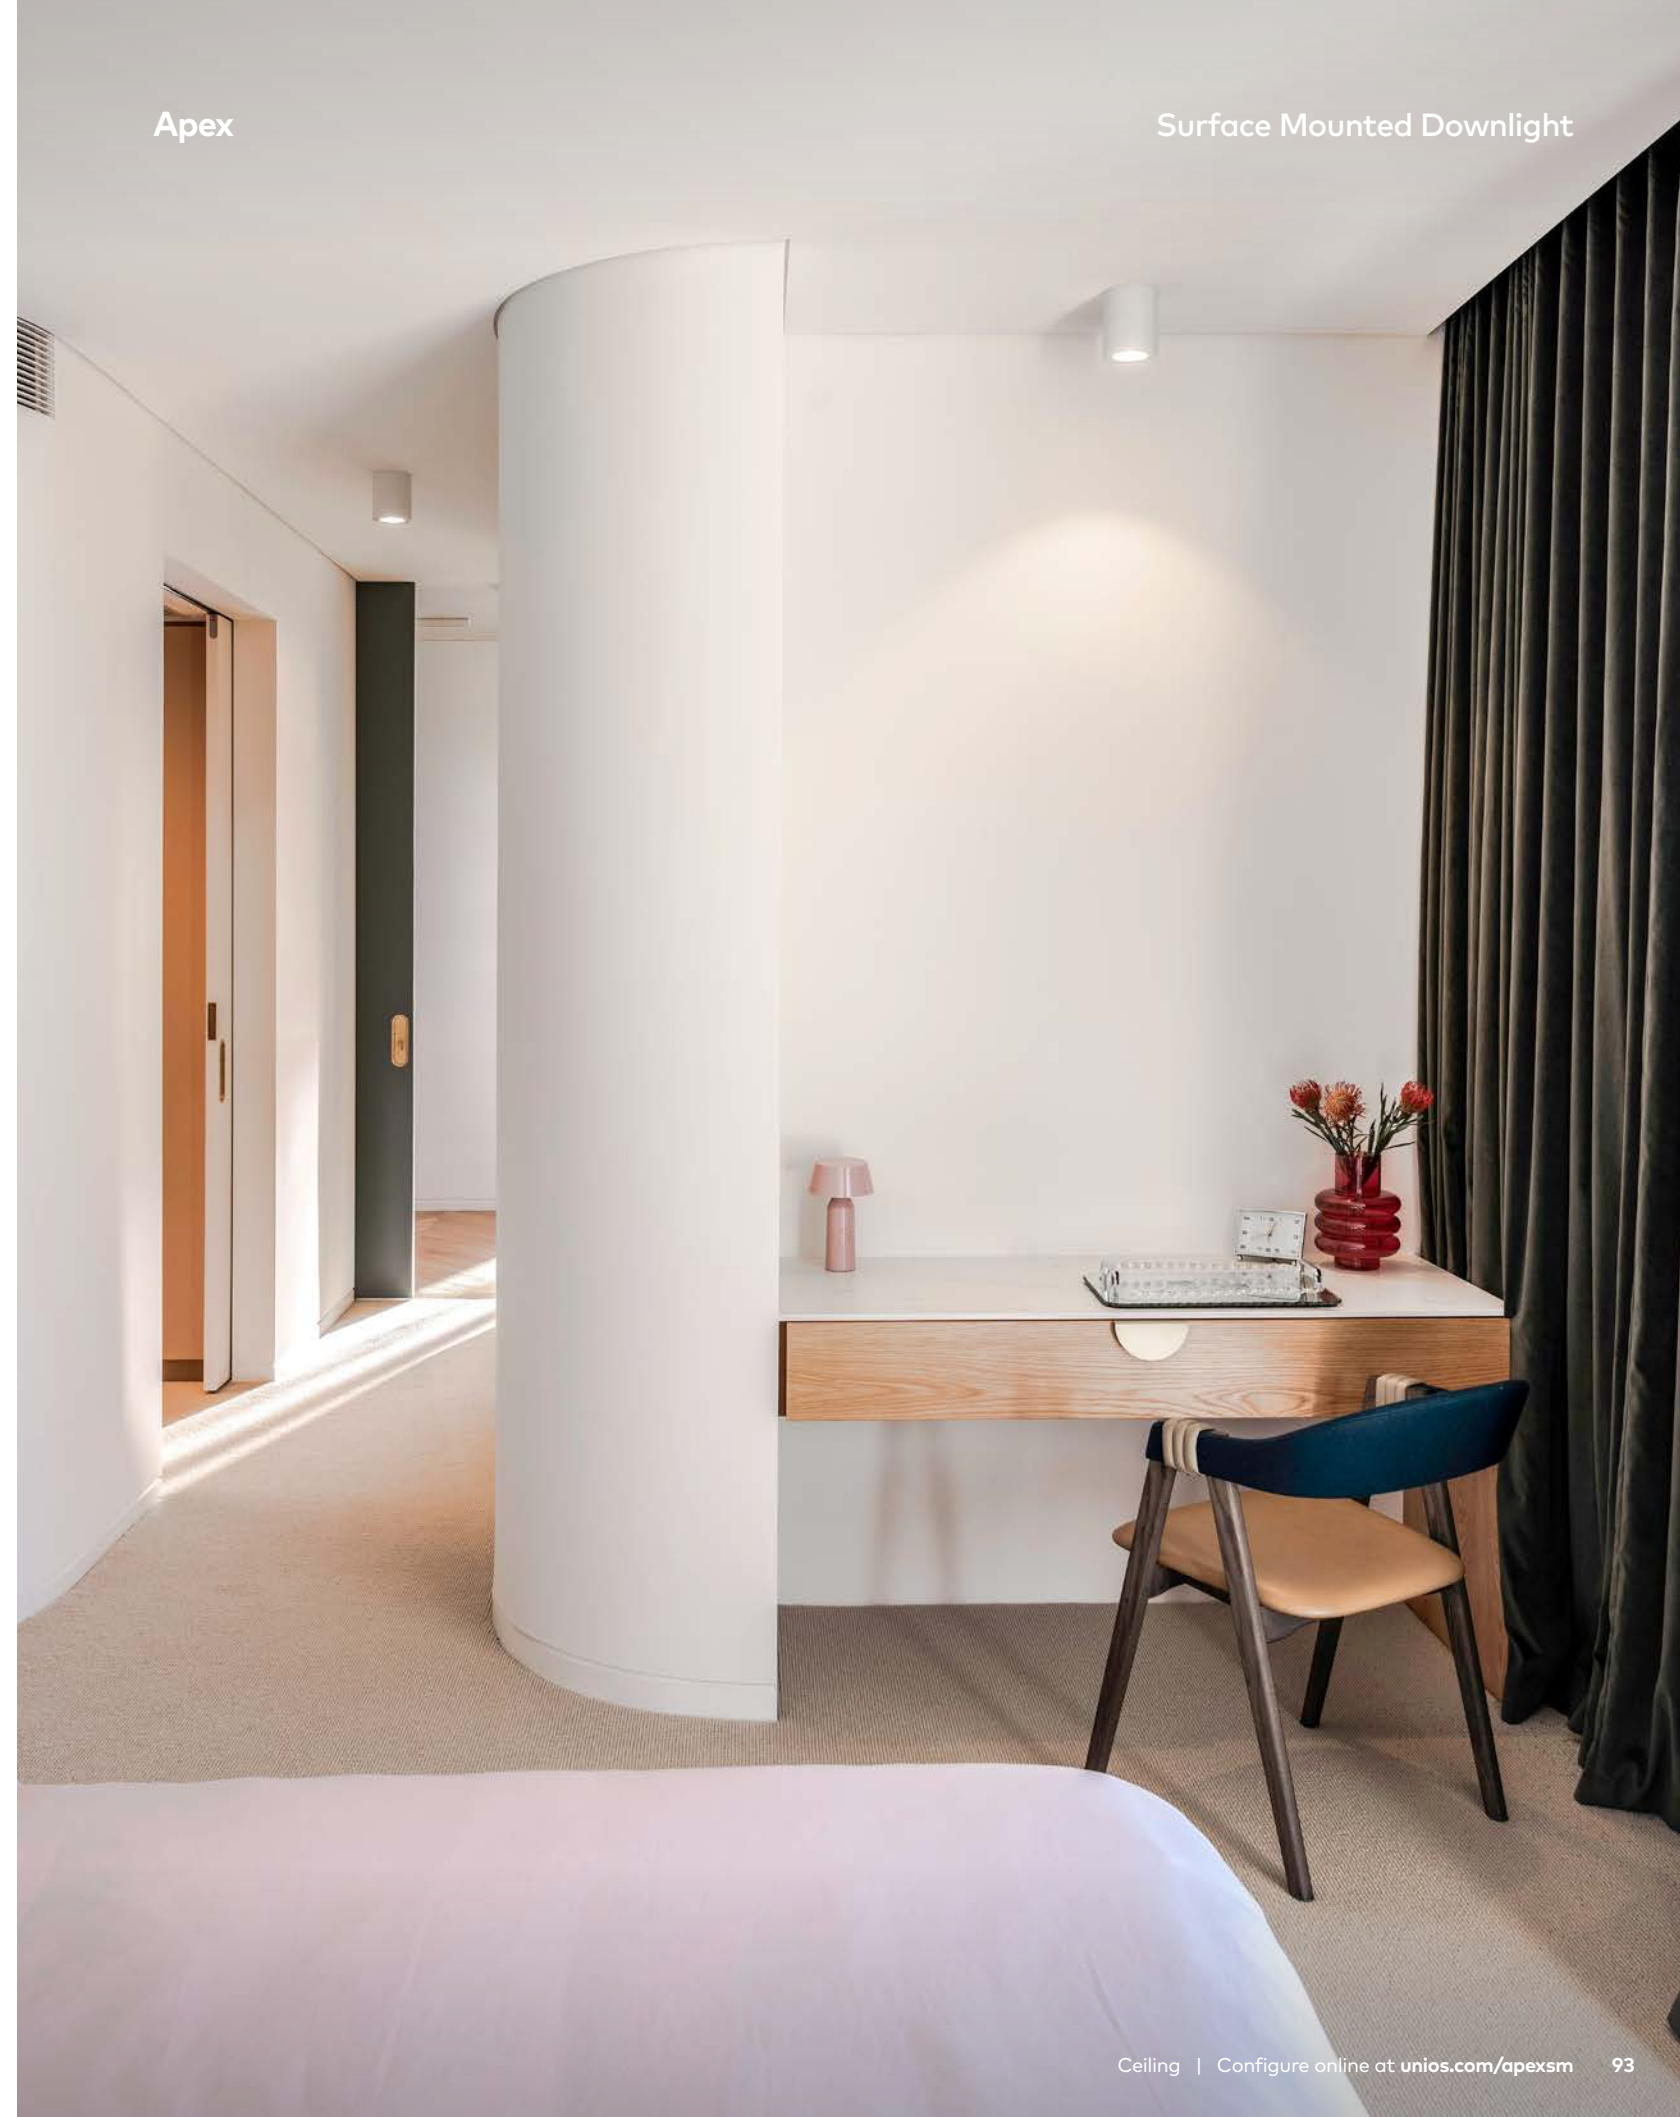




## Apex Adjustable

## Downlight



	LED Power	Lumens (at 3000K)	Beam	Weight
1 Apex Adjustable	8W (200mA)	654lm	15°   40°   60°   92°	354g
	10W (250mA)	817lm		
	13W (300mA)	981lm		
	15W (350mA)	1144lm		

Key Information		Design		Performance		Driver	
Mounting	Ceiling Recessed	Product Family	Apex	Lumen efficacy	Up to 76lm/W	Phase Cut	Remote
Finish	<input type="checkbox"/> Textured Black <input type="checkbox"/> Textured White	Adjustability	350° Rotation, 45° Tilt	CRI (Ra/R9)	92+ (R9: >50)	DALI	Remote
LED CCT	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K	Material	Powder Coated Aluminium	UGR	<19	Bluetooth	Remote
Warranty	5 Year	IP Rating	IP65 (Room Side)	Lifetime (Ta 25°C)	>55,000h L90B10		
		IK Rating	IK08, IK10	Ambient Temperature Range	10°- 30°C		
		Class Rating	Class II	SDCM	≤2		
		Insulation Rating	IC-4	COI Compliance model requirements	4000K		

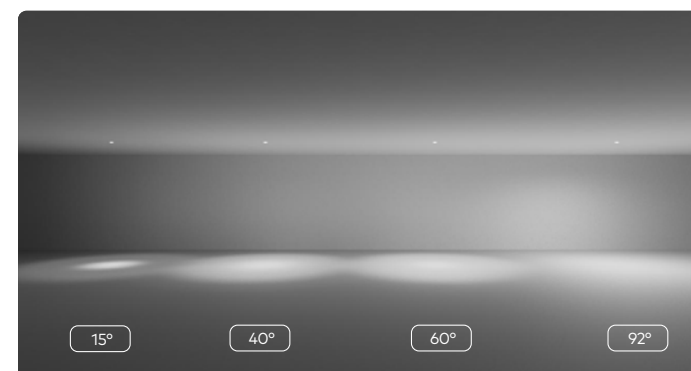

Available Accessories
Linear Lens (for elliptical beam)
Frosted Lens (for 92° beam)
IK10 Clear Lens (for IK10 rating)





Apex Adjustable

Downlight



Apex Adjustable  
Downlight  
Textured White  
Il Mio Cafe, Lien Huong Store