
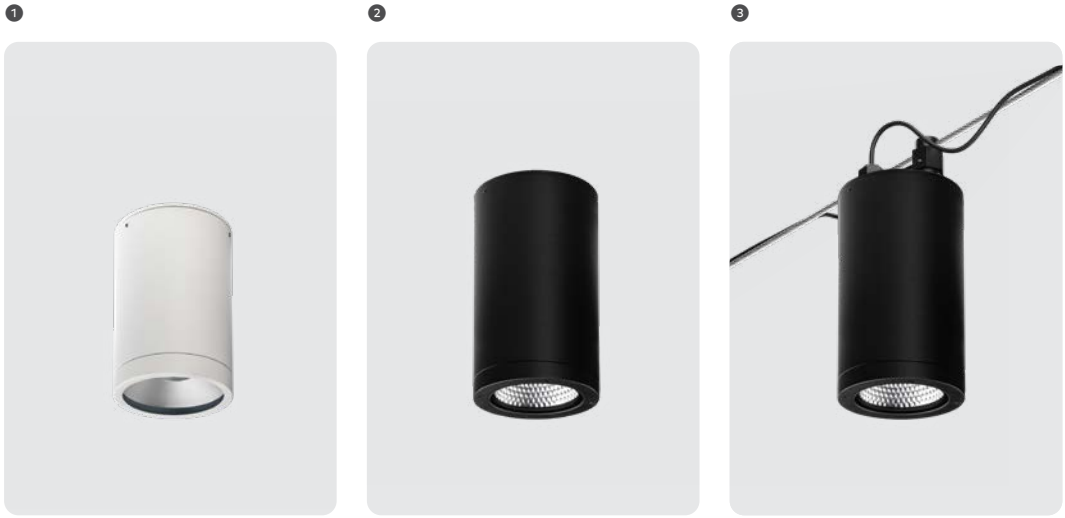


Learn about the  
Athena Series in  
more detail.

Visit the website for  
the Athena Series  
Product Guide.

[unios.com/athenaguide](https://unios.com/athenaguide)

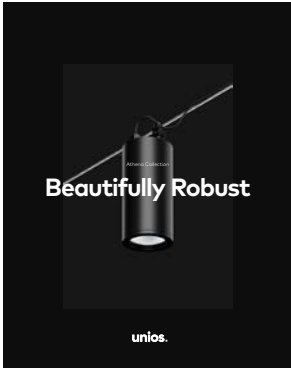

1	Athena G2 Series	Page 125	18W- 28W	See <a href="https://unios.com/athenag2">unios.com/athenag2</a> for more details
2	Athena Max Series	Page 126	38W	See <a href="https://unios.com/athenamax">unios.com/athenamax</a> for more details
3	Athena Max Catenary Light	Page 127	38W	See <a href="https://unios.com/athenacatenary">unios.com/athenacatenary</a> for more details





**Athena G2**  
Surface Mounted Downlight  
Textured Black  
Unios HQ

**Athena Max**  
Catenary Light  
Textured Black  
Karrinyup Shopping Precinct

Athena

Collection







Athena G2


Series



**Athena Max**  
Catenary Light  
Textured Black  
Karrinyup Shopping Precinct

**Athena Max**  
Wall Light  
Fixed One Wall  
Textured Black  
Unios HQ



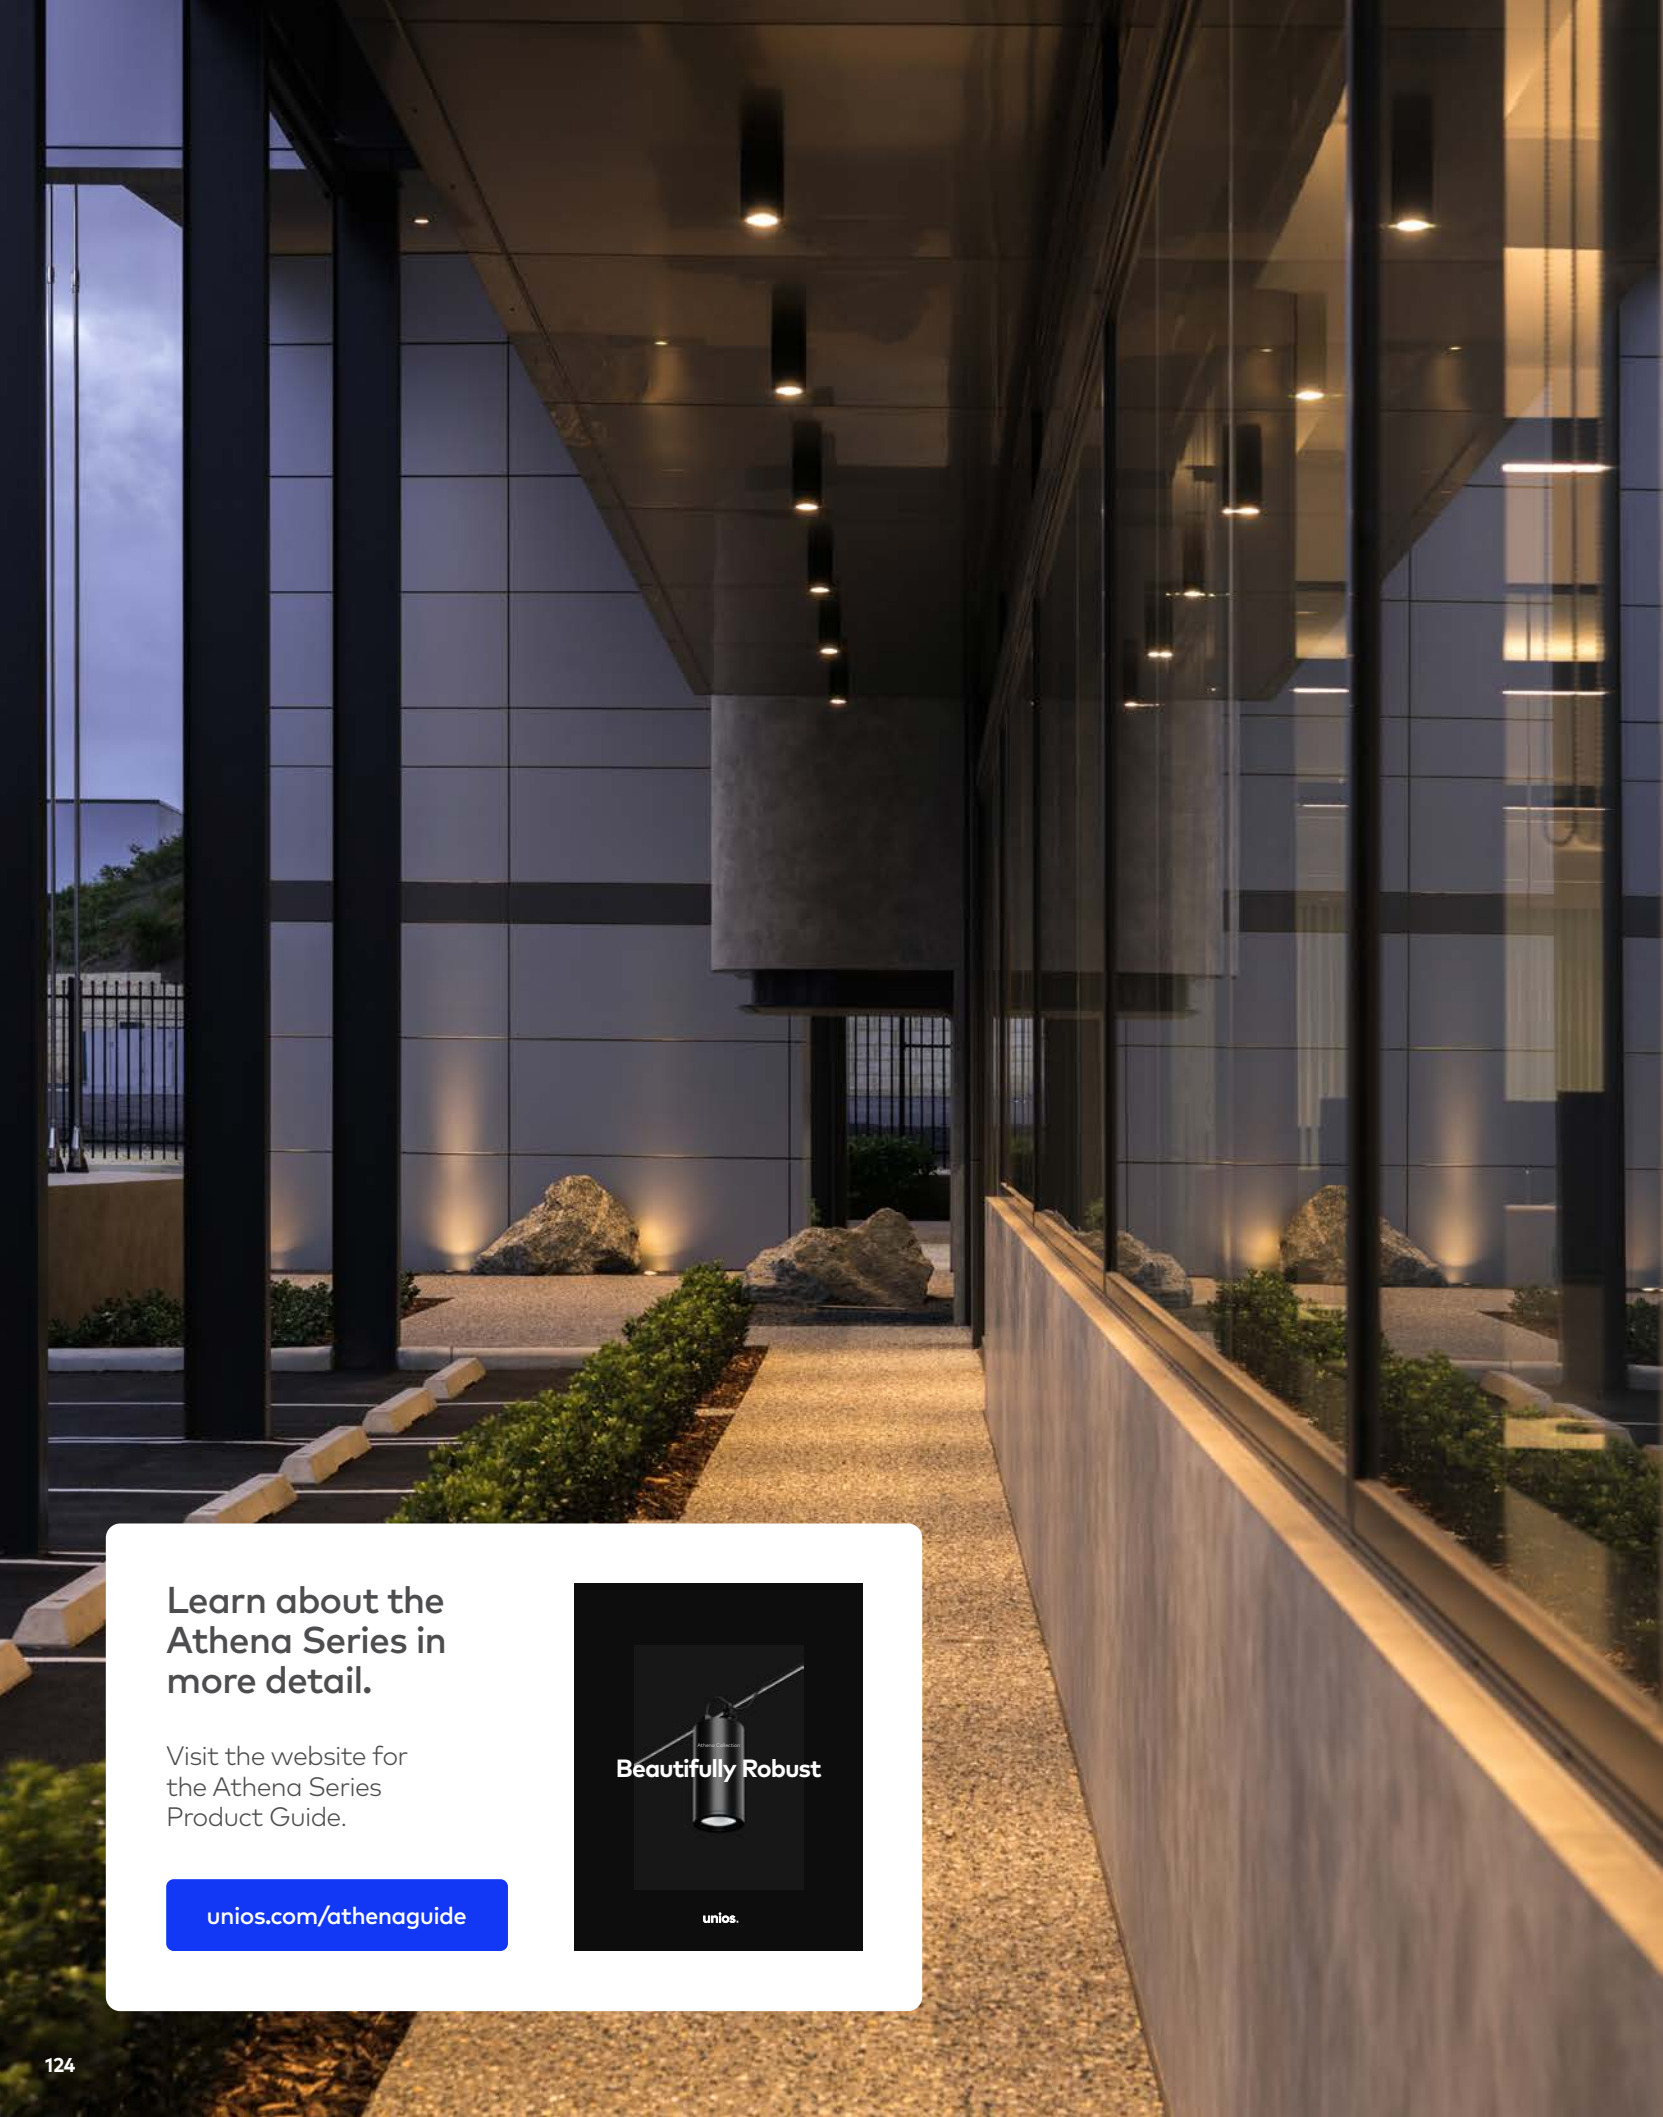

Athena G2

Series





		LED Power	Lumens (at 3000K)	Beam	Weight
1	Surface Mounted	18W (500mA)	2077lm	15°   36°   60°	1.4kg
2	Fixed One Wall	18W (500mA)	2077lm	15°   36°   60°	1.6kg
3	Fixed Two Wall	28W (800mA)	3309lm	15°   36°   60°	2.1kg

Key Information		Design		Performance		Driver	
Mounting	Ceiling Surface, Wall Surface	Product Family	Athena	Lumen efficacy	Up to 110lm/W	Phase Cut	Built in
Finish	■ Textured Black □ Textured White	Material	Powder Coated Aluminium	CRI (Ra/R9)	80+ (R9: >0)	DALI	Built in
LED CCT	■ 3000K ■ 4000K	IP Rating	IP66	UGR	<13	Bluetooth	Remote
Warranty	5 Year	Class Rating	Class I	Lifetime (Ta 25°C)	>55,000h L90B10		
				Ambient Temperature Range	10°- 30°C		
				SDCM	≤2		

Learn about the  
Athena Series in  
more detail.

Visit the website for  
the Athena Series  
Product Guide.

[unios.com/athenaguide](https://unios.com/athenaguide)

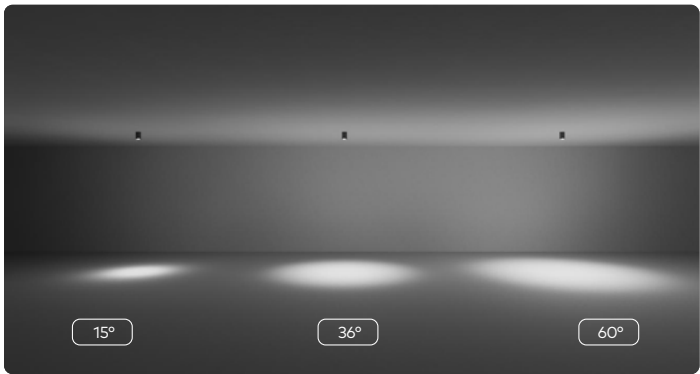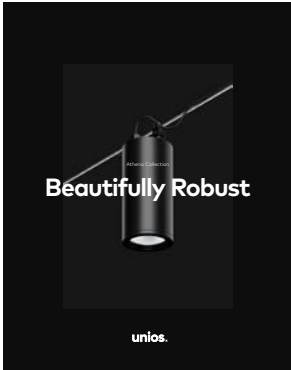

Available Accessories
Asymmetrical Baffle (for forward throw)
Linear Lens (for elliptical beams)
Honeycomb Lens (for reduced glare)



Athena Max

Series




		LED Power	Lumens (at 3000K)	Beam	Weight
1	Surface Mounted	38W (1000mA)	3774lm	15°   36°   60°	2.9kg
2	Fixed One Wall	38W (1000mA)	3774lm	15°   36°   60°	3.0kg
3	Fixed Two Wall	38W (1000mA)	4042lm	15°   36°   60°	3.7kg

Key Information		Design		Performance		Driver	
Mounting	Ceiling Surface, Wall Surface	Product Family	Athena	Lumen efficacy	Up to 113lm/W	Phase Cut	Built in
Finish	■ Textured Black □ Textured White	Material	Powder Coated Aluminium	CRI (Ra/R9)	80+ (R9: >0)	DALI	Built in
LED CCT	■ 3000K ■ 4000K	IP Rating	IP66	UGR	<16	Bluetooth	Remote
Warranty	5 Year	IK Rating	IK10	Lifetime (Ta 25°C)	>55,000h L90B10		
		Class Rating	Class I	Ambient Temperature Range	10°- 30°C		
				SDCM	≤2		


Athena Max

Catenary Light

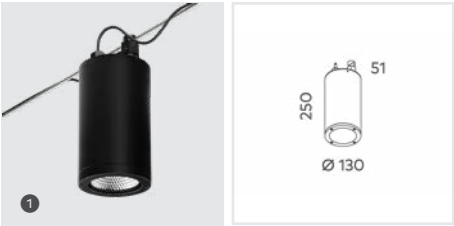


		LED Power	Lumens (at 3000K)	Beam	Weight
1	Athena Max Catenary	38W (1000mA)	3774lm	15°   36°   60°	3.2kg

Key Information		Design		Performance		Driver	
Mounting	Catenary Suspended	Product Family	Athena	Lumen efficacy	Up to 113lm/W	Phase Cut	Built in
Finish	■ Textured Black	Material	Powder Coated Aluminium	CRI (Ra/R9)	80+ (R9: >0)	DALI	Built in
LED CCT	■ 3000K ■ 4000K	IP Rating	IP66	UGR	<16	Bluetooth	Remote
Warranty	5 Year	IK Rating	IK10	Lifetime (Ta 25°C)	>55,000h L90B10		
		Class Rating	Class I	Ambient Temperature Range	10°- 30°C		
		Catenary Wire Diameter	6-12mm	SDCM	≤2		
		Max. Cable Diameter	13mm				

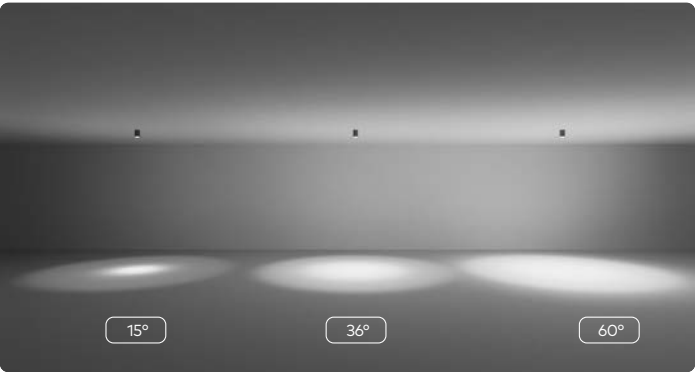

Available Accessories
Linear Lens (for elliptical beams)
Honeycomb Lens (for reduced glare)

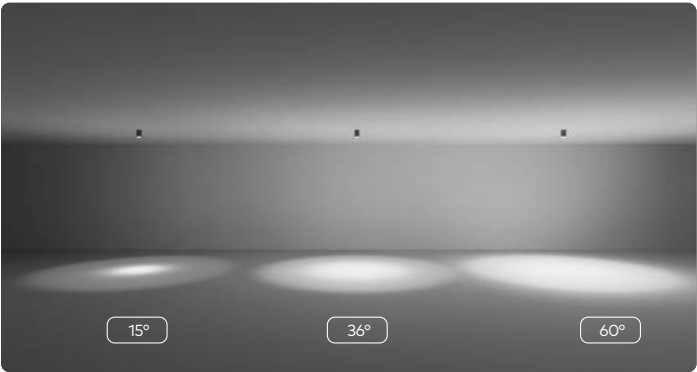

Available Accessories
Linear Lens (for elliptical beams)
Honeycomb Lens (for reduced glare)

