





Compass


Adjustable Inground Uplight




1




Small (86mm) | Luminaire




Small (86mm) | Canister




2




Medium (125mm) | Luminaire




Medium (125mm) | Canister



3




Large (175mm) | Luminaire



Large (175mm) | Canister

		LED Power	Lumens (at 3000K)	Beam	Weight	Lifetime (Ta 25°C)
1	Small (86mm)	6W (24V DC)	375lm	15° 24° 40°	670g	>60,000h L80B10
2	Medium (125mm)	11W (24V DC)	750lm	24° 36°	1.1kg	>60,000h L80B10
3	Large (175mm)	15W (24V DC)	1025lm	15° 24° 36°	3.8kg	>50,000h L70B10



Key Information		Design		Performance		Driver	
Mounting	Recessed	Adjustability	20° Tilt	Lumen efficacy	Up to 71lm/W	Non-Dim	Remote, wired in parallel
Finish	<div><div>■</div> Textured Black</div> <div><div>■</div> 316 Stainless Steel</div>	Material	316 Stainless Steel	CRI (Ra/R9)	80+ (R9: >0)		
CCT	<div><div>■</div> 3000K</div> <div><div>■</div> 4000K</div>	IP Rating	IP67	Ambient Temperature Range	10°- 30°C		
Warranty	3 Years	IK Rating	IK09	SDCM	≤3		
		Maximum Load	1000kg				
		Class Rating	Class III				

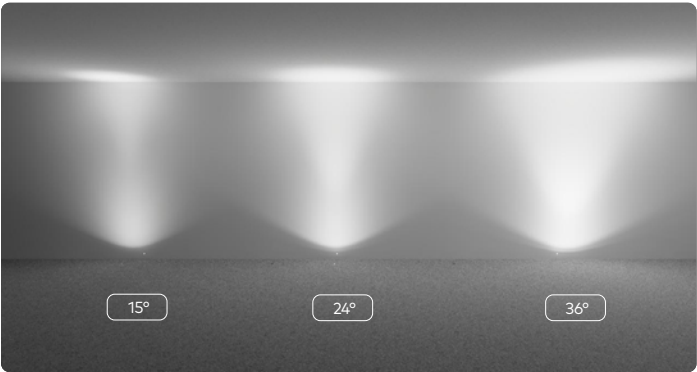



Compass

Adjustable Inground Uplight

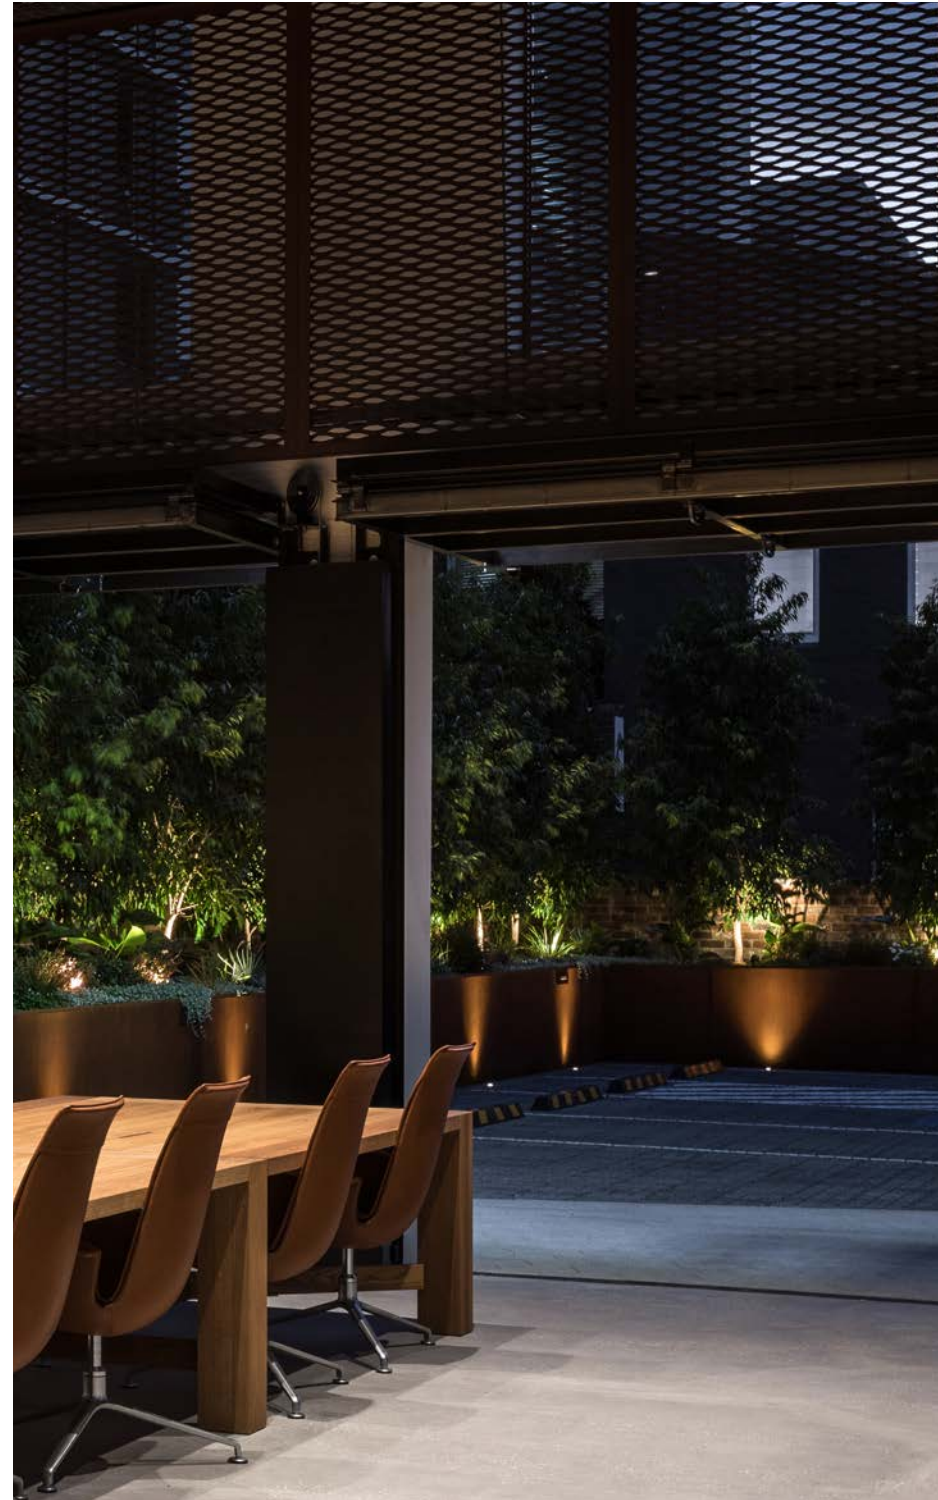

Compass
Adjustable Inground Uplight
Large (175mm)
316 Stainless Steel
Knox Children & Family Centre

Compass
Adjustable Inground Uplight
Small (86mm)
Textured Black
The Hayesbery