




Echo

Wall Light

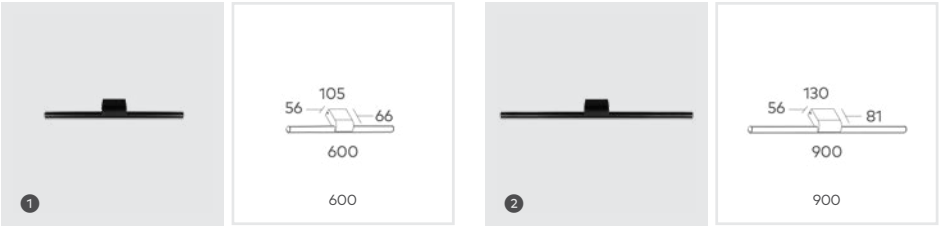

		LED Power	Lumens (at 3000K)	Beam	Weight	Required mounting clearance
1	Echo 600	12W (300mA)	660lm	110°	1.9kg	60mm from surface
2	Echo 900	20W (500mA)	1165lm	110°	2.9kg	75mm from surface

Key Information		Design		Performance		Driver	
Mounting	Wall Surface	Material	Powder Coated Aluminium, Frosted Acrylic Diffuser	Lumen efficacy	Up to 52lm/W	Non-Dim	Built-in
Finish	<input checked="" type="checkbox"/> Textured Black <input type="checkbox"/> Textured White	IP Rating	IP65	CRI (Ra/R9)	90+ (R9:>50)	DALI	Remote
LED CCT	<input checked="" type="checkbox"/> 3000K <input type="checkbox"/> 4000K	Class Rating	Class I	Lifetime (Ta 25°C)	>50,000h L70B10	Bluetooth	Remote
Warranty	3 Years			Ambient Temperature Range	10°- 30°C		
				SDCM	≤3		

