



	LED Power	Lumens (at 3000K)	Beam	Cable Entry
1 Glide Mini GS10 Surface Mounted	10W/m (24V DC)	488lm/m	110°	Rear, End

Key Information		Design		Performance		Driver	
Mounting	Surface	Product Family	Eclipse	Lumen efficacy	Up to 53lm/W	Non-Dim	Remote
Finish	<div><div></div> Textured Black</div> <div><div></div> Aluminium</div>	Material	Powdercoated Aluminum, PMMA Diffuser	CRI (Ra/R9)	90+ (R9: >50)	Phase Cut	Remote
Strip Compatibility	Eclipse EC6 (6mm)	IP Rating	IP20	Lifetime (Ta 25°C)	>54,000h L80B10	DALI	Remote
LED CCT	<div><div></div> 2700K</div> <div><div></div> 3000K</div> <div><div></div> 4000K</div>	Class Rating	Class III	Ambient Temperature Range	10°- 30°C	Bluetooth	Remote
Warranty	5 Year	Maximum Supply Length	3 metres	SDCM	≤3		
		Cut Lengths	20mm				
		Maximum Run Power	50W				
		Na. of LED's	300/m				




Available Accessories
GS10 2m and 3m Accessory Set (2x end caps (one with cable entry), 3x mounting clips and 3x mounting screws per metre)

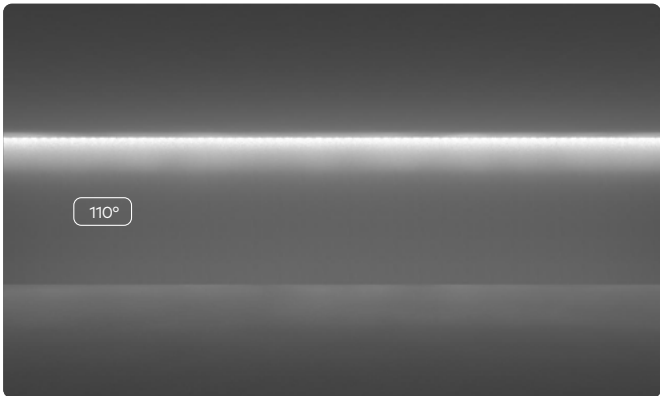

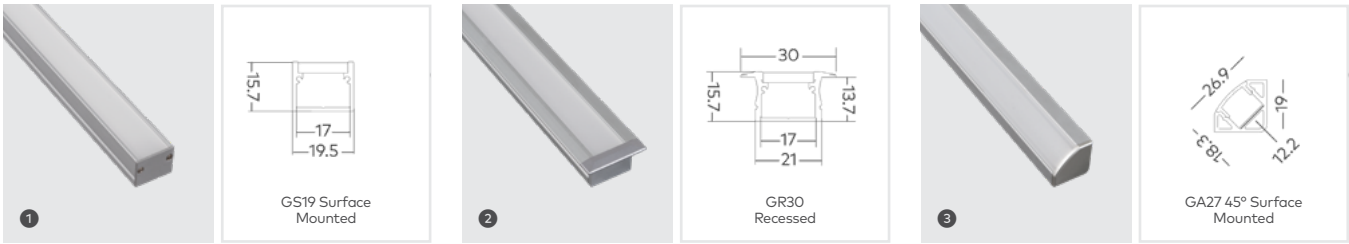

	LED Power	Lumens (at 3000K)	Beam	Cable Entry
1 Glide GS19 Surface Mounted	5W/m (24V DC)	245lm/m	110°	Rear, End, Side
	10W/m (24V DC)	480lm/m		
	15W/m (24V DC)	701lm/m		
	20W/m (24V DC)	930lm/m		
2 Glide GR30 Recessed	5W/m (24V DC)	251lm/m	110°	Rear, End, Side
	10W/m (24V DC)	487lm/m		
	15W/m (24V DC)	709m/m		
	20W/m (24V DC)	941lm/m		
3 Glide GA27 45° Surface Mounted	5W/m (24V DC)	341lm/m	110°	Rear, End
	10W/m (24V DC)	653lm/m		
	15W/m (24V DC)	974m/m		
	20W/m (24V DC)	1292lm/m		


Key Information		Design		Performance		Driver	
Mounting	Surface, Recessed	Product Family	Eclipse	Lumen efficacy	Up to 69lm/W	Non-Dim	Remote
Finish	<div><div>■</div> Textured Black</div> <div><div>■</div> Aluminium</div> <div><div>■</div> Textured White (GS19 & GS30)</div>	Material	Powdercoated Aluminium, PMMA Diffuser	CRI (Ra/R9)	90+ (R9: >50)	Phase Cut	Remote
Strip Compatibility	Eclipse EC10 (10mm)	IP Rating	IP20, IP67 (Strip)	Lifetime (Ta 25°C)	>54,000h L80B10	DALI	Remote
LED CCT	<div><div>■</div> 2700K</div> <div><div>■</div> 3000K</div> <div><div>■</div> 4000K</div> <div><div>■</div> RGB</div> <div><div>■</div> RGBW</div> <div><div>■</div> 2700K-6500K (Tunable White)</div>	Class Rating	Class III	Ambient Temperature Range	10°- 30°C	Bluetooth	Remote
Warranty	5 Year	Maximum Supply Length	3 metres	SDCM	≤3		
		Cut Lengths	25mm, 50mm (RGB/RGBW/ Tunable White)				
		Maximum Run Power	100W				
		No. of LED's	120/m, 240/m (Tunable White)				

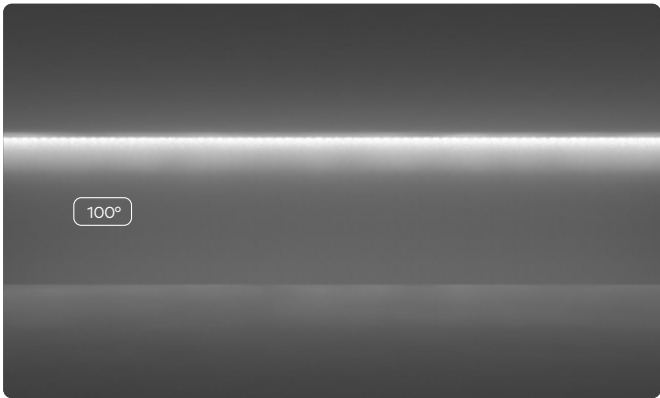

Available Accessories


- GS19 2m and 3m Accessory Set (2x end caps (one with cable entry), 3x mounting clips and 3x mounting screws per metre)
- GR30 2m and 3m Accessory Set (2x end caps (one with cable entry), 3x mounting clips and 3x mounting screws per metre)
- GA27 2m and 3m Accessory Set (2x end caps (one with cable entry), 3x mounting clips and 3x mounting screws per metre)



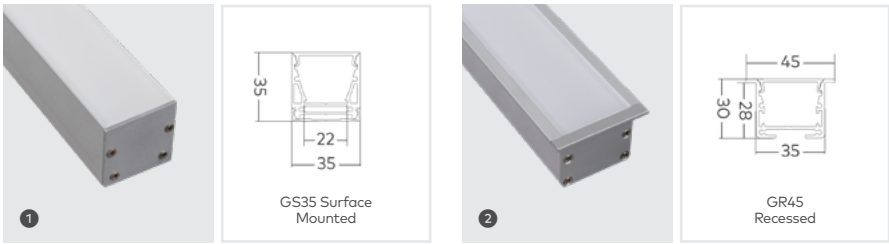

	LED Power	Lumens (at 3000K)	Beam	Cable Entry
1 Glide GS35 Surface Mounted	5W/m (24V DC)	254lm/m	110°	Rear, End, Side
	10W/m (24V DC)	507lm/m		
	15W/m (24V DC)	712lm/m		
	20W/m (24V DC)	977lm/m		
	2x 15W (24V DC)	1394lm/m		
2 Glide GR45 Recessed	5W/m (24V DC)	254lm/m	110°	Rear, End, Side
	10W/m (24V DC)	507lm/m		
	15W/m (24V DC)	712lm/m		
	20W/m (24V DC)	977lm/m		
	2x 15W (24V DC)	1394lm/m		

Key Information		Design		Performance		Driver	
Mounting	Surface, Recessed	Product Family	Eclipse	Lumen efficacy	Up to 69lm/W	Non-Dim	Remote
Finish	<div><div>■</div> Textured Black</div> <div><div>■</div> Aluminium</div> <div><div>■</div> Textured White (GS35 Only)</div>	Material	Powdercoated Aluminium, PC Diffuser	CRI (Ra/R9)	90+ (R9: >50)	Phase Cut	Remote
Strip Compatibility	Eclipse EC10 (10mm)	IP Rating	IP20, IP67 (Strip)	Lifetime (Ta 25°C)	>54,000h L80B10	DALI	Remote
LED CCT	<div><div>■</div> 2700K</div> <div><div>■</div> 3000K</div> <div><div>■</div> 4000K</div> <div><div>■</div> RGB</div> <div><div>■</div> RGBW</div> <div><div>■</div> 2700K-6500K (Tunable White)</div>	Class Rating	Class III	Ambient Temperature Range	10°- 30°C	Bluetooth	Remote
Warranty	5 Year	Maximum Supply Length	3 metres	SDCM	≤3		
		Cut Lengths	25mm, 50mm (RGB/RGBW/ Tunable White)				
		Maximum Run Power	100W				
		No. of LED's	120/m, 240/m (Tunable White)				

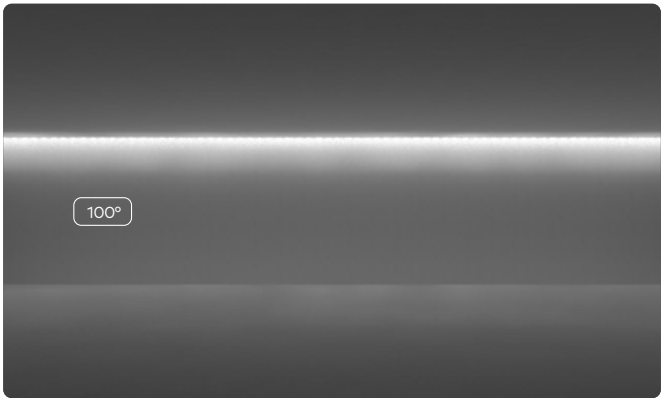

Available Accessories


GS35 End Cap (Allow 2mm length clearance per end cap)

GS35 Mounting Clip

GR45 End Cap (Allow 2mm length clearance per end cap for cutout dimensions)


GR45 Mounting Clip




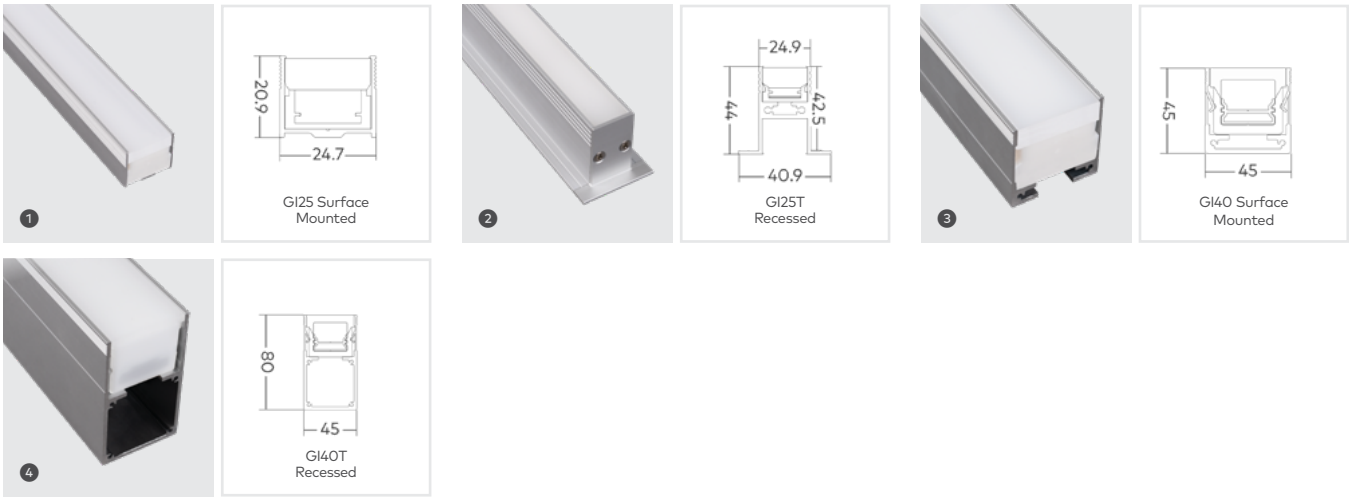

	LED Power	Lumens (at 3000K)	Beam	Cable Entry
1 Glide IP67 GI25 Surface Mounted	5W/m (24V DC)	266lm/m	110°	Rear, End
	10W/m (24V DC)	523lm/m		
	15W/m (24V DC)	767lm/m		
2 Glide IP67 GI25T Recessed	5W/m (24V DC)	266lm/m	110°	Rear, End
	10W/m (24V DC)	523lm/m		
	15W/m (24V DC)	767lm/m		
3 Glide IP67 GI40 Surface Mounted	5W/m (24V DC)	287lm/m	110°	Rear, End
	10W/m (24V DC)	550lm/m		
	15W/m (24V DC)	804lm/m		
	20W/m (24V DC)	1067lm/m		
	2x 15W/m (24V DC)	1558lm/m		
4 Glide IP67 GI40T Recessed	5W/m (24V DC)	287lm/m	110°	Rear, End
	10W/m (24V DC)	550lm/m		
	15W/m (24V DC)	804lm/m		
	20W/m (24V DC)	1067lm/m		
	2x 15W/m (24V DC)	1558lm/m		


Key Information		Design		Performance		Driver	
Mounting	Surface, Recessed	Product Family	Eclipse	Lumen efficacy	Up to 69lm/W	Non-Dim	Remote
Finish	<div> <div></div> Textured Black <div></div> Aluminium </div>	Material	Powdercoated Aluminum, PMMA Diffuser	CRI (Ra/R9)	90+ (R9: >50)	Phase Cut	Remote
Strip Compatibility	Eclipse EC10 (10mm)	IP Rating	IP67	Lifetime (Ta 25°C)	>54,000h L80B10	DALI	Remote
LED CCT	<div> <div></div> 2700K <div></div> 3000K <div></div> 4000K <div></div> RGB <div></div> RGBW <div></div> 2700K-6500K (Tunable White) </div>	Class Rating	Class III	Ambient Temperature Range	10°- 30°C	Bluetooth	Remote
Warranty	5 Year	Maximum Supply Length	3 metres	SDCM	≤3		
		Cut Lengths	25mm, 50mm (RGB/RGBW/ Tunable White)				
		Maximum Run Power	100W				
		No. of LED's	120/m, 240/m (Tunable White)				

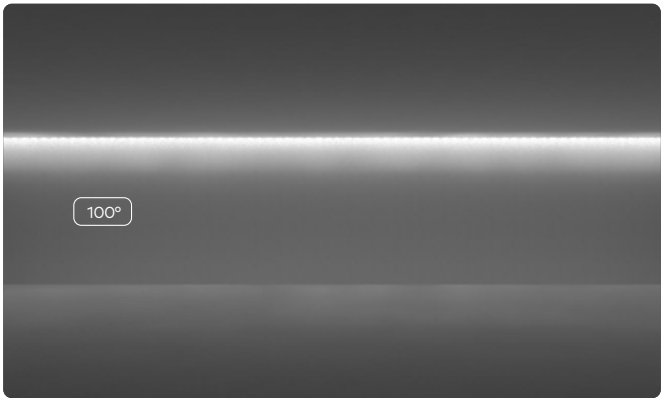

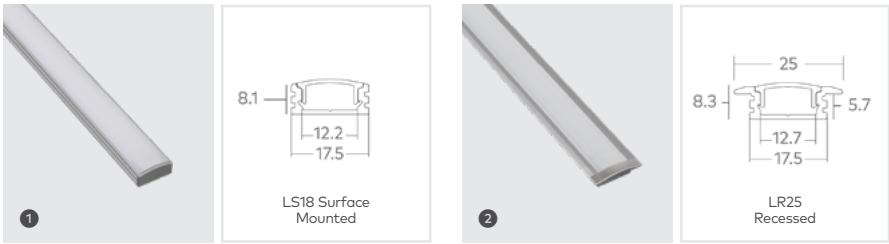

	LED Power	Lumens (at 3000K)	Beam	Cable Entry
1 Legacy LS18 Surface Mounted	5W/m (24V DC)	393lm/m	110°	Rear, End
	10W/m (24V DC)	770lm/m		
	15W/m (24V DC)	1122lm/m		
2 Legacy LR25 Recessed	5W/m (24V DC)	390lm/m	110°	Rear, End
	10W/m (24V DC)	763lm/m		
	15W/m (24V DC)	1114lm/m		

Key Information		Design		Performance		Driver	
Mounting	Surface	Product Family	Eclipse	Lumen efficacy	Up to 81lm/W	Non-Dim	Remote
Finish	<div><div></div> Textured Black</div> <div><div></div> Aluminium</div>	Material	Powdercoated Aluminum, PMMA Diffuser	CRI (Ra/R9)	90+ (R9: >50)	Phase Cut	Remote
Strip Compatibility	Eclipse EC6 (6mm)	IP Rating	IP20	Lifetime (Ta 25°C)	>54,000h L80B10	DALI	Remote
LED CCT	<div><div></div> 2700K</div> <div><div></div> 3000K</div> <div><div></div> 4000K</div>	Class Rating	Class III	Ambient Temperature Range	10°- 30°C	Bluetooth	Remote
Warranty	5 Year	Cut Lengths	25mm, 50mm (RGB/RGBW/ Tunable White)	SDCM	≤3		
		Maximum Supplied Lengths	3 metres				
		Maximum Run Power	EC6: 50W, EC10: 100W				
		No. of LED's	EC6: 300/m, EC10: 120/m				

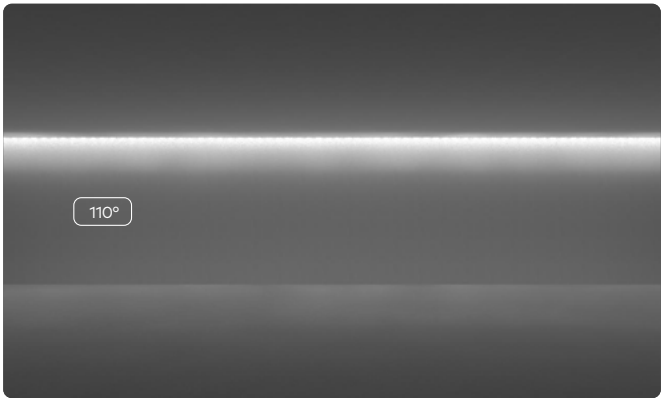

Available Accessories	Notes
GS10 2m and 3m Accessory Set (2x end caps (one with cable entry), 3x mounting clips and 3x mounting screws per metre)	RGB, RGBW and Tunable White options are only available with the EC10 Strip Light.

