



Kobe

Collection

1



2



3



1	Kobe Recessed Spotlight	Page 159	8W - 35W	See unios.com/koberecessed for more details
2	Kobe Surface Mounted Spotlight	Page 161	8W - 35W	See unios.com/kobesm for more details
3	Kobe Track Light	Page 191	8W - 35W	See unios.com/kobetack for more details




Kobe

Recessed Spotlight



		LED Power	Lumens (at 3000K)	Beam	Weight	Flo Horticulture	Driver
1	Kobe 8W Recessed	8W (200mA)	735lm	15° 36° 60°	935g	-	Phase Cut, DALI
2	Kobe 15W Recessed	15W (380mA)	1311lm	15° 36° 60°	1.0kg	-	Phase Cut, DALI, Bluetooth
3	Kobe 26W Recessed	26W (670mA)	2301lm	15° 36° 60°	1.6kg	Yes	Phase Cut, DALI, Bluetooth
4	Kobe 35W Recessed	35W (900mA)	3357lm	15° 36° 60°	1.8kg	-	Phase Cut, DALI, Bluetooth

Key Information		Design		Performance		Driver	
Mounting	Ceiling Recessed	Product Family	Kobe	Lumen efficacy	Up to 92lm/W	Phase Cut	Built in
Finish	■ Textured Black	Adjustability	350° Rotation, 90° Tilt	CRI (Ra/R9)	92+ (R9: >50), 97+ (R9: >90)	DALI	Remote
	□ Textured White/Black			UGR	<13	Bluetooth	Remote
	■ Textured Black/Gold	Material	Powder Coated Aluminium	Lifetime (Ta 25°C)	>55,000h L90B10		
LED CCT	■ 3000K	IP Rating	IP20	Ambient Temperature Range	10°- 30°C		
	■ 4000K	Class Rating	Class I (Phase Cut), Class II (DALI, Bluetooth)	SDCM	≤2		
	■ 2400K (Flo Horticulture)			COI Compliance model requirements	4000K		
Warranty	5 Year			PPF (Flo series)	Typical (43.2 umol/sec)		
				Active-PPF (Flo series)	Typical (21.9 umol/sec)		

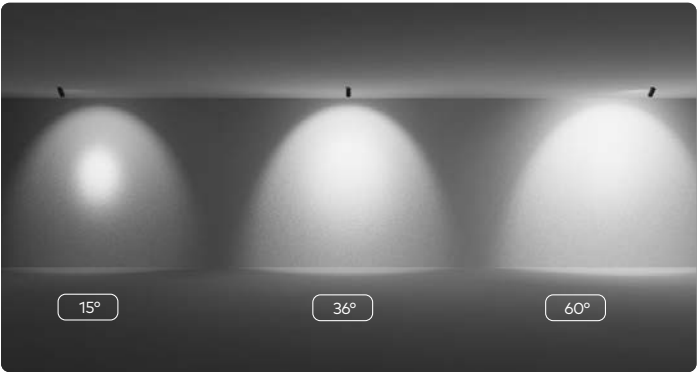

Available Accessories	Notes
Honeycomb Lens (for reduced glare)	Higher output Flo Horticulture options available upon request.
Linear Lens (for elliptical beam)	For CRI 97+ lumen outputs, please refer to the values on the Unios toolbox.






Kobe

Surface Mounted Spotlight




		LED Power	Lumens (at 3000K)	Beam	Weight	Flo Horticulture	Driver
1	Kobe 8W Surface Mounted	8W (200mA)	735lm	15° 36° 60°	878g	-	Phase Cut, DALI
2	Kobe 15W Surface Mounted	15W (380mA)	1311lm	15° 36° 60°	986g	-	Phase Cut, DALI, Bluetooth
3	Kobe 26W Surface Mounted	26W (670mA)	2301lm	15° 36° 60°	1.5kg	Yes	Phase Cut, DALI, Bluetooth
4	Kobe 35W Surface Mounted	35W (900mA)	3357lm	15° 36° 60°	1.7kg	-	Phase Cut, DALI, Bluetooth

Key Information		Design		Performance		Driver	
Mounting	Ceiling Surface	Product Family	Kobe	Lumen efficacy	Up to 92lm/W	Phase Cut	Built in
Finish	■ Textured Black	Adjustability	350° Rotation, 90° Tilt	CRI (Ra/R9)	92+ (R9: >50), 97+ (R9: >90)	DALI	Remote
	□ Textured White/Black						
	■ Textured Black/Gold						
	□ Textured White/Gold						
LED CCT	■ 3000K	Material	Powder Coated Aluminium	UGR	<13	Bluetooth	Remote
	■ 4000K						
	■ 2400K						
	(Flo Horticulture)						
Warranty	5 Year	IP Rating	IP20	Lifetime (Ta 25°C)	>55,000h L90B10		
		Class Rating	Class I	Ambient Temperature Range	10°- 30°C		
				SDCM	≤2		
				COI Compliance model requirements	4000K		
				PPF (Flo series)	Typical (43.2 umol/sec)		
				Active-PPF (Flo series)	Typical (21.9 umol/sec)		

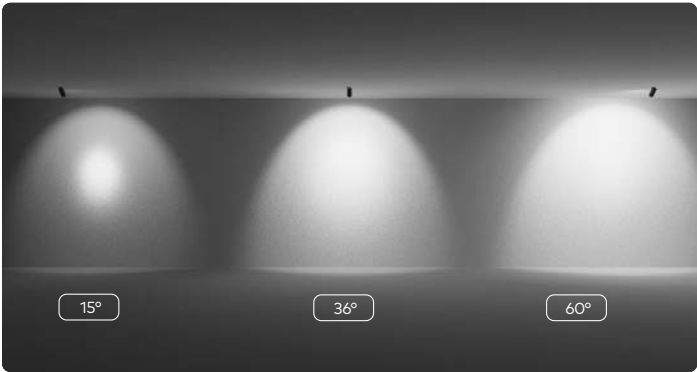


Available Accessories	Notes
Honeycomb Lens (for reduced glare)	Higher output Flo Horticulture options available upon request.
Linear Lens (for elliptical beam)	For CRI 97+ lumen outputs, please refer to the values on the Unios toolbox.



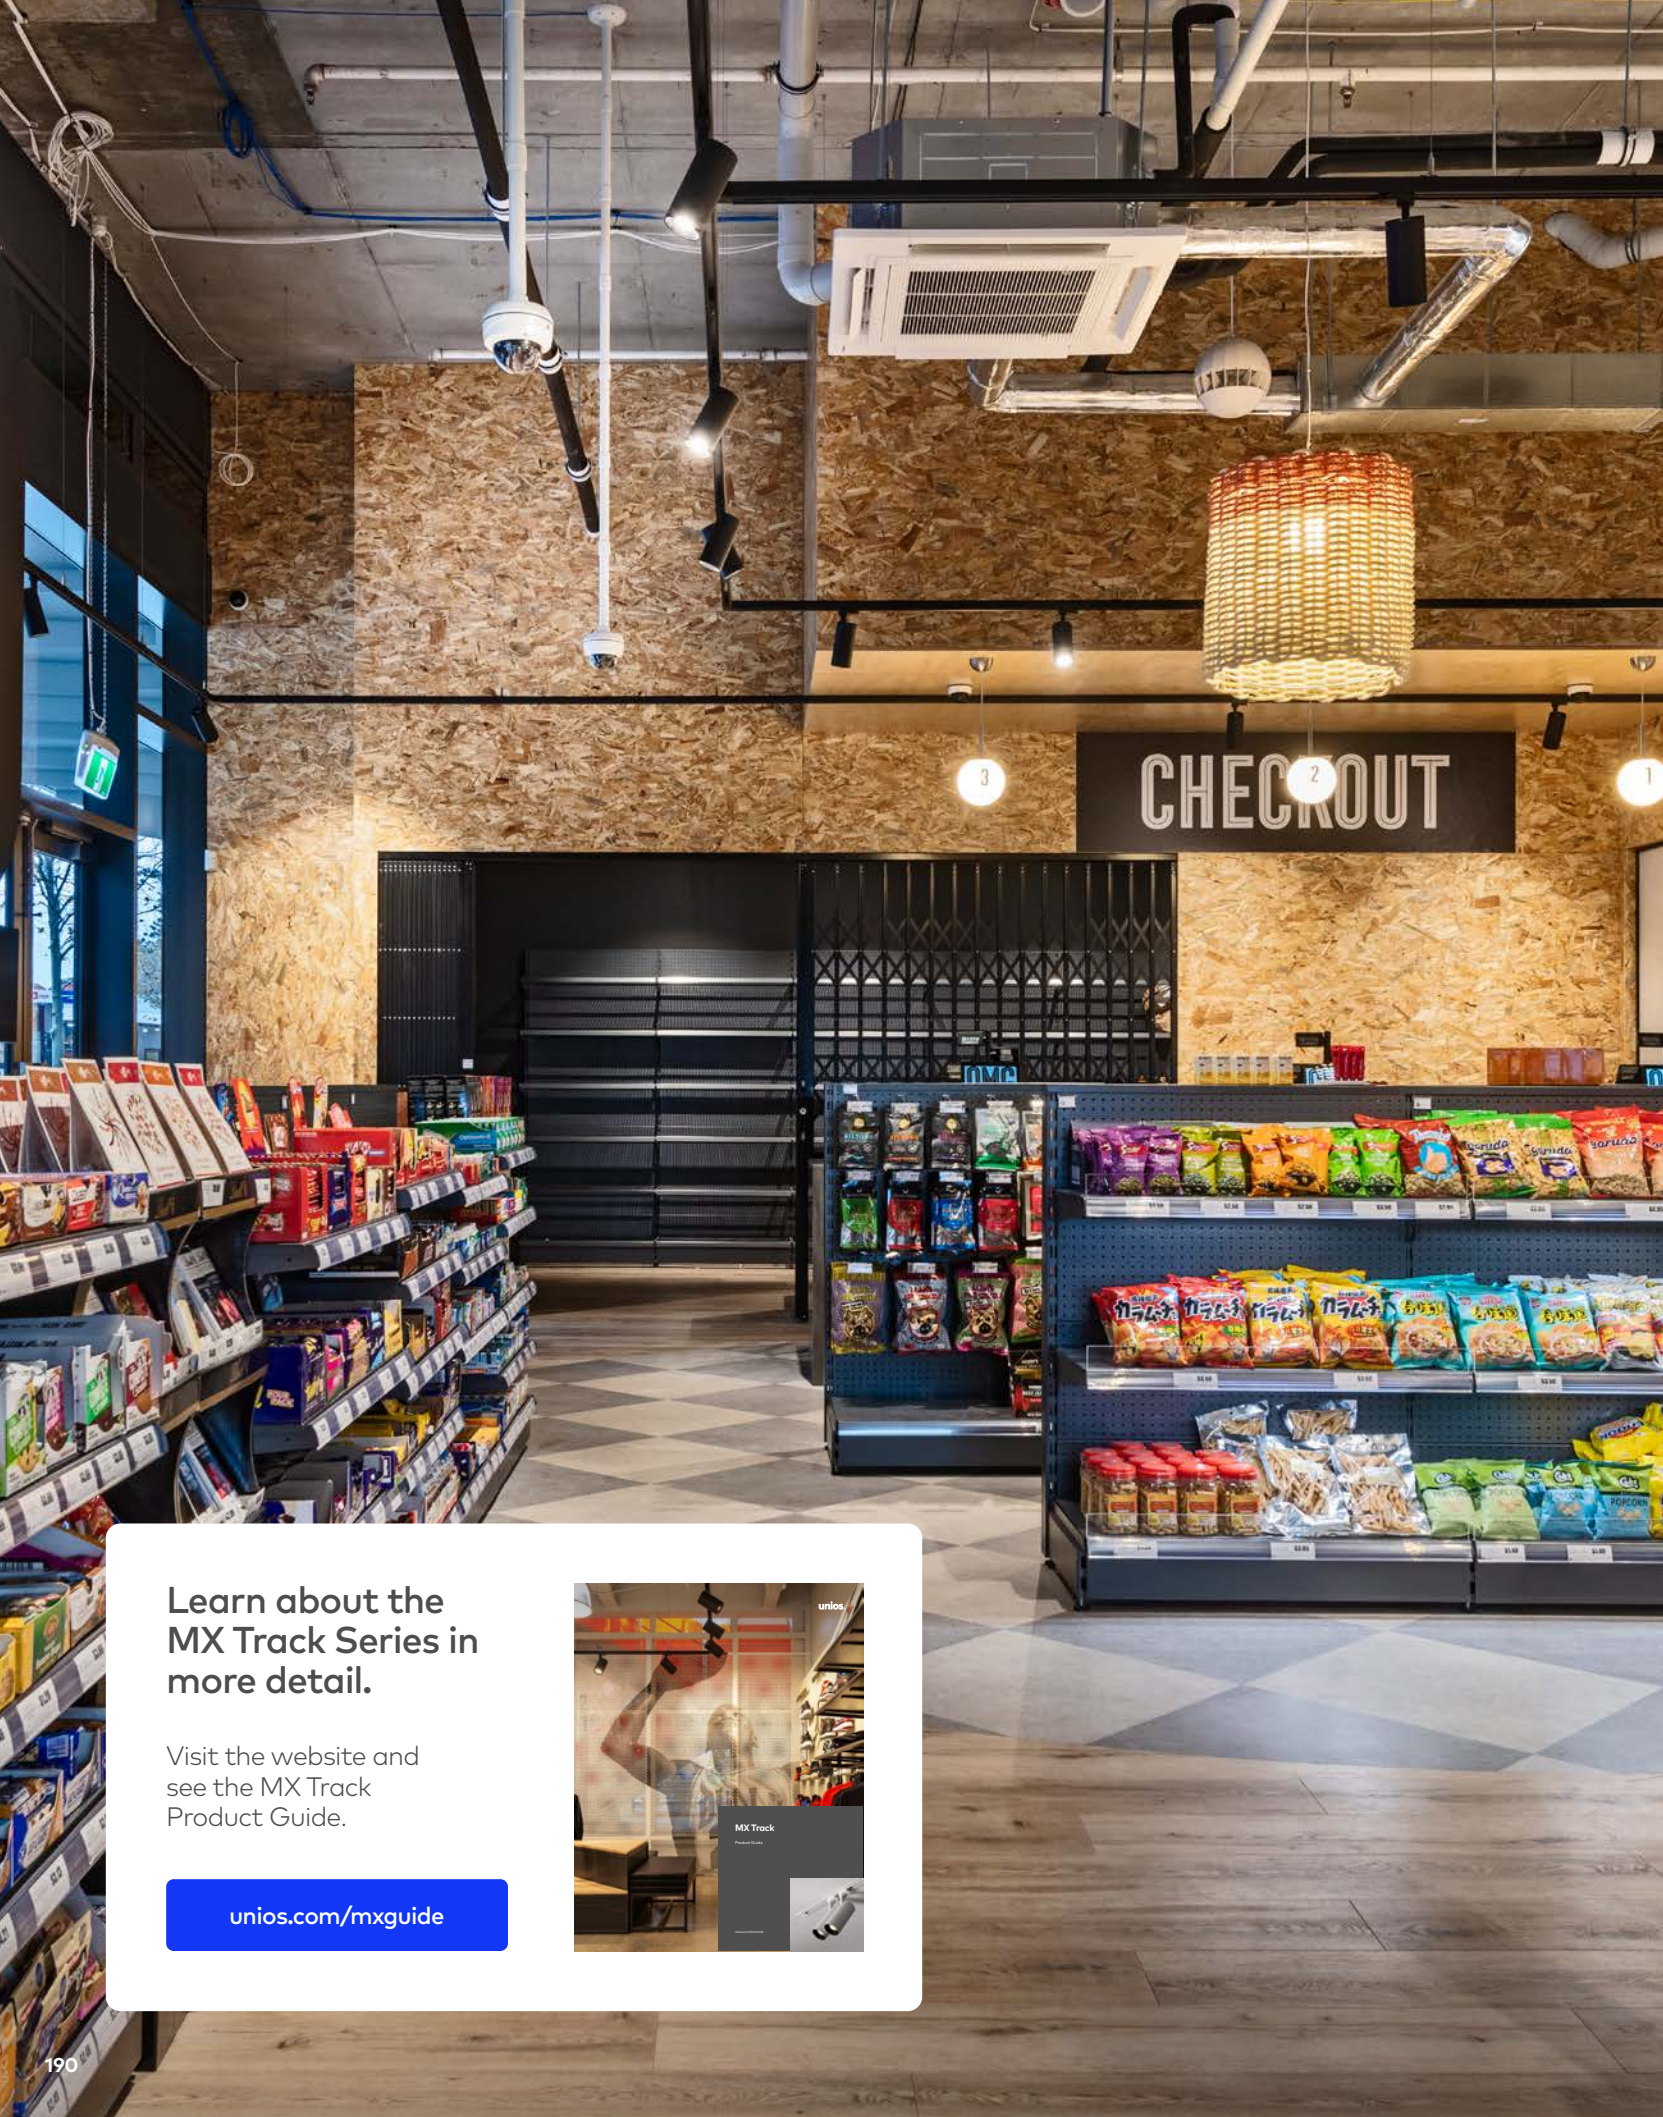

Kobe

Track Light

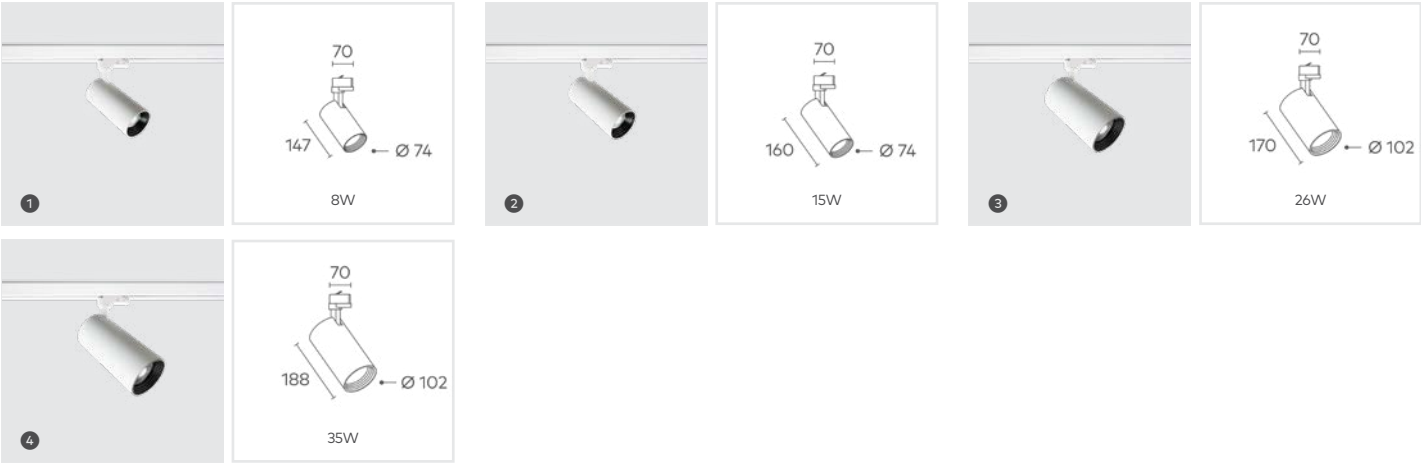

		LED Power	Lumens (at 3000K)	Beam	Weight	Flo Horticulture	Driver
1	Kobe 8W Track	8W (200mA)	735lm	15° 36° 60°	720g	-	Phase Cut, DALI
2	Kobe 15W Track	15W (380mA)	1311lm	15° 36° 60°	830g	-	Phase Cut, DALI, Bluetooth
3	Kobe 26W Track	26W (670mA)	2301lm	15° 36° 60°	1.3kg	Yes	Phase Cut, DALI, Bluetooth
4	Kobe 35W Track	35W (900mA)	3357lm	15° 36° 60°	1.6kg	-	Phase Cut, DALI, Bluetooth

Key Information		Design		Performance		Track & Driver Compatibility	
Mounting	Track	Product Family	Kobe	Lumen efficacy	Up to 92lm/W	Phase Cut	MX1 Built in, MX3 Built in
Finish	■ Textured Black □ Textured White/Black ■ Textured Black/Gold □ Textured White/Gold	Adjustability	350° Rotation, 90° Tilt	CRI (Ra/R9)	92+ (R9: >50), 97+ (R9: >90)	DALI	MX5 In-Track
		Material	Powder Coated Aluminium	UGR	<13	Bluetooth	MX5 In-Track
LED CCT	■ 3000K ■ 4000K ■ 2400K (Flo Horticulture)	IP Rating	IP20	Lifetime (Ta 25°C)	>55,000h L90B10		
Warranty	5 Year	Class Rating	Class I	Ambient Temperature Range	10°- 30°C		
				SDCM	≤2		
				COI Compliance model requirements	4000K		
				PPF (Flo series)	Typical (43.2 umol/sec)		
				Active-PPF (Flo series)	Typical (21.9 umol/sec)		




Available Accessories	Notes
Honeycomb Lens (for reduced glare)	Higher output Flo Horticulture options available upon request.
Linear Lens (for elliptical beam)	For CRI 97+ lumen outputs, please refer to the values on the Unios toolbox.



Learn about the MX Track Series in more detail.

Visit the website and see the MX Track Product Guide.


unios.com/mxguide

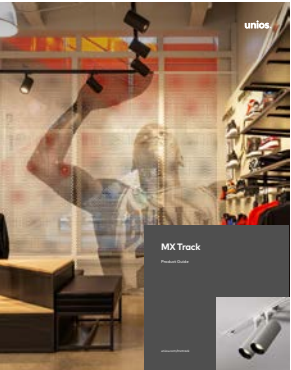



Kobe

Track Light



Kobe
Track Light
MX1 8W
Textured Black
Sylvan St Residence

Kobe
Track Light
MX3 15W DALI
Textured White/Black
UTAS Library at Inveresk



Kobe
Track Light
MX5 26W DALI
Textured Black
Built HQ

Kobe
Track Light
MX5 15W DALI
Textured White/Gold
HDR Office

Kobe

Track Light





Kobe

Track Light



Kobe
Track Light
MX3 15W
Textured Black
District Sky Bar

Kobe
Track Light
MX3 26W
Textured Black
Nike