


MX Collection



0	Kobe Track Light	Page 191	8W - 35W	See unios.com/kobetrack for more details
2	EQ Track Light	Page 199	10W	See unios.com/eqtrack for more details
3	Akira Track Light	Page 201	15W-20W	See unios.com/akiratrack for more details
4	Scope Track Light	Page 203	2W - 15W	See unios.com/scopetrack for more details
6	Axis Track Light	Page 205	7W - 15W	See unios.com/axistrack for more details
6	MX1 Single Circuit Track	Page 209	-	See unios.com/mxtrack for more details
0	MX3 Three Circuit Track	Page 210	-	See unios.com/mxtrack for more details
8	MX5 Three Circuit DALI Track	Page 212	-	See unios.com/mxtrack for more details



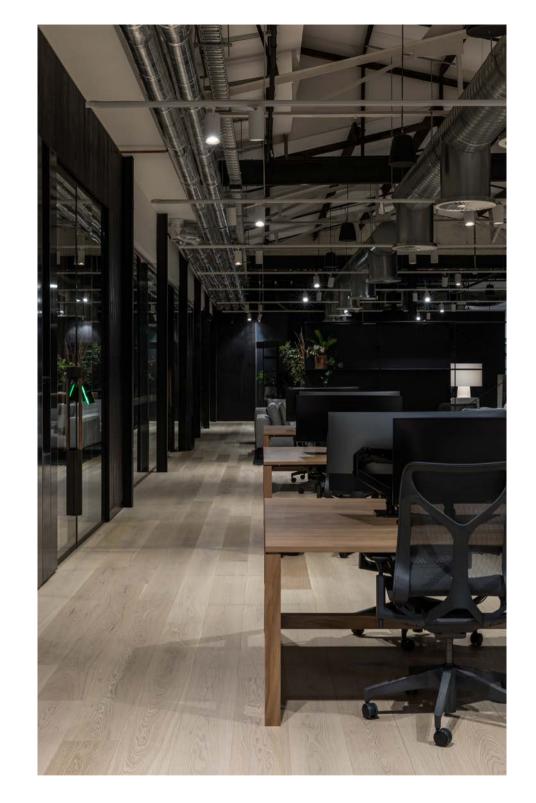





Axis Track Light MX3 15W Textured Black District Sky Bar

Kobe Track Light MX3 26W Textured White/Gold The Hayesbery














Axis Track Light MX1 15W Textured Black Il Mio Cafe

Akira R220 Track Light MX3 20W Textured Black Middle Park



35 MX1 Surface Mounted Track

Connectors

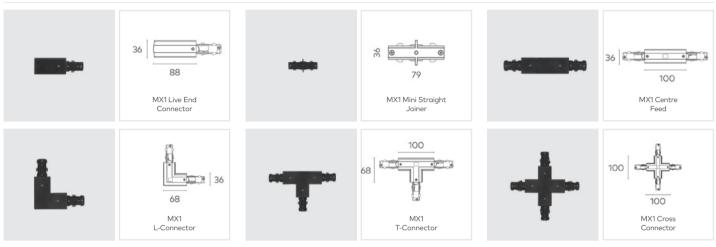

		Length		Maximum Load Bearing	
1 1	MX1 Surface Mounted Track	1000mm, 2000m	nm	30kg/m	
MX1 Suspended Track		1000mm, 2000mm		20kg/m	
Key Informat	tion	Design		Available Accessories	
Mounting	Ceiling Surface,	Material	Powder Coated	3m Wire Suspension Kit	
	Ceiling Suspended	- ID D .:	Aluminium	3m/5m Canopy Kit	
Finish	■ Textured Black □ Textured White	IP Rating	IP20		
\A/aurantı (3 Va ava				

Notes

Track Mount

Single Circuit (1C)

All MX1 Track is supplied with two end caps for a simple end-to-end solution.

¹Final load bearings are dependent on screws and mounting anchors used. It is the responsibility of the electrical contractor to check final weights.



Learn about the MX Track Series in

more detail.

Visit the website for the MX Track Series Product Guide.

unios.com/mxguide

100

MX3 Recessed

Centre Feed

100


MX3 Recessed

Cross Connector

100





















MX3 Centre

		Length	Maximum Load Bearing
0	MX3 Surface Mounted Track	1000mm, 2000mm, 3000mm	30kg/m
	MX3 Suspended Track	1000mm, 2000mm, 3000mm	20kg/m

Key Information	
Mounting	Ceiling Surface, Ceiling Suspended
Finish	■ Textured Black □ Textured White
Warranty	5 Years
Track Mount	Three Circuit (3C)

Design	
Material	Powder Coated Aluminium
IP Rating	IP20

Available Accessories	
End Cap	
3m/5m Wire Suspension Kit	
3m/5m Canopy Kit	
Rod Suspension Kit	
250/510mm Rod	
Track Cover Plate	

All accessories are supplied separately.
Please factor in these components when planning your track design.

¹Final load bearings are dependent on screws and mounting anchors used. It is the responsibility of the electrical contractor to check final weights.




MX3



MX3 Recessed

L-Connector

Connectors

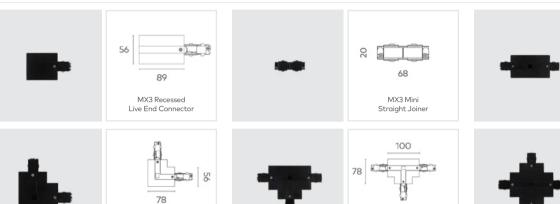

		Length	Maximum Load Bearing
0	MX3 Recessed Track	1000mm, 2000mm, 3000mm	30kg/m

MX3 Recessed

T-Connector

Key Information		Design		Available Accessories
Mounting	Ceiling Recessed	Material	Powder Coated	End Cap
Finish	■ Textured Black	Material	Aluminium	Swing Clip
FINISH	☐ Textured White	IP Rating	IP20	Track Cover Plate
Warranty	5 Years			

Track Mount

Three Circuit (3C)

All accessories are supplied separately.
Please factor in these components when planning your track design.

¹Final load bearings are dependent on screws and mounting anchors used. It is the responsibility of the electrical contractor to check final weights.


Edition 1.1.23 | Product design and technical data may be subject to change























MX5 Centre

		Length	Maximum Load Bearing
0	MX5 Surface Mounted Track	1000mm, 2000mm, 3000mm	30kg/m
	MYE Suspended Track	1000mm 2000mm 2000mm	20kg/m

Key Information	
Mounting	Ceiling Surface, Ceiling Suspended
Finish	■ Textured Black□ Textured White
Warranty	5 Years
Track Mount	Three Circuit DALI (5C)

esign		Availab
laterial	Powder Coated	End Co
TG COTTGT	Aluminium	3m/5m
Rating	IP20	3m/5m
		Rod Su

Available Accessories
End Cap
3m/5m Wire Suspension Kit
3m/5m Canopy Kit
Rod Suspension Kit
250/510mm Rod
Track Cover Plate

All accessories are supplied separately.
Please factor in these components when planning your track design.

¹Final load bearings are dependent on screws and mounting anchors used. It is the responsibility of the electrical contractor to check final weights.







MX5




Connectors










T-Connector


Swing Clip

Track Cover Plate

108







		Length		Maximun	n Load Bearing	
MX5 Recessed Track		1000mm, 2000mm, 3000mm		30kg/m		
Key Information		Design	Design		Available Accessories	
Mounting	Ceiling Recessed	Material	Powder Coated	Er	nd Cap	
			A luma in iuma			

Aluminium

IP20

IP Rating

■ Textured Black

5 Years Three Circuit DALI

Textured White

Finish

Warranty

Track Mount

All accessories are supplied separately.
Please factor in these components when planning your track design.

¹Final load bearings are dependent on screws and mounting anchors used. It is the responsibility of the electrical contractor to check final weights.

Edition 1.1.23 | Product design and technical data may be subject to change

