



Learn about the Node Series in more detail.

Visit the website for the Node Series Product Guide.

unios.com/nodeguide




Node

Collection



1	Node Recessed Darklight	Page 81	2W - 30W	See unios.com/noderecessed for more details
2	Node Adjustable Darklight	Page 82	10W - 20W	See unios.com/nodeadjustable for more details
3	Node IP65 Darklight	Page 83	10W - 20W	See unios.com/node65 for more details

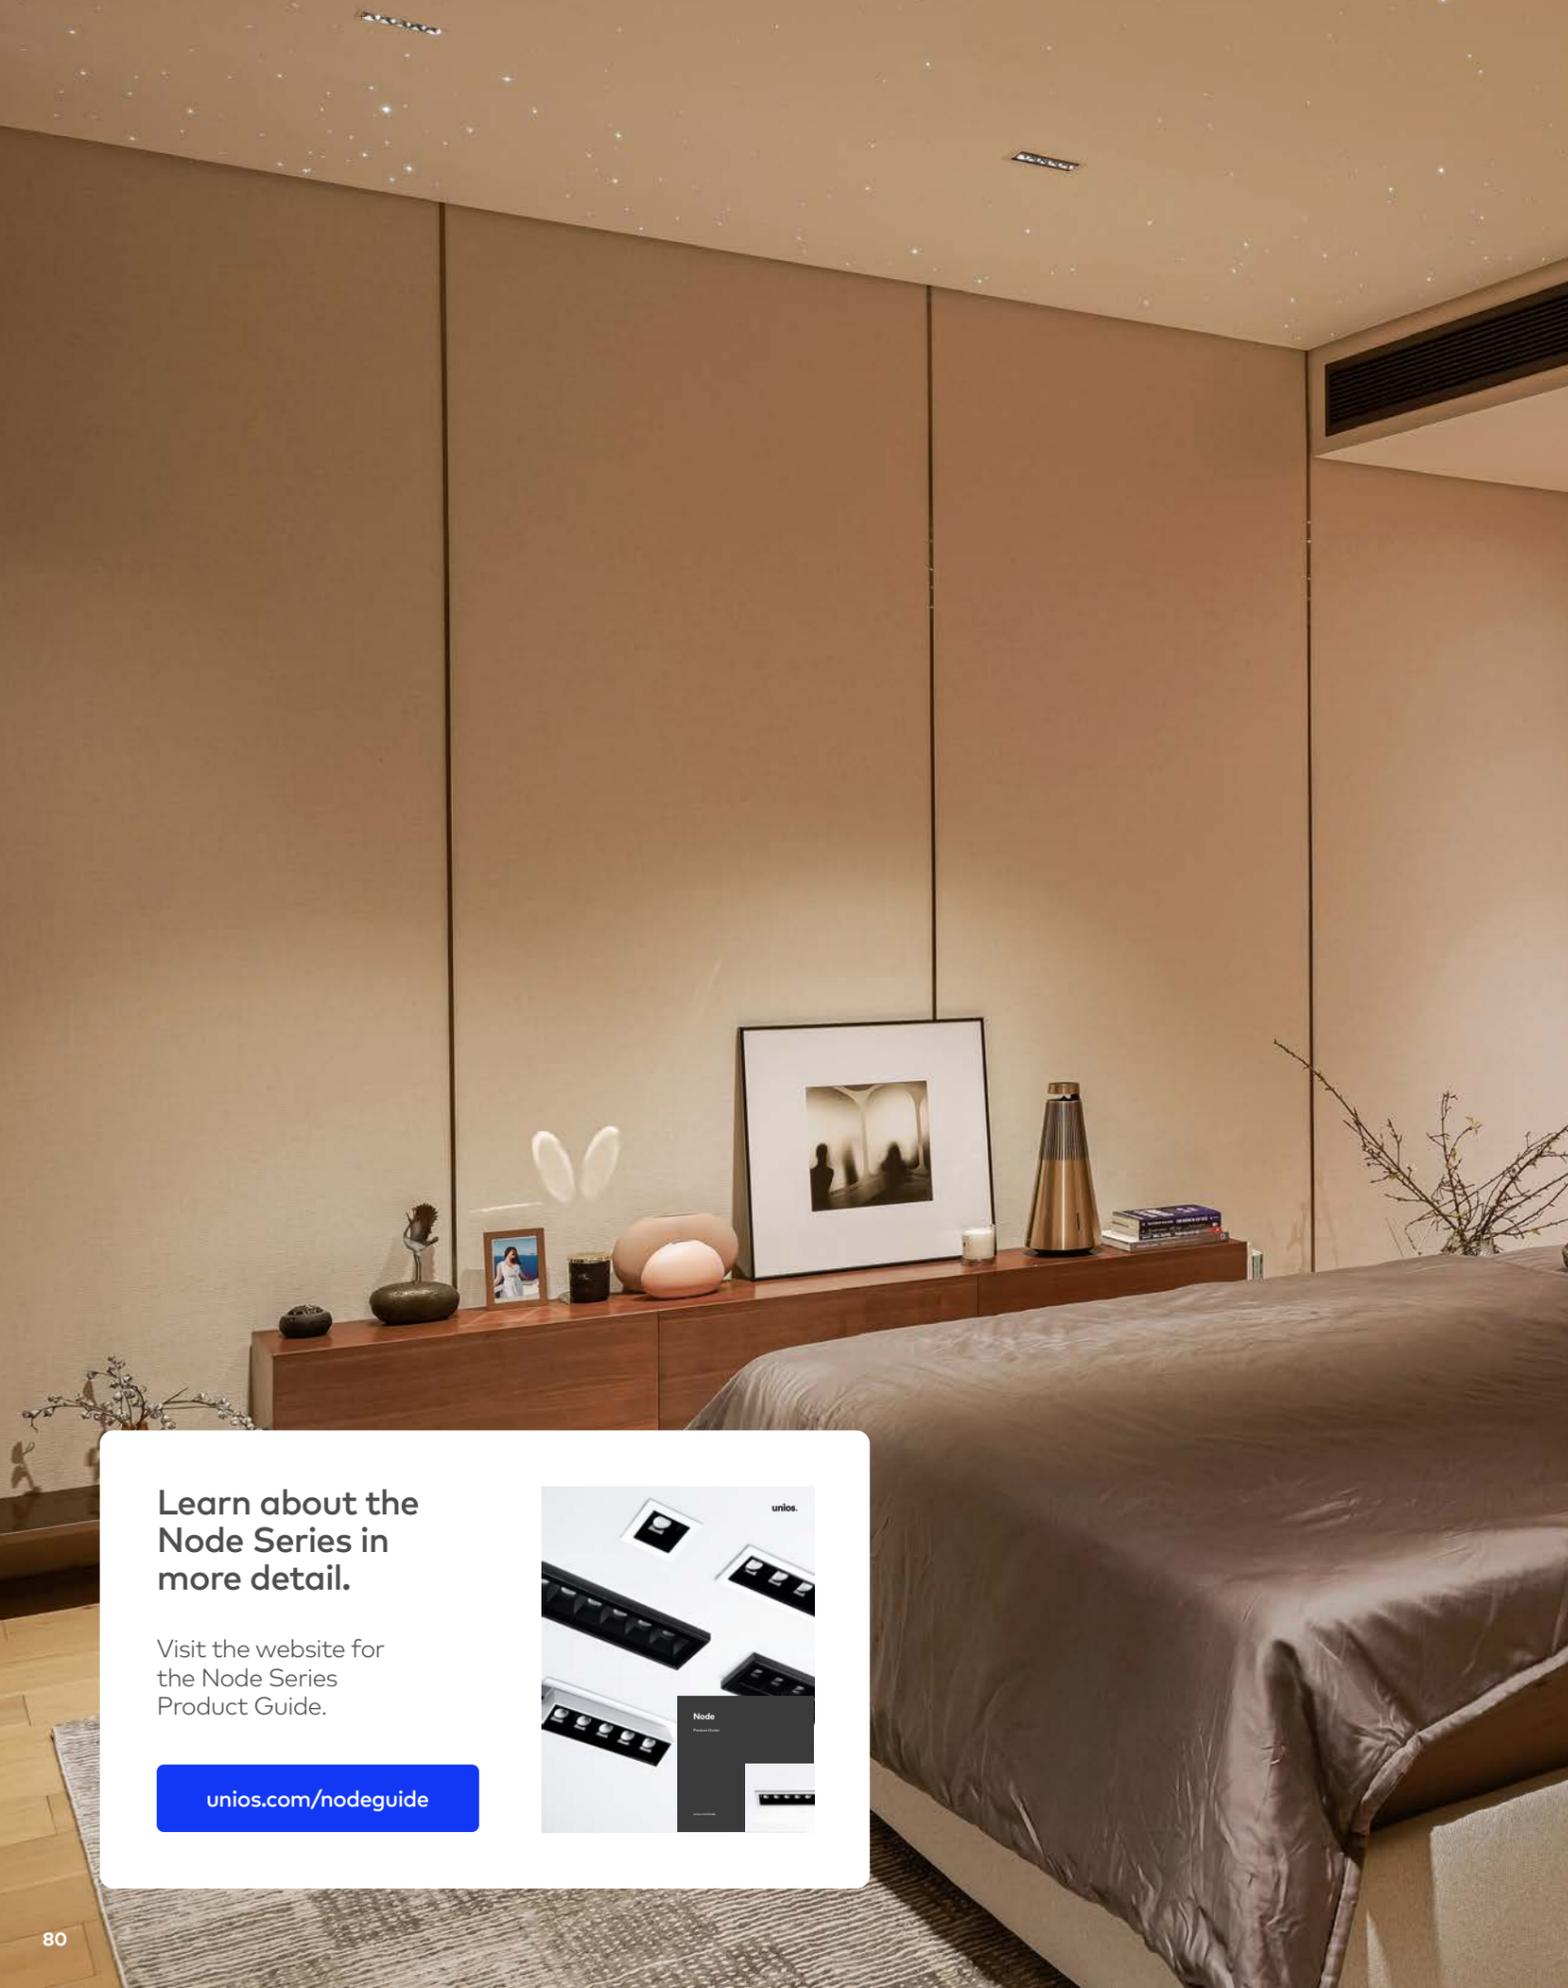

Node Recessed

Darklight




		LED Power	Lumens (at 3000K)	Beam	Weight	Driver Options
1	Node 1	2W (700mA)	176lm	46°	90g	Non-Dim, DALI, Bluetooth
2	Node 5	10W (700mA)	859lm	46°	345g	Phase Cut, DALI, Bluetooth
3	Node 10	20W (700mA)	1822lm	46°	690g	Phase Cut, DALI, Bluetooth
4	Node 15	30W (700mA)	2348lm	46°	1.0kg	Phase Cut, DALI, Bluetooth

Key Information		Design		Performance		Driver	
Mounting	Ceiling Recessed	Product Family	Node	Lumen efficacy	Up to 77lm/W	Non-Dim	Remote
Finish	<input type="checkbox"/> Textured Black <input type="checkbox"/> Textured White/Black	Material	Powder Coated Aluminium	CRI (Ra/R9)	90+ (R9: >50)	Phase Cut	Remote
LED CCT	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K	IP Rating	IP20	UGR	<10	DALI	Remote
Warranty	5 Year	Class Rating	Class II	Lifetime (Ta 25°C)	>66,000h L90B10	Bluetooth	Remote
		Insulation Rating	IC	Ambient Temperature Range	10°- 30°C	Driver Notes	
				SDCM	≤3	Node 1 must be wired in series in groups of 3-4 for dimmable solutions.	
				COI Compliance model requirements	4000K		

Learn about the Node Series in more detail.

Visit the website for the Node Series Product Guide.

unios.com/nodguide

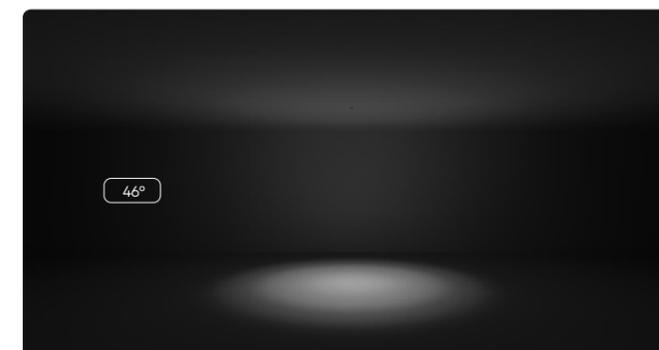


Node Adjustable

Darklight



		LED Power	Lumens (at 3000K)	Beam	Weight
1	Node Adjustable 5	10W (700mA)	859lm	46°	650g
2	Node Adjustable 10	20W (700mA)	1822lm	46°	1.3kg

Key Information		Design		Performance		Driver	
Mounting	Ceiling Recessed	Product Family	Node	Lumen efficacy	Up to 77lm/W	Phase Cut	Remote
Finish	<input checked="" type="checkbox"/> Textured Black <input type="checkbox"/> Textured White/Black	Adjustability	30mm extension, 45° Tilt	CRI (Ra/R9)	90+ (R9: >50)	DALI	Remote
LED CCT	<input checked="" type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K	Material	Powder Coated Aluminium	UGR	<10	Bluetooth	Remote
Warranty	5 Year	IP Rating	IP20	Lifetime (Ta 25°C)	>66,000h L90B10		
		Class Rating	Class II	Ambient Temperature Range	10°- 30°C		
		Insulation Rating	IC	SDCM	≤3		
				COI Compliance model requirements	4000K		

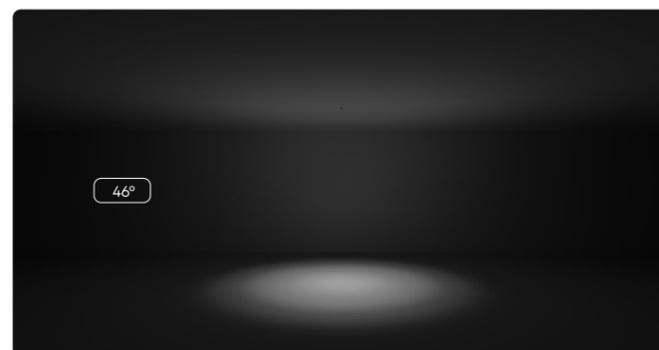

Node IP65

Darklight



		LED Power	Lumens (at 3000K)	Beam	Weight
1	Node IP65 5	10W (700mA)	836lm	46°	430g
2	Node IP65 10	20W (700mA)	1624lm	46°	860g

Key Information		Design		Performance		Driver	
Mounting	Ceiling Recessed	Product Family	Node	Lumen efficacy	Up to 70lm/W	Phase Cut	Remote
Finish	<input checked="" type="checkbox"/> Textured Black <input type="checkbox"/> Textured White/Black	Material	Powder Coated Aluminium	CRI (Ra/R9)	90+ (R9: >50)	DALI	Remote
LED CCT	<input checked="" type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K	IP Rating	IP65 (Room Side)	UGR	<10	Bluetooth	Remote
Warranty	5 Year	Class Rating	Class II	Lifetime (Ta 25°C)	>66,000h L90B10		
		Insulation Rating	IC-4	Ambient Temperature Range	10°- 30°C		
				SDCM	≤3		
				COI Compliance model requirements	4000K		

