

1	Scope Recessed Spotlight	Page 141	2W - 15W	See unios.com/scoperecessed for more details
2	Scope Surface Mounted Spotlight	Page 143	2W - 15W	See unios.com/scopesm for more details
3	Scope Track Light	Page 203	2W - 15W	See unios.com/scopetrack for more details



Scope

Recessed Spotlight



		LED Power	Lumens (at 3000K)	Beam	Weight	Lifetime (Ta 25°C)	SDCM
1	RE40 Recessed	2W (700mA)	163lm	5° 15° 24°	410g	>60,000h L80B10	≤3
2	RE60 Recessed	15W (400mA)	1497lm	15° 24° 36°	927g	>55,000h L90B10	≤2

Key Information		Design		Performance		Driver	
Mounting	Ceiling Recessed	Product Family	Scope	Lumen efficacy	Up to 89lm/W	Phase Cut	Remote
Finish	<input type="checkbox"/> Textured Black <input type="checkbox"/> Textured White	Adjustability	355° Rotation, 90° Tilt	CRI (Ra/R9)	90+ (R9: >50)	DALI	Remote
LED CCT	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K	Material	Powder Coated Aluminium	UGR	<10 (Black), <19 (White)	Bluetooth	Remote
Warranty	5 Year	IP Rating	IP20	Ambient Temperature Range	10°- 30°C	Driver Notes	
		Class Rating	Class II	COI Compliance model requirements	4000K	Scope 2W models require 3+ in series when using Tridonic basicDIM Bluetooth driver.	
		Insulation Rating	IC				



Available Accessories
Linear Lens (for elliptical beams)





Scope

Surface Mounted Spotlight



		LED Power	Lumens (at 3000K)	Beam	Weight	Lifetime (Ta 25°C)	SDCM	Driver
1	SM40 Surface Mounted	2W (700mA)	163lm	5° 15° 24°	505g	>60,000h L80B10	≤3	Non-Dim, Phase Cut, DALI, Bluetooth
2	SM60 Surface Mounted	15W (400mA)	1497lm	15° 24° 36°	1.1kg	>55,000h L90B10	≤2	Phase Cut, DALI, Bluetooth

Key Information		Design		Performance		Driver	
Mounting	Ceiling Surface	Product Family	Scope	Lumen efficacy	Up to 89lm/W	Non-Dim	Built in
Finish	<input type="checkbox"/> Textured Black <input type="checkbox"/> Textured White	Adjustability	355° Rotation, 90° Tilt	CRI (Ra/R9)	90+ (R9: >50)	Phase Cut	SM40: Remote, SM60: Built in
LED CCT	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K	Material	Powder Coated Aluminium	UGR	<10 (Black), <19 (White)	DALI	Remote
Warranty	5 Year	IP Rating	IP20	Ambient Temperature Range	10°- 30°C	Bluetooth	Remote
		Class Rating	Class I	COI Compliance model requirements	4000K	Driver Notes Scope SM40 require 3+ in series when using Tridonic basicDIM Bluetooth driver.	





Available Accessories
 Linear Lens (for elliptical beams)






Scope

Surface Mounted Spotlight

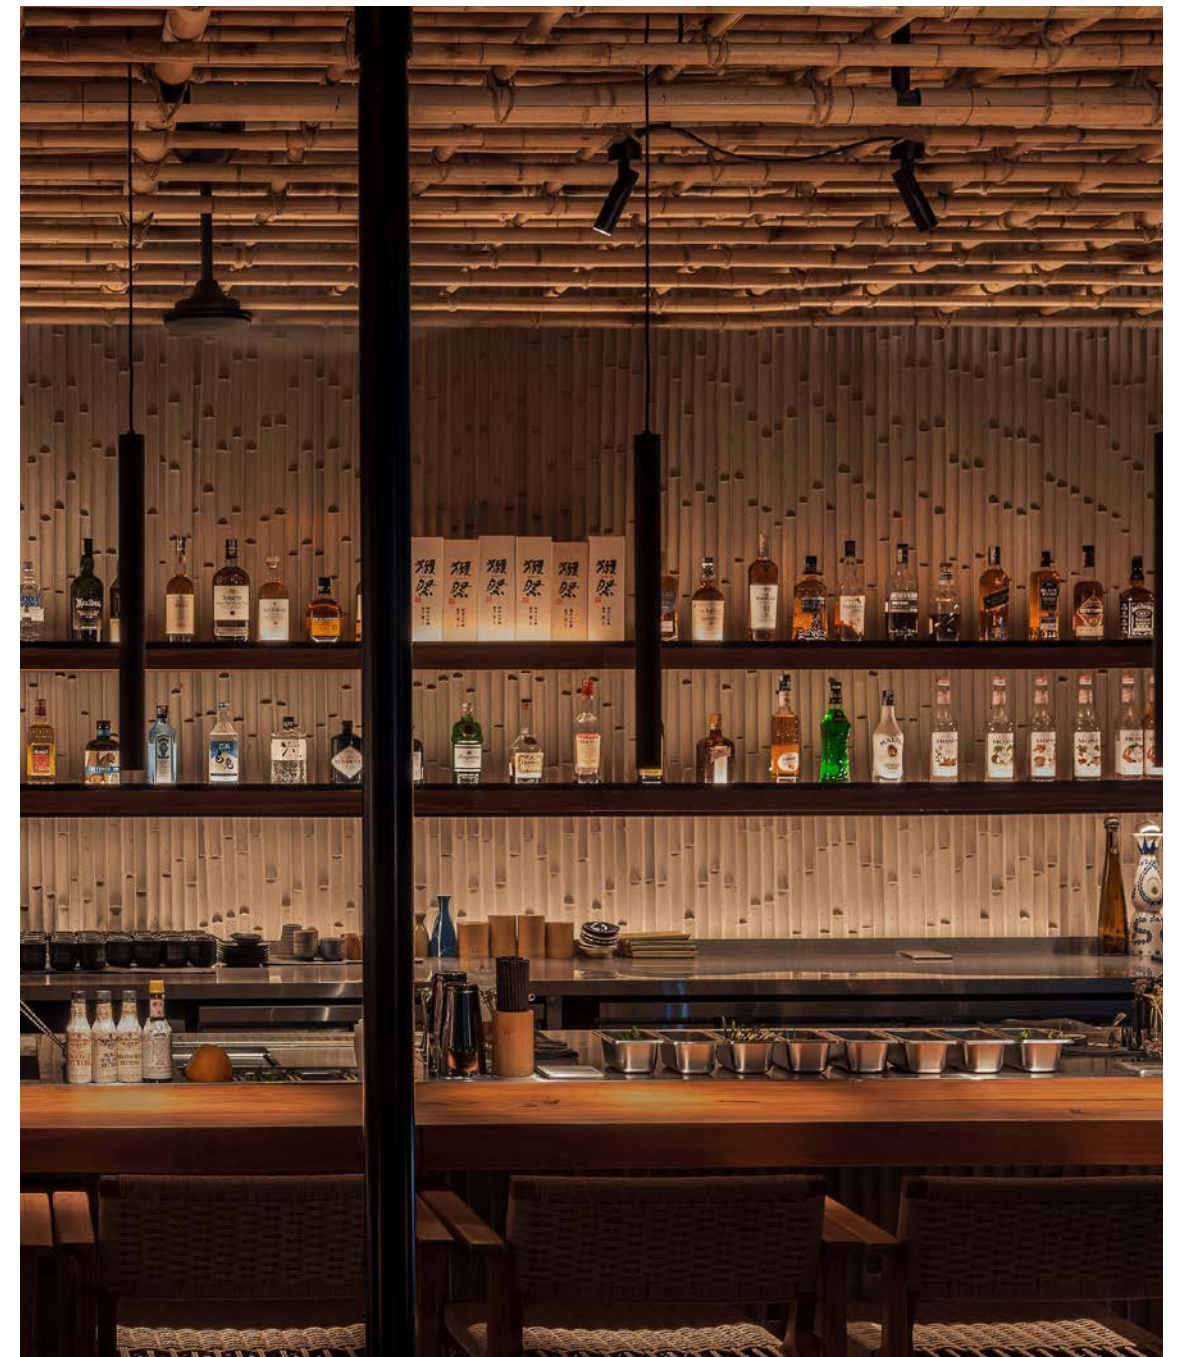

Scope
Surface Mounted Spotlight
SM40
Textured Black
Tre Dining

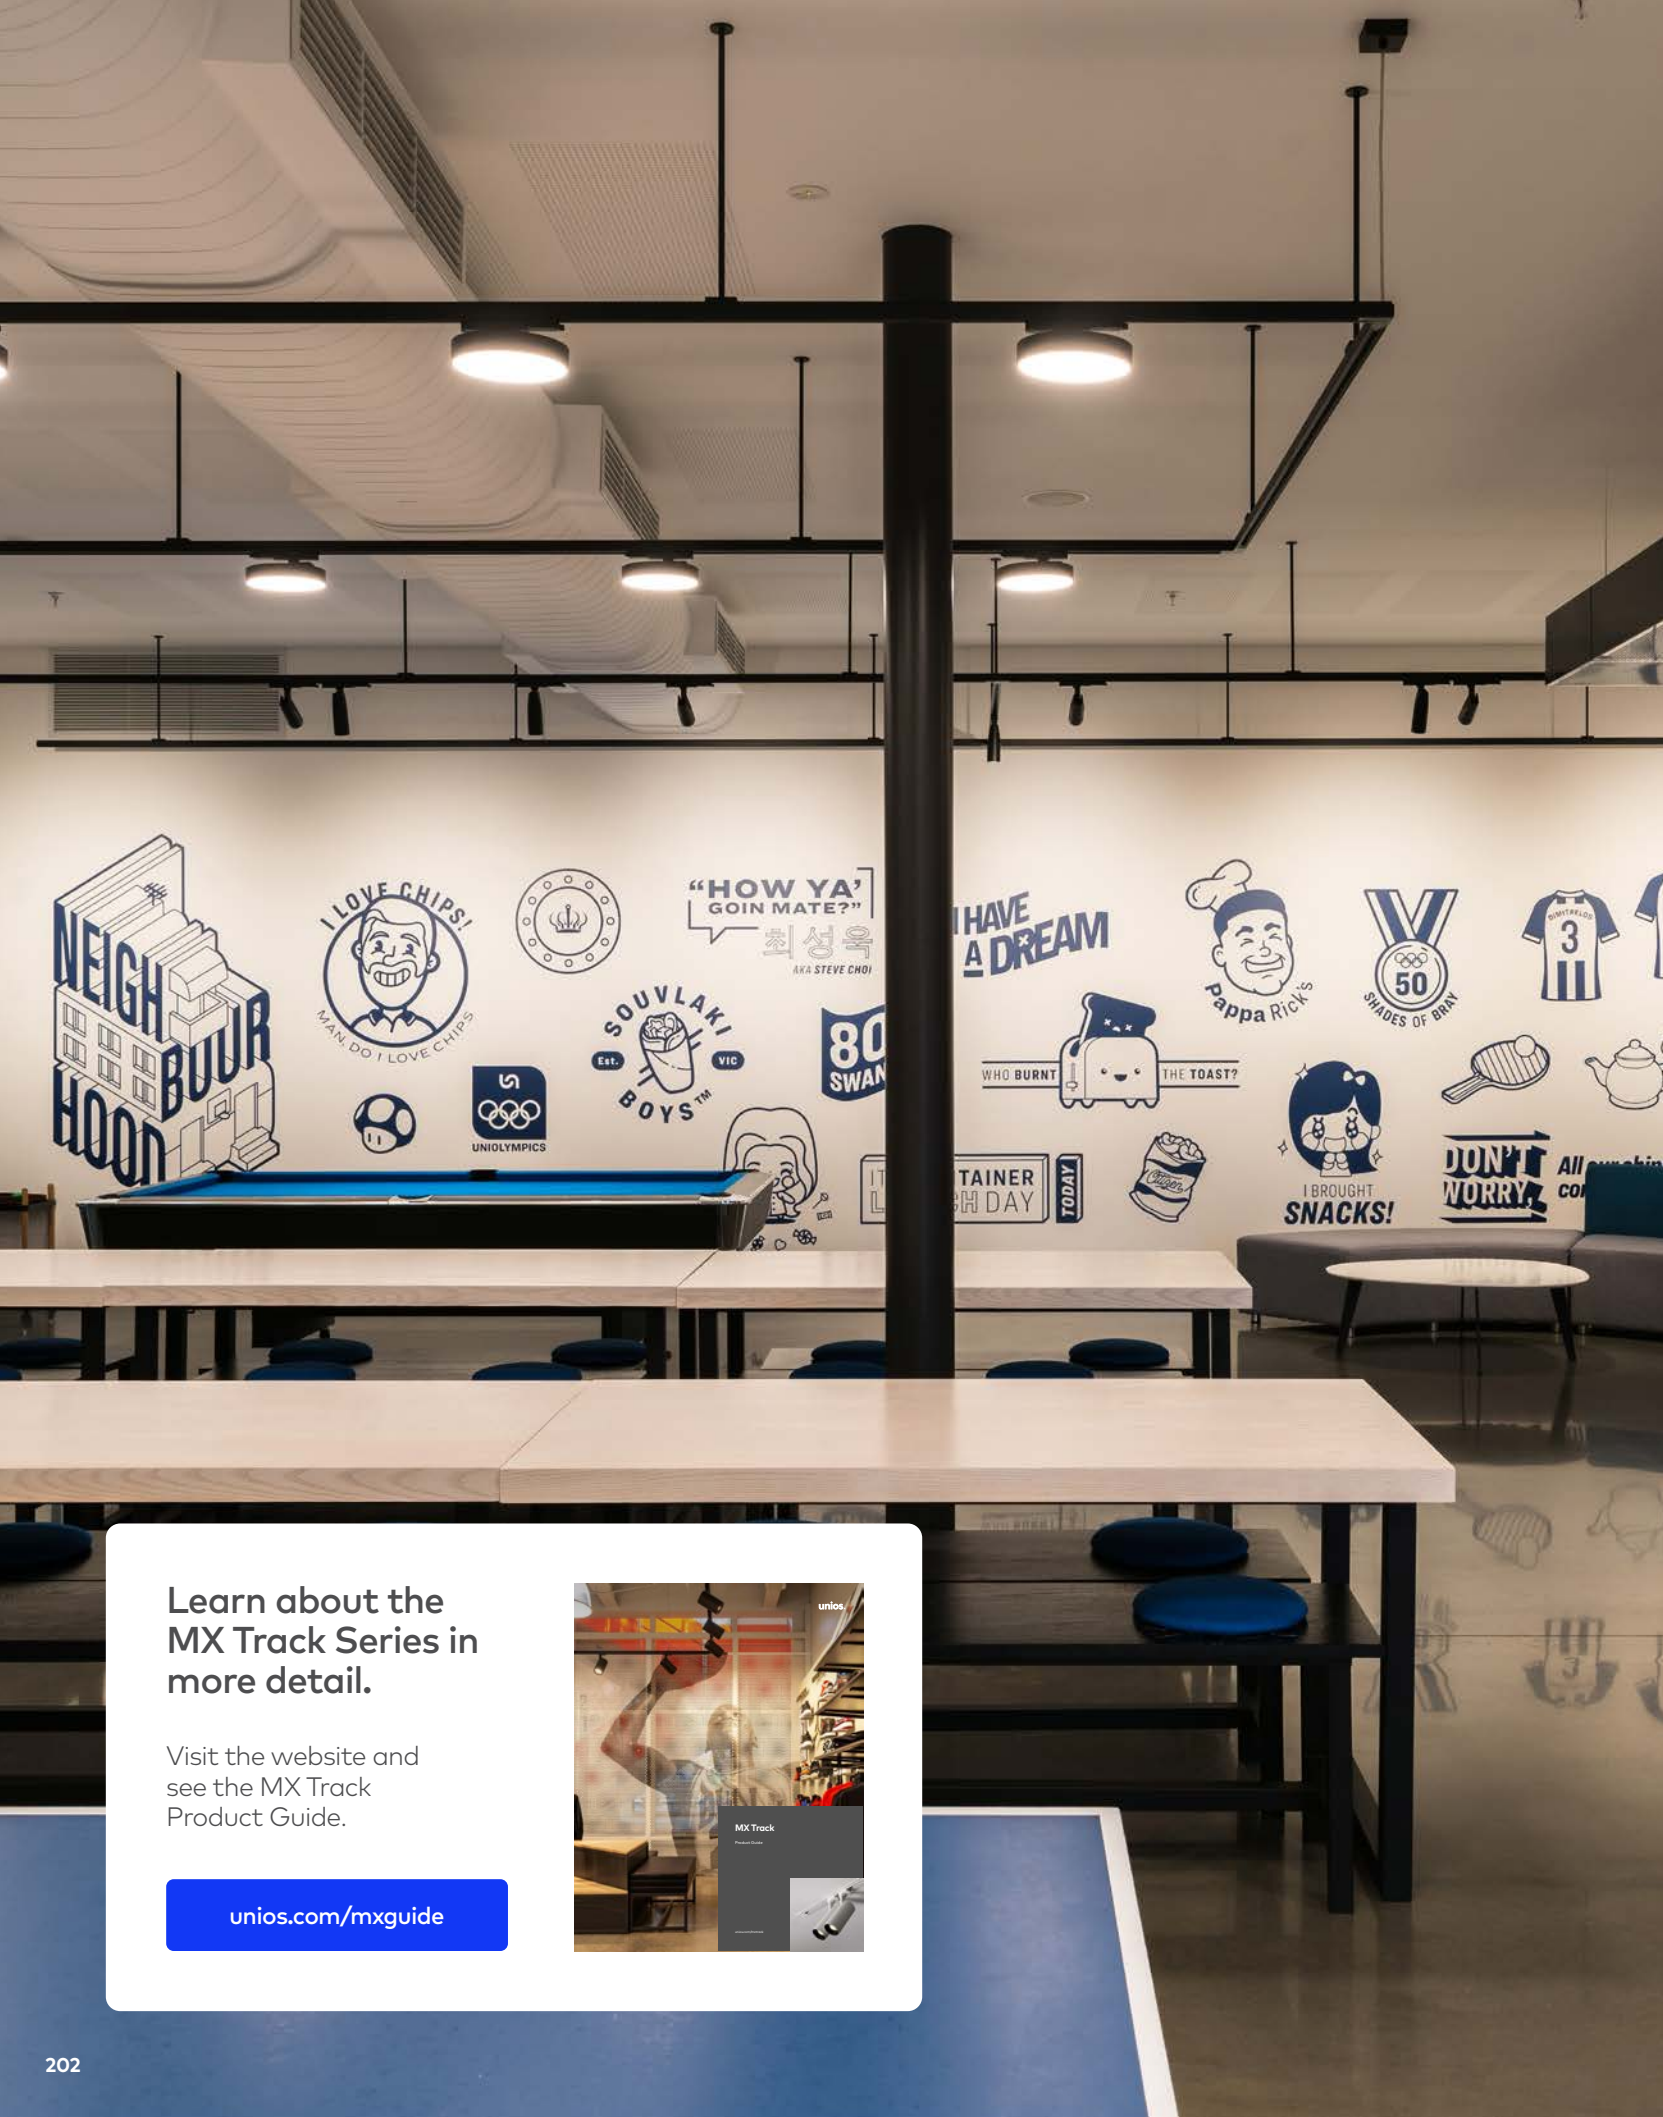

Scope

Track Light




		LED Power	Lumens (at 3000K)	Beam	Weight	Lifetime (Ta 25°C)	SDCM	Class	Driver
1	TR40	2W (700mA)	163lm	5° 15° 24°	290g	>60,000h L80B10	≤3	Class I	Non-Dim
2	TR60	15W (400mA)	1497lm	15° 24° 36°	920g	>55,000h L90B10	≤2	Class II	Phase Cut, DALI, Bluetooth

Key Information		Design		Performance		Track & Driver Compatibility	
Mounting	Track	Product Family	Scope	Lumen efficacy	Up to 89lm/W	Non-Dim	MX3 Built in
Finish	<input type="checkbox"/> Textured Black <input type="checkbox"/> Textured White	Adjustability	355° Rotation, 90° Tilt	CRI (Ra/R9)	90+ (R9: >50)	Phase Cut	MX3 In-Track
LED CCT	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K	Material	Powder Coated Aluminium	UGR	<10 (Black), <19 (White)	DALI	MX5 In-Track
Warranty	5 Year	IP Rating	IP20	Ambient Temperature Range	10°- 30°C	Bluetooth	MX5 In-Track
				COI Compliance model requirements	4000K		

Learn about the MX Track Series in more detail.

Visit the website and see the MX Track Product Guide.

unios.com/mxguide

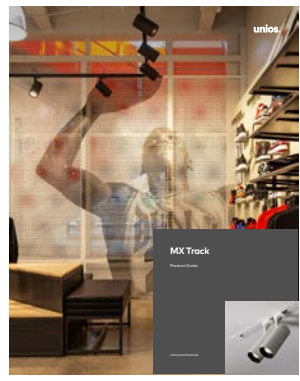

Available Accessories
Linear Lens (for elliptical beams)

