





## Switch

## Downlight

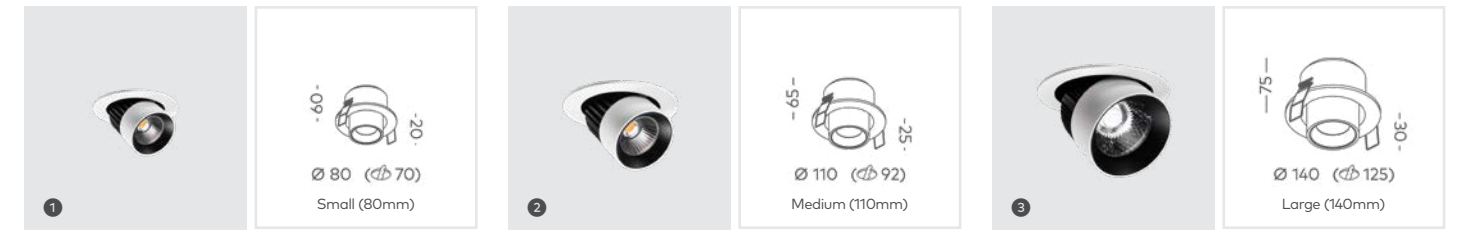

	LED Power	Lumens (at 3000K)	Beam	Weight
1 Small (80mm)	7W (200mA)	626lm	20°   40°   60°	364g
2 Medium (110mm)	14W (400mA)	1395lm	15°   40°   60°	620g
3 Large (140mm)	21W (600mA)	2018lm	15°   35°	1.1kg

Key Information		Design		Performance		Driver	
Mounting	Ceiling Recessed	Adjustability	350° Rotation, 90° Tilt	Lumen efficacy	Up to 83lm/W	Phase Cut	Remote
Finish	<input type="checkbox"/> Textured Black <input type="checkbox"/> Textured White/Black	Material	Powder Coated Aluminium	CRI (Ra/R9)	92+ (R9: >50)	DALI	Remote
LED CCT	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K	IP Rating	IP20	UGR	<19	Bluetooth	Remote
Warranty	5 Year	Class Rating	Class II	Lifetime (Ta 25°C)	>55,000h L90B10		
		Insulation Rating	IC	Ambient Temperature Range	10°- 30°C		
				SDCM	≤2		
				COI Compliance model requirements	4000K		

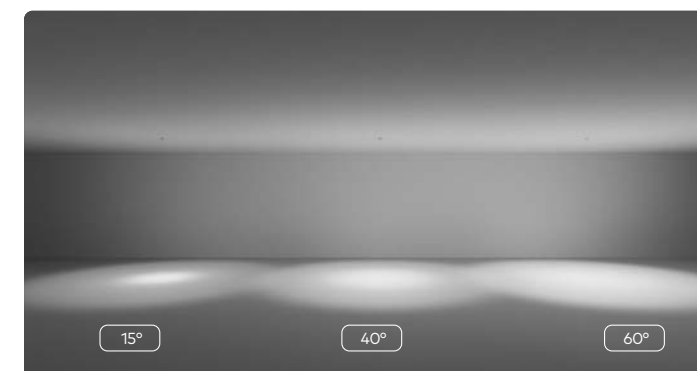



Available Accessories
Linear Lens (for elliptical beams)
Honeycomb Lens (for reduced glare)





Switch

Downlight



**Switch**  
Downlight  
Small (80mm)  
Textured Black  
Launceston Office

**Switch**  
Downlight  
Small (80mm)  
Textured White/Black  
Bayview Residence