Learn about the Titanium Series in more detail. Visit the website for the Titanium Series Product Guide. unios.com/titaniumguide

Titanium G2

Surface Mounted Downlight









15° | 36° | 60° | 75°



Weight

1.0g



130mm: Remote, 215mm: Built-in

130mm: Remote,

215mm: Built-in



5 Year

Warranty

215	
Ø 102	
Medium (215mm)	


LED Power

11W (300mA)

3 4 Me	edium	13W (350mA)	1188lm	15°	36° 60° 75°	1.1kg
Key Information		Design		Performance		Driver
Mounting	unting Ceiling Surface	Product Family	Titanium	Lumen efficacy	Up to 87lm/W	Phase Cut
Finish LED CCT	■ Textured Black □ Textured White ■ Textured Black/Gold □ Textured White/Gold ■ Textured Black/White	Material	Powder Coated Aluminium	CRI (Ra/R9)	92+ (R9: >50), 97+ (R9: >90)	DALI
		IP Rating	IP44	UGR	<16	DALI
		Class Rating	Class I	Lifetime (Ta 25°C)	>55,000h L90B10	Bluetooth
	☐ Textured White/Black ☐ 2700K			Ambient Temperature Range	10°-30°C	
	3000K			SDCM	≤2	
	4000K 2700K-6500K (Tunable White)			COI Compliance model requirements	4000K	
	3000K-1800K (Dusk Dimming)					

Lumens (at 3000K)

1004lm

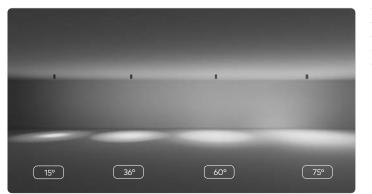


Available Accessories Linear Lens (for elliptical beams)


Honeycomb Lens (for reduced glare) Frosted Lens (75° beam)

Luminaire and surface mounted canister sold separately.

For CRI 97+ lumen outputs and polar diagrams, please refer to the Unios Toolbox.



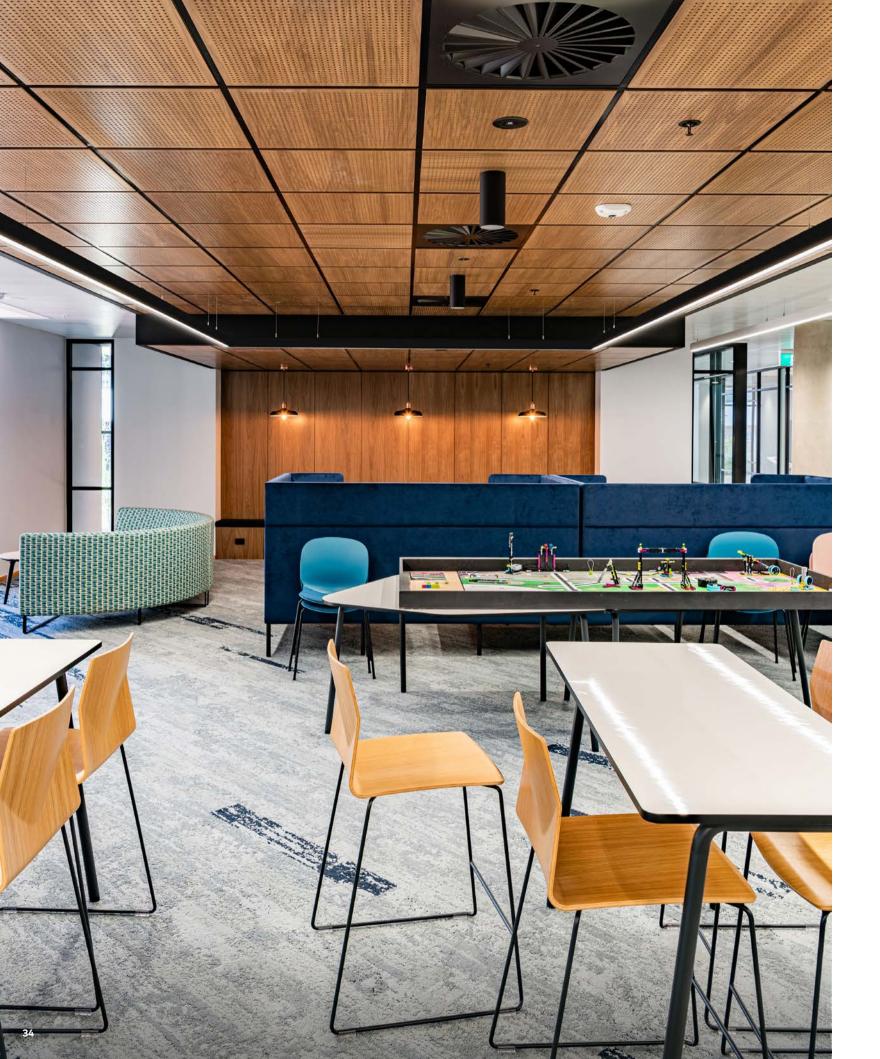

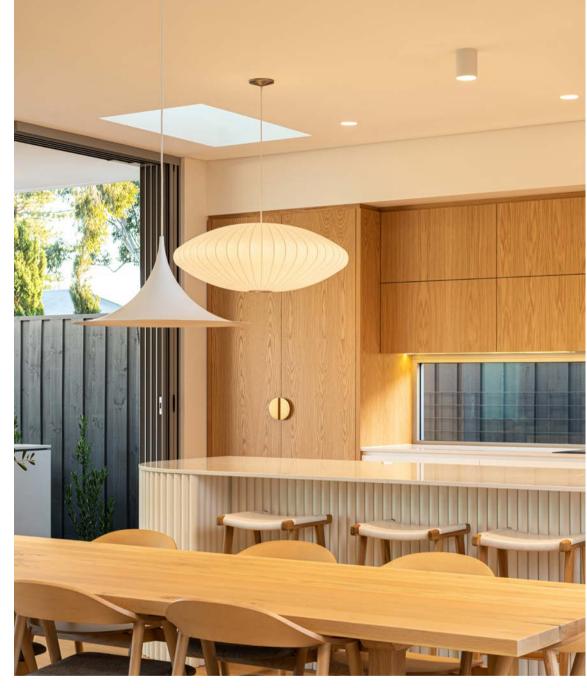





Titanium G2Surface Mounted Downlight Medium (215mm)
Textured Black
Iona Presentation College

Titanium G2Surface Mounted Downlight
Small (130mm)
Textured White
Prestige Homes







Titanium G2Surface Mounted Downlight
Small (130mm)
Textured Black
Kingswood Residence

Titanium G2Surface Mounted Downlight Medium (215mm)
Textured White
Linacre Residence

