

Titanium G2

Suspended Downlight




|     |        | LED Power   | Lumens (at 3000K) | Beam                  | Weight |
|-----|--------|-------------|-------------------|-----------------------|--------|
| 1 2 | Small  | 11W (300mA) | 1004lm            | 15°   36°   60°   75° | 1.5kg  |
| 3 4 | Medium | 13W (350mA) | 1188lm            | 15°   36°   60°   75° | 1.6kg  |

| Key Information |   | Design         |                         | Performance                       |                              | Driver    |                                |
|-----------------|---|----------------|-------------------------|-----------------------------------|------------------------------|-----------|--------------------------------|
| Mounting        | Ceiling Suspended   | Product Family | Titanium                | Lumen efficacy                    | Up to 87lm/W                 | Phase Cut | 130mm: Remote, 215mm: Built-in |
| Finish          | <div><div></div> Textured Black</div> <div><div></div> Textured White</div> <div><div></div> Textured Black/Gold</div> <div><div></div> Textured White/Gold</div> <div><div></div> Textured Black/White</div> <div><div></div> Textured White/Black</div> | Material       | Powder Coated Aluminium | CRI (Ra/R9)                       | 92+ (R9: >50), 97+ (R9: >90) | DALI      | 130mm: Remote, 215mm: Built-in |
|                 |   | IP Rating      | IP20                    | UGR                               | <16                          | Bluetooth | Remote                         |
|                 |   | Class Rating   | Class I                 | Lifetime (Ta 25°C)                | >55,000h L90B10              |           |                                |
|                 |   | Cable Length   | 3000mm                  | Ambient Temperature Range         | 10°- 30°C                    |           |                                |
|                 |   |                |                         | SDCM                              | ≤2                           |           |                                |
| LED CCT         | <div><div></div> 2700K</div> <div><div></div> 3000K</div> <div><div></div> 4000K</div> <div><div></div> 2700K-6500K (Tunable White)</div> <div><div></div> 3000K-1800K (Dusk Dimming)</div>   |                |                         | COI Compliance model requirements | 4000K                        |           |                                |
| Warranty        | 5 Year  |                |                         |                                   |                              |           |                                |

Learn about the  
Titanium Series in  
more detail.

Visit the website for  
the Titanium Series  
Product Guide.

[unios.com/titaniumguide](https://unios.com/titaniumguide)

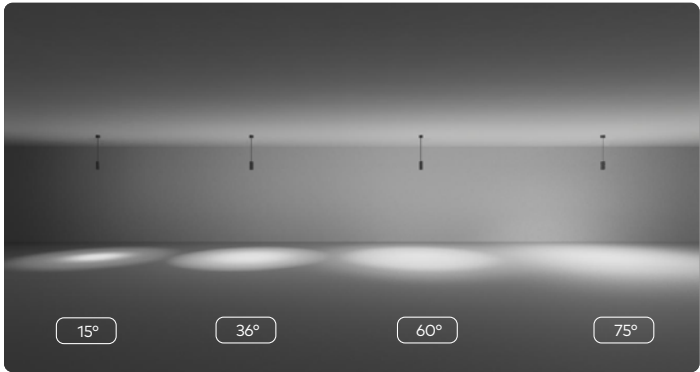

| Available Accessories              |  |
|------------------------------------|--|
| Linear Lens (for elliptical beams) |  |
| Honeycomb Lens (for reduced glare) |  |
| Frosted Lens (75° beam)            |  |

| Notes  |  |
|--|--|
| Luminaire and suspended canister sold separately.                                |  |
| For CRI 97+ lumen outputs and polar diagrams, please refer to the Unios Toolbox. |  |







Titanium G2



Suspended Downlight



**Titanium G2**  
Suspended Downlight  
Medium (215mm)  
Textured White  
Newtecons Tower

**Titanium G2**  
Suspended Downlight  
Medium (215mm)  
Textured Black/Gold  
Kitchen Warehouse HQ