

Learn about the
Titanium Series in
more detail.

Visit the website for
the Titanium Series
Product Guide.

unios.com/titaniumguide



Titanium Semi Recessed

Downlight



42

Ø 42 (Ø 35)

Micro (42mm)



55

Ø 78 (Ø 68)

Small (78mm)




100

Ø 114 (Ø 104)

Medium (114mm)

		LED Power	Lumens (at 3000K)	Beam	Weight	UGR	Lifetime (Ta 25°C)	Driver Options
1	Micro (42mm)	2W (700mA)	152lm	19° 30° 50°	114g	<13	>60,000h L90B10	Non-Dim, DALI, Bluetooth
2	Small (78mm)	9W (250mA)	849lm	15° 33° 50°	320g	<16	>55,000h L90B10	Phase Cut, DALI, Bluetooth
3	Medium (114mm)	15W (400mA)	1263lm	15° 33° 50°	665g	<16	>55,000h L90B10	Phase Cut, DALI, Bluetooth

Key Information		Design		Performance		Driver	
Mounting	Ceiling Recessed	Product Family	Titanium	Lumen efficacy	Up to 88lm/W	Non-Dim	Remote
Finish	<input checked="" type="checkbox"/> Textured Black <input type="checkbox"/> Textured White	Material	Powder Coated Aluminium	CRI (Ra/R9)	92+ (R9: >50)	Phase Cut	Remote
LED CCT	<input checked="" type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K	IP Rating	IP54 (Room Side)	Ambient Temperature Range	10°- 30°C	DALI	Remote
Warranty	5 Year	Class Rating	Class II	SDCM	≤2	Bluetooth	Remote
		Insulation Rating	IC-4	COI Compliance model requirements	4000K		

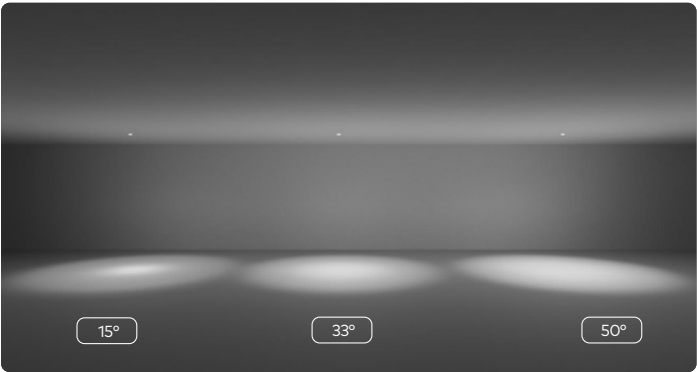



Titanium Semi Recessed

Downlight



Titanium
Semi Recessed Downlight
Small (78mm)
Textured White
Newtecons Tower

Titanium
Semi Recessed Downlight
Micro (42mm)
Textured White
Empire City Cove Residence