


Learn about the Titanium Series in more detail.


Visit the website for the Titanium Series Product Guide.

unios.com/titaniumguide

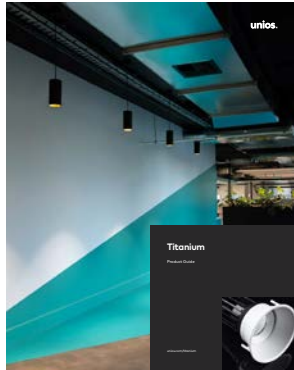


Titanium

Surface Mounted Starlight

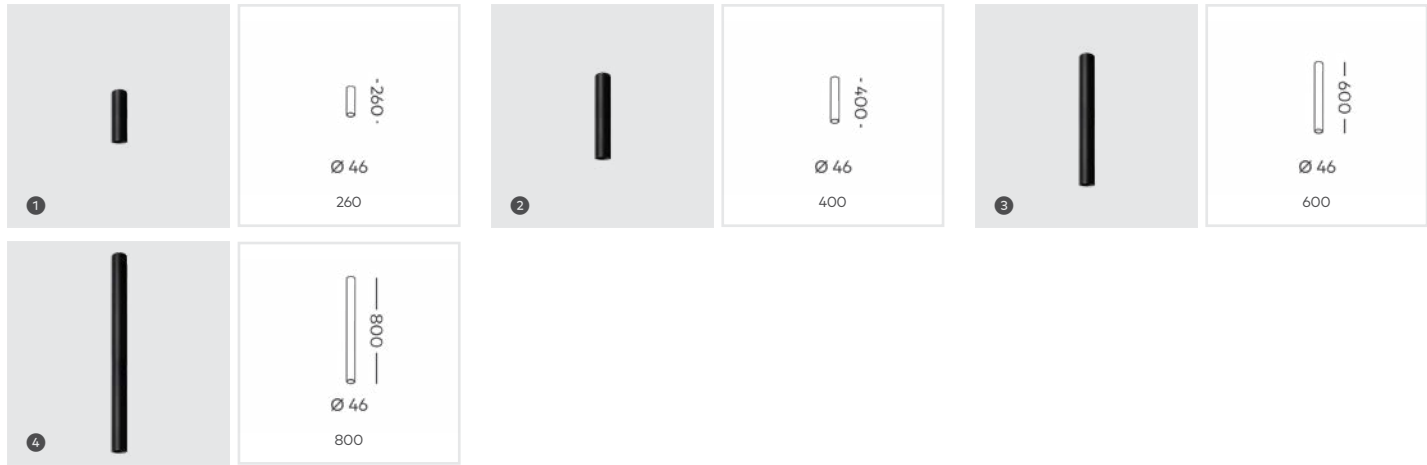

		LED Power	Lumens (at 3000K)	Beam	Weight
1	260 Surface Mounted Starlight	5W (150mA)	468lm	36° 50°	557g
2	400 Surface Mounted Starlight	5W (150mA)	468lm	36° 50°	791g
3	600 Surface Mounted Starlight	5W (150mA)	468lm	36° 50°	1.1kg
4	800 Surface Mounted Starlight	5W (150mA)	468lm	36° 50°	1.4kg

Key Information		Design		Performance		Driver	
Mounting	Ceiling Surface	Product Family	Titanium	Lumen efficacy	Up to 77lm/W	Phase Cut	Built in
Finish	■ Textured Black	Material	Powder Coated Aluminium	CRI (Ra/R9)	92+ (R9: >50)	DALI	Built in
	■ Textured White	IP Rating	IP20	UGR	<13		
	■ Textured Black/Gold	Class Rating	Class I	Lifetime (Ta 25°C)	>55,000h L90B10		
	■ Textured White/Gold			Ambient Temperature Range	10°- 30°C		
	■ Textured Black/White			SDCM	≤2		
	■ Textured White/Black			COI Compliance model requirements	4000K		
LED CCT	■ 2700K ■ 3000K ■ 4000K						
Warranty	5 Year						

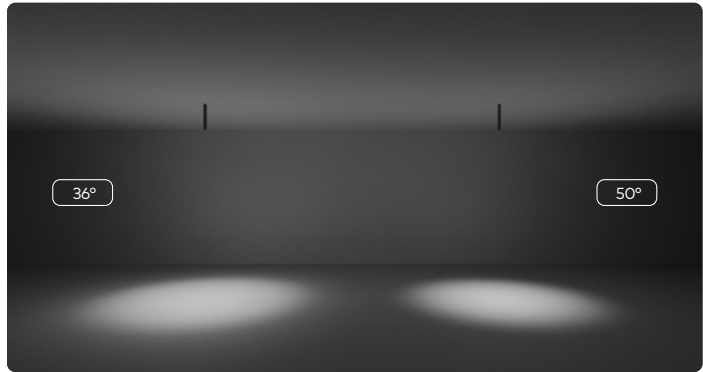

Notes
Luminaire and surface mounted canister sold separately.

