


		LED Power	Lumens (at 3000K)	Beam	Lifetime (Ta 25°C)	Weight
1	Accent Micro	3W (1000mA)	178lm	6° 15°	>31,000h L90B10	94g
2	Accent Mini	7W (600mA)	490lm	8° 20°	>108,000h L90B10	191g
3	Accent	7W (200mA)	593lm	12° 30°	>55,000h L90B10	355g

Key Information		Design		Performance		Driver	
Mounting	Ceiling Recessed	Product Family	ION	Lumen Efficacy	Up to 67lm/W	Non-Dim	Remote
Finish	<div> <div></div> Textured Black <div></div> Textured White </div>	Adjustability	355° Rotation with 25° Tilt, 30° Tilt (Accent Micro, Accent Mini)	CRI (Ra/R9)	92+ (R9: >50)	Phase Cut	Remote
LED CCT	<div> <div></div> 2700K <div></div> 3000K <div></div> 4000K <div></div> 2700K-6500K (Tunable White) </div>	Material	Powder Coated Aluminium	UGR (70/50/20)	<10	DALI	Remote
Warranty	5 Years	IP Rating	IP54 (Room Side)	Operating Ambient Temperature	-10°- 35°C	Bluetooth	Remote
		Class Rating	Class II	SDCM	<1.5, ≤3 (Accent Micro, Accent Mini)	Driver Notes Bluetooth is not compatible with the Accent Micro or Accent Mini model.	
		Insulation Rating	IC-4, CA90 (Accent Micro, Accent Mini)	COI Compliance Model Requirements	4000K		



Available Accessories	Notes
Honeycomb Lens (for reduced glare)	For the most narrow beam options for each model (6°, 8°, 12°), an anti-glare louvre is included to aid in beam control and glare.
Softening Lens (for softening beam edges)	

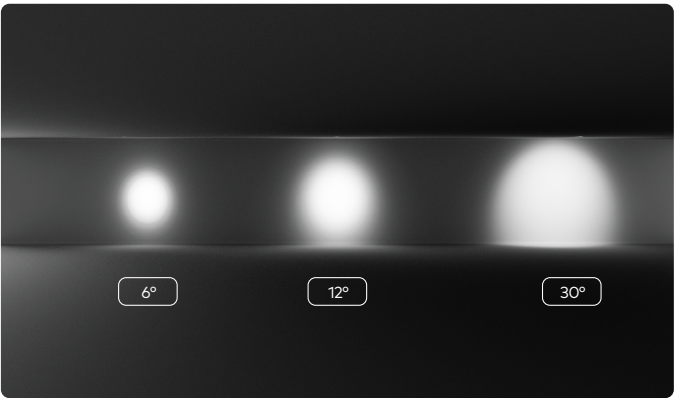