




|   |        | LED Power   | Lumens<br>(at 3000K) | Beam            | Beam (Elliptical)        | Lumen Efficacy | Lifetime (Ta 25°C) | Weight |
|---|--------|-------------|----------------------|-----------------|--------------------------|----------------|--------------------|--------|
| 1 | Micro  | 3W (1000mA) | 178lm                | 6°   15°   40°  | 10x60°   15x60°   40x70° | Up to 50lm/W   | >31,000h L90B10    | 94g    |
| 2 | Mini   | 7W (600mA)  | 490lm                | 8°   20°   50°  | 10x60°   20x60°   40x70° | Up to 64lm/W   | >108,000h L90B10   | 191g   |
| 3 | Small  | 7W (200mA)  | 659lm                | 12°   30°   50° | 12x60°   30x60°   40x70° | Up to 72lm/W   | >55,000h L90B10    | 355g   |
| 4 | Medium | 9W (250mA)  | 899lm                | 22°   40°   60° | 20x60°   35x70°   50x70° | Up to 90lm/W   | >55,000h L90B10    | 600g   |
|   |        | 13W (350mA) | 1258lm               |                 |                          |                |                    |        |
| 5 | Large  | 22W (600mA) | 2237lm               | 30°   45°   60° | 30x70°   45x60°   60x80° | Up to 95lm/W   | >55,000h L90B10    | 1310g  |
|   |        | 29W (800mA) | 2982lm               |                 |                          |                |                    |        |

| Key Information               |                                                                                                                                               | Design            |                                                     | Performance                       |                        | Driver                                                                                  |        |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-----------------------------------------------------|-----------------------------------|------------------------|-----------------------------------------------------------------------------------------|--------|
| Mounting                      | Ceiling Recessed                                                                                                                              | Product Family    | ION                                                 | CRI (Ra/R9)                       | 92+ (R9: >50)          | Non-Dim                                                                                 | Remote |
| Trim Finish                   | <div><div></div> Textured Black</div> <div><div></div> Textured White</div>                                                                   | Adjustability     | 355° Rotation with 25° Tilt, 30° Tilt (Micro, Mini) | UGR (70/50/20)                    | <13, <10 (Micro, Mini) | Phase Cut                                                                               | Remote |
| Baffle Finish                 | <div><div></div> Matt Black</div> <div><div></div> Matt White</div> <div><div></div> Stealth Metallic</div> <div><div></div> Matt Gold*</div> | Material          | Powder Coated Aluminium                             | Operating Ambient Temperature     | -10°- 35°C             | DALI                                                                                    | Remote |
| *Not available in large model |                                                                                                                                               | IP Rating         | IP54 (Room Side)                                    | SDCM                              | <1.5, ≤3 (Micro, Mini) | Bluetooth                                                                               | Remote |
|                               |                                                                                                                                               | Class Rating      | Class II                                            | COI Compliance Model Requirements | 4000K                  | <b>Driver Notes</b><br><i>Bluetooth is not compatible with the Micro or Mini model.</i> |        |
| LED CCT                       | <div><div></div> 2700K</div> <div><div></div> 3000K</div> <div><div></div> 4000K</div> <div><div></div> 2700K-6500K (Tunable White)</div>     | Insulation Rating | IC-4, CA90 (Micro, Mini, Large)                     |                                   |                        |                                                                                         |        |
| Warranty                      | 5 Years                                                                                                                                       |                   |                                                     |                                   |                        |                                                                                         |        |

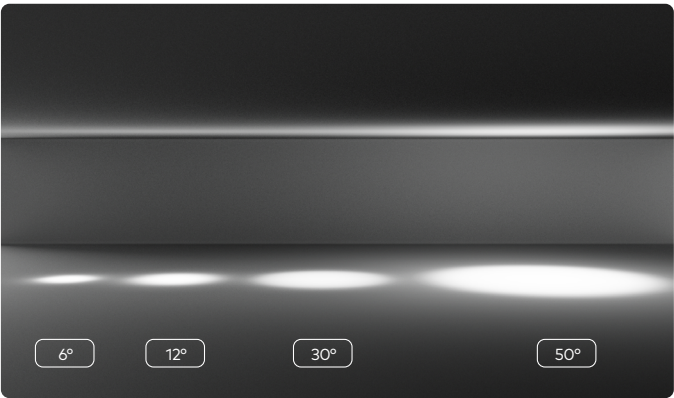

| Available Accessories                     |
|-------------------------------------------|
| Linear Lens (for elliptical beams)        |
| Honeycomb Lens (for reduced glare)        |
| Softening Lens (for softening beam edges) |
| Seismic Lanyard (for fixture security)    |

| Notes                                                                                                                                            |
|--------------------------------------------------------------------------------------------------------------------------------------------------|
| For the most narrow beam options below 22° for each model (6°, 8°, 12°, 22°), an anti-glare louvre is included to aid in beam control and glare. |

