



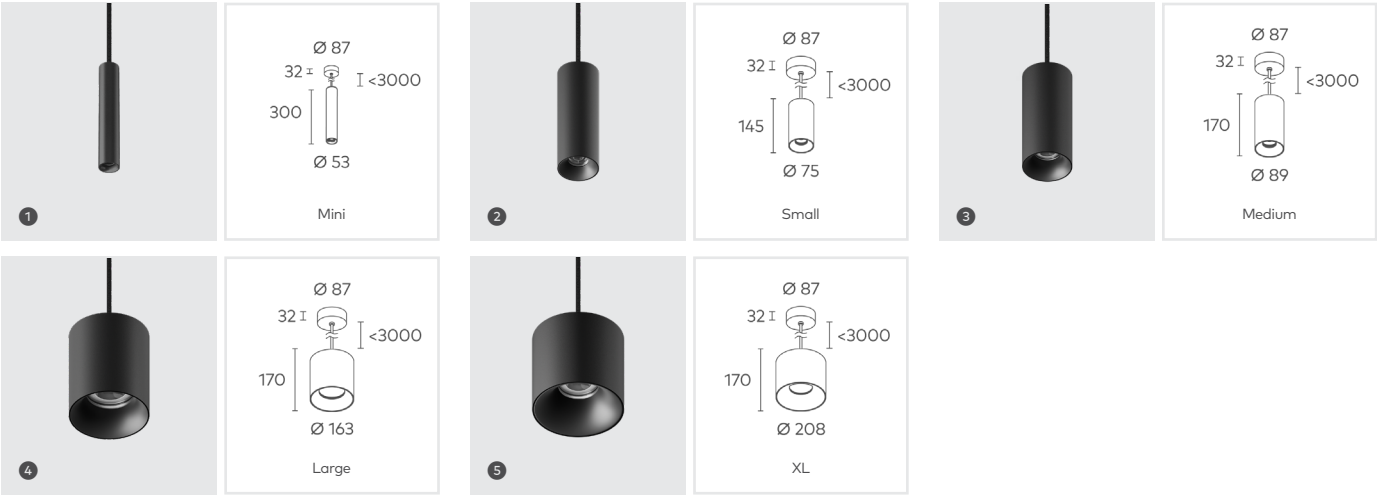

		LED Power	Lumens (at 3000K)	Beam	Beam (Elliptical)	Lumen Efficacy	Weight
1	Mini	7W (600mA)	490lm	8° 20° 50°	10x60° 20x60° 40x70°	Up to 64lm/W	1202g
2	Small	11W (300mA)	1155lm	22° 40° 60°	20x60° 30x70° 50x80°	Up to 93lm/W	1214g
3	Medium	15W (400mA)	1548lm	22° 40° 60°	20x60° 30x70° 50x80°	Up to 100lm/W	1455g
	Medium Wallwasher	15W (400mA)	868lm	50° Asymmetrical	-	Up to 56lm/W	1455g
4	Large	32W (900mA)	3587lm	30° 50° 70°	30x70° 50x80° 60x90°	Up to 98lm/W	2778g
	Large Wallwasher	32W (900mA)	1792lm	50° Asymmetrical	-	Up to 49lm/W	2778g
5	XL	43W (1200mA)	4767lm	30° 50° 70°	30x70° 50x80° 60x90°	Up to 105lm/W	4050g

Key Information		Design		Performance		Driver	
Mounting	Ceiling Suspended	Product Family	ION	CRI (Ra/R9)	92+ (R9: >50)	Non-Dim	Built-in
Canister Finish	Textured Black Textured White	Material	Powder Coated Aluminium	UGR (70/50/20)	<13, <10 (Mini)	Phase Cut	Built-in
Baffle Finish	Matt Black Matt White Stealth Metallic Matt Gold*	IP Rating	IP20	Lifetime (Ta 25°C)	>55,000h L90B10, >108,000h L90B10 (Mini)	DALI	Built-in, Remote (Mini)
*Not available in Large and XL model		Class Rating	Class I	Operating Ambient Temperature	-10°- 35°C	Bluetooth	Remote
Wallwasher Baffle Finish	Stealth Metallic	Cable Length	3000mm	SDCM	<1.5, ≤3 (Mini)	Driver Notes	
LED CCT	2700K 3000K 4000K 2700K-6500K (Tunable White)			COI Compliance Model Requirements	4000K	Bluetooth is not compatible with the Mini model.	
Warranty	5 Years						

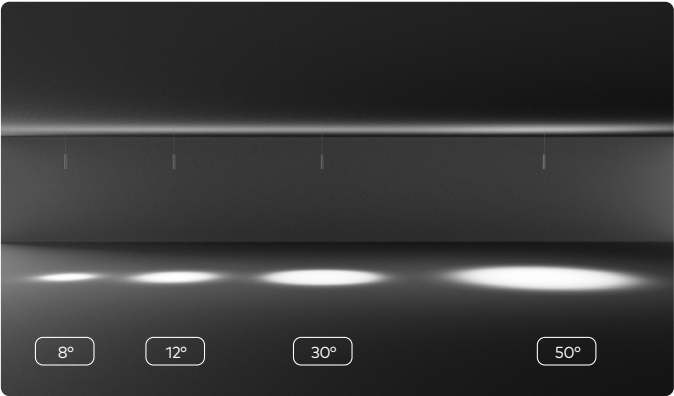

Available Accessories	Notes
Linear Lens (for elliptical beams)	For the most narrow beam options below 22° for each model (6°, 8°, 12°, 22°), an anti-glare louvre is included to aid in beam control and glare.
Honeycomb Lens (for reduced glare)	
Softening Lens (for softening beam edges)	
Rod Suspension Kit (for rod mounted installations)	

