


		LED Power	Lumens (at 3000K)	Beam	Weight
1	Vandal-proof	22W (600mA)	2391lm	30° 50° 70°	1356g
		27W (750mA)	2989lm		
		32W (900mA)	3587lm		

Key Information		Design		Performance		Driver	
Mounting	Ceiling Recessed	Product Family	ION	Lumen Efficacy	Up to 100lm/W	Phase Cut	Remote
Trim Finish	<div><div></div> Textured Black</div> <div><div></div> Textured White</div>	Material	Powder Coated Aluminium	CRI (Ra/R9)	92+ (R9: >50)	DALI	Remote
Baffle Finish	<div><div></div> Matt Black</div>	IP Rating	IP65	UGR (70/50/20)	<13	Bluetooth	Remote
LED CCT	<div><div></div> 2700K</div> <div><div></div> 3000K</div> <div><div></div> 4000K</div> <div><div></div> 2700K-6500K (Tunable White)</div>	IK Rating	IK10	Lifetime (Ta 25°C)	>55,000h L90B10		
Warranty	5 Years	Class Rating	Class II	Operating Ambient Temperature	-10°- 35°C		
		Insulation Rating	CA90	SDCM	<1.5		
				COI Compliance Model Requirements	4000K		



Available Accessories
Seismic Lanyard

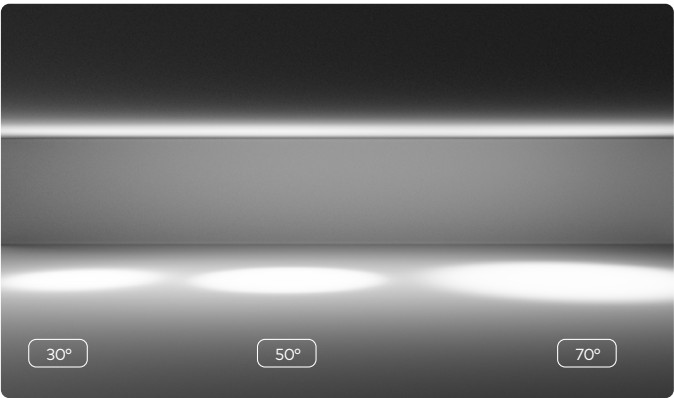