



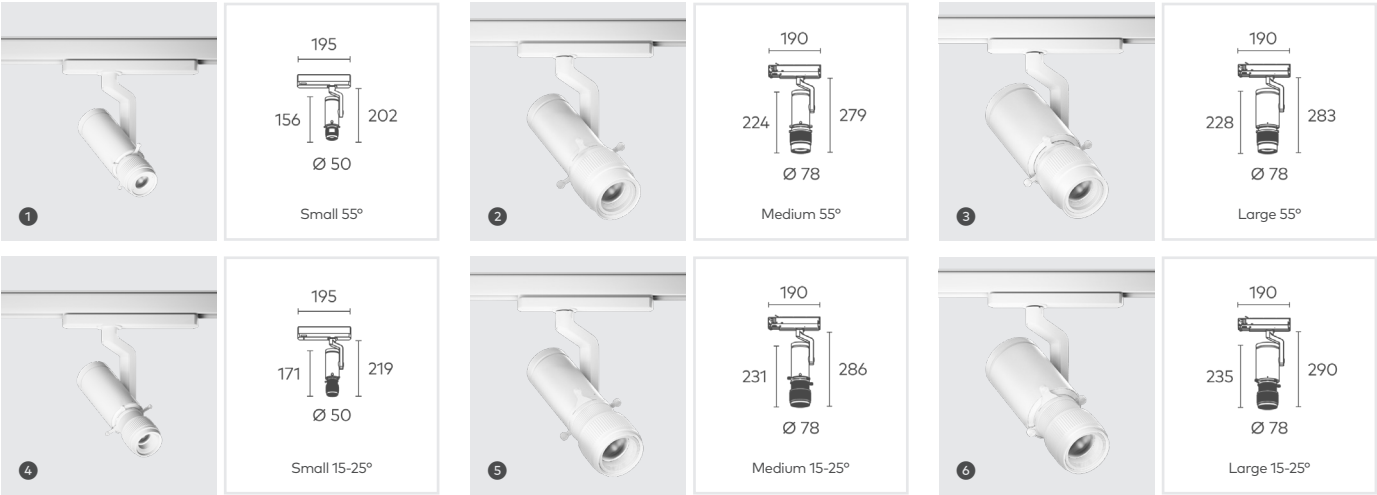

		LED Power	Lumens (at 3000K)	Beam	Weight	Lumen Efficacy
1	Small 55°	8W (200mA)	267lm	55°	650g	Up to 29lm/W
2	Medium 55°	18W (500mA)	842lm	55°	1667g	Up to 39lm/W
3	Large 55°	32W (900mA)	1129lm	55°	1964g	Up to 30lm/W
4	Small 15-25°	8W (200mA)	261lm	15-25°	665g	Up to 28lm/W
5	Medium 15-25°	18W (500mA)	953lm	15-25°	1686g	Up to 44lm/W
6	Large 15-25°	32W (900mA)	1436lm	15-25°	1983g	Up to 38lm/W

Key Information		Design		Performance		Track & Driver Compatibility	
Mounting	Track	Product Family	ION	CRI (Ra/R9)	97+ (R9: >90)	Tempo Dim	MX3 In-Track
Body Finish	 Textured Black  Textured White	Adjustability	120° Tilt, 355° Rotation	UGR (70/50/20)	<10	Phase Cut	MX3 In-Track
LED CCT	 3000K	Material	Powder Coated Aluminium	Lifetime (Ta 25°C)	>72,000h L90B10	DALI	MX5 In-Track
Warranty	5 Years	IP Rating	IP20	Operating Ambient Temperature	-10°- 35°C	Bluetooth	MX3 In-Track, MX5 In-Track
		Class Rating	Class II	SDCM	≤2	Driver Notes	
						Tempo-Dim driver must not be installed on any phase-cut circuit	

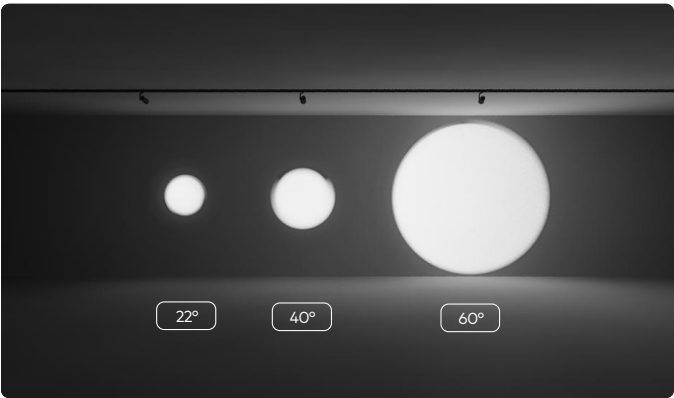

Available Accessories	
Gobo Lens Adaptor	
Customised Colour Dichroic Filter (Enquire for more details)	

