



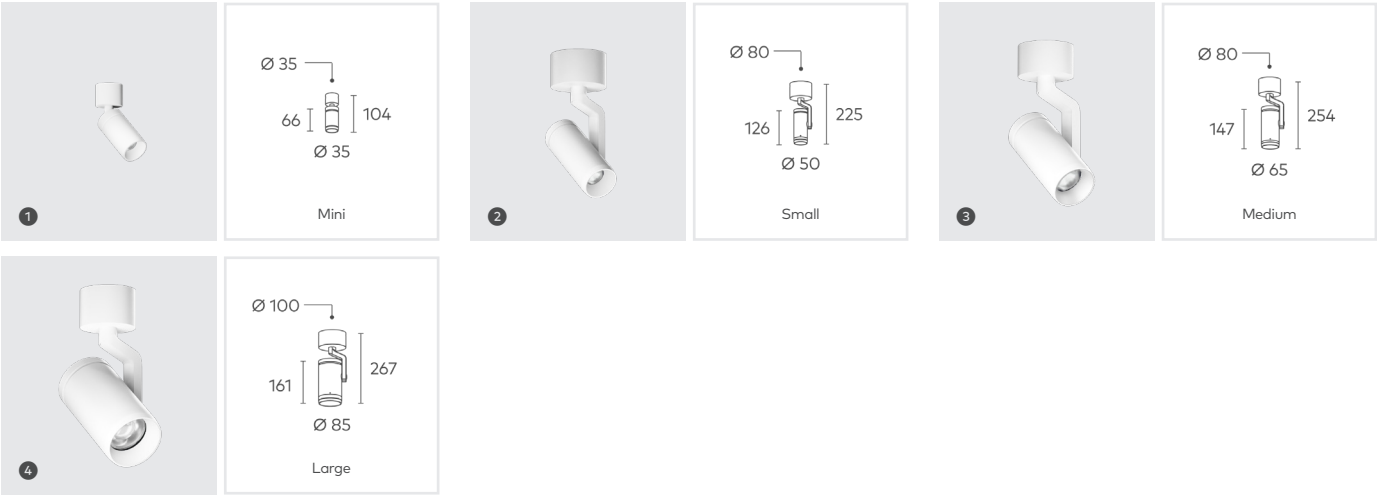

		LED Power	Lumens (at 3000K)	Beam	Beam (Elliptical)	Weight	Lumen Efficacy
1	Mini	3W (1000mA)	206lm	6° 15° 40°	10x60° 15x60° 35x60°	264g	Up to 47lm/W
2	Small	8W (200mA)	607lm	11° 21° 45°	12x55° 20x60° 40x60°	772g	Up to 65lm/W
	Small Wallwasher	8W (200mA)	508lm	40° Asymmetrical	-	772g	Up to 58lm/W
3	Medium	13W (350mA)	1223lm	22° 40° 60°	22x60° 40x70° 50x70°	1006g	Up to 88lm/W
	Medium Wallwasher	13W (350mA)	1046lm	60° Asymmetrical	-	1006g	Up to 71lm/W
		18W (500mA)	1494lm				
4	Large	25W (700mA)	2395lm	30° 45° 70°	30x70° 50x80° 60x80°	1534g	Up to 91lm/W
		32W (900mA)	3079lm				
	Large Wallwasher	25W (700mA)	1790lm	65° Asymmetrical	-	1534g	Up to 64lm/W
		32W (900mA)	2302lm				

Key Information		Design		Performance		Driver	
Mounting	Ceiling Surface	Product Family	ION	CRI (Ra/R9)	92+ (R9: >50)	Phase Cut	Built-in, Mini: Remote
Body Finish	☒ Textured Black ☐ Textured White	Adjustability	120° Tilt, Mini: 90° Tilt, 355° Rotation	UGR (70/50/20)	<13, Mini: <10	DALI	Built-in, Mini: Remote
Baffle Finish	☒ Matt Black ☐ Matt White ☒ Stealth Metallic ☐ Matt Gold	Material	Powder Coated Aluminium	Lifetime (Ta 25°C)	>72,000h L90B10, Mini: >31,000h L90B10	Bluetooth	Remote
Baffle finish not applicable for wallwashers.		IP Rating	IP20	Operating Ambient Temperature	-10°- 35°C	Driver Notes <i>Bluetooth is not compatible with the Mini model.</i>	
LED CCT	☒ 2700K ☐ 3000K ☐ 4000K ☐ 2700K-6500K (Tunable White)	Class Rating	Class I, Mini: Class II	SDCM	≤2, Mini: ≤3		
Warranty	5 Years			COI Compliance Model Requirements	4000K		

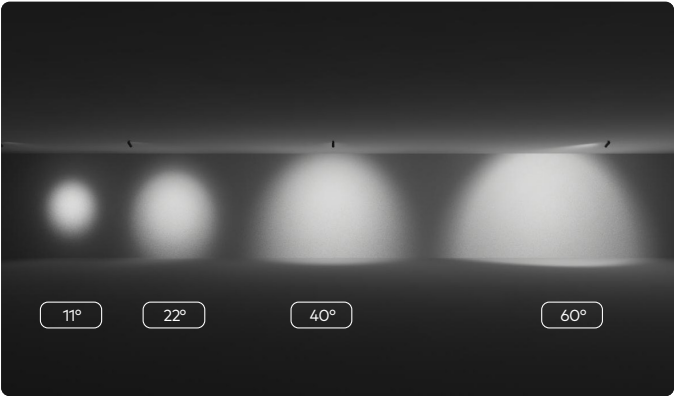

Available Accessories	
Linear Lens	(for elliptical beams)
Honeycomb Lens	(for reduced glare)
Softening Lens	(for softening beam edges)

