


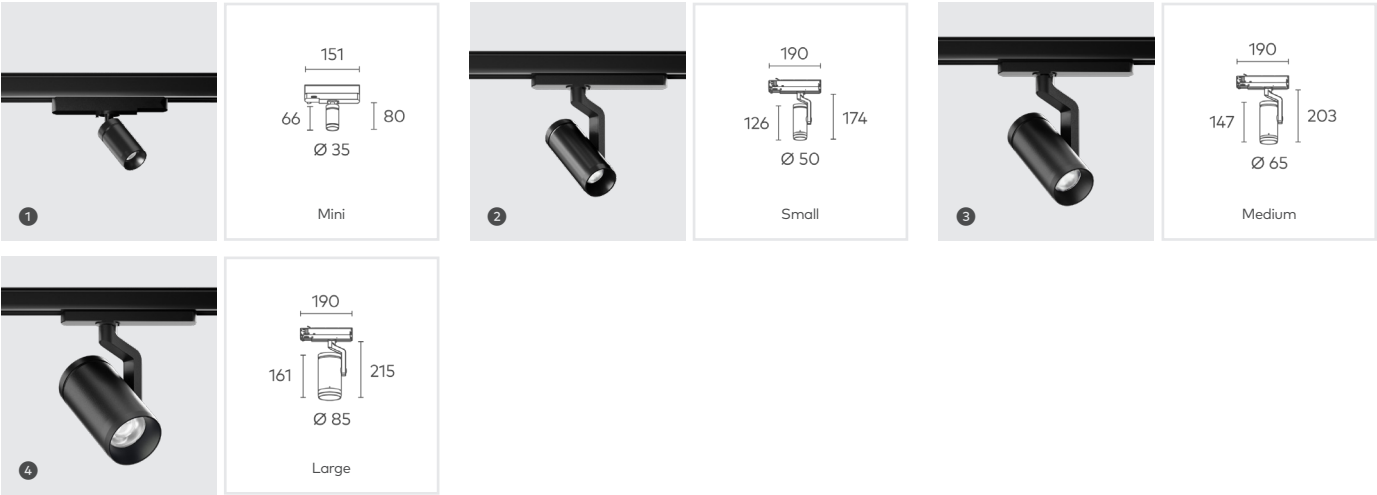


		LED Power	Lumens (at 3000K)	Beam	Beam (Elliptical)	Weight	Lumen Efficacy
1	Mini	3W (1000mA)	206lm	6° 15° 40°	10x60° 15x60° 35x60°	204g	Up to 47lm/W
2	Small	8W (200mA)	607lm	11° 21° 45°	12x55° 20x60° 40x60°	482g	Up to 65lm/W
	Small Wallwasher	8W (200mA)	508lm	40° Asymmetrical	-	482g	Up to 58lm/W
3	Medium	13W (350mA)	1223lm	22° 40° 60°	22x60° 40x70° 50x70°	716g	Up to 88lm/W
	Medium Wallwasher	13W (350mA)	1046lm	60° Asymmetrical	-	716g	Up to 71lm/W
		18W (500mA)	1494lm				
4	Large	25W (700mA)	2395lm	30° 45° 70°	30x70° 50x80° 60x80°	1150g	Up to 91lm/W
		32W (900mA)	3079lm				
	Large Wallwasher	25W (700mA)	1790lm	65° Asymmetrical	-	1150g	Up to 64lm/W
		32W (900mA)	2302lm				

Key Information	
Mounting	Track
Body Finish	☒ Textured Black ☐ Textured White
Baffle Finish*	☒ Matt Black ☐ Matt White ☐ Stealth Metallic ☐ Matt Gold
Baffle finish not applicable for wallwashers.	
LED CCT	☒ 2700K ☐ 3000K ☐ 4000K ☐ 2700K-6500K (Tunable White)
Warranty	5 Years

Design	
Product Family	ION
Adjustability	120° Tilt, Mini: 90° Tilt, 355° Rotation
Material	Powder Coated Aluminium
IP Rating	IP20
Class Rating	Class II

Performance	
CRI (Ra/R9)	92+ (R9: >50)
UGR (70/50/20)	<13, Mini: <10
Lifetime (Ta 25°C)	>72,000h L90B10, Mini: >31,000h L90B10
Operating Ambient Temperature	-10°- 35°C
SDCM	≤2, Mini: ≤3
COI Compliance Model Requirements	4000K

Track & Driver Compatibility	
Tempo Dim	MX3 In-Track
Phase Cut	MX3 In-Track
DALI	MX5 In-Track
Bluetooth	MX3 In-Track, MX5 In-Track
Driver Notes	
The Mini model is only compatible with phase-cut.	

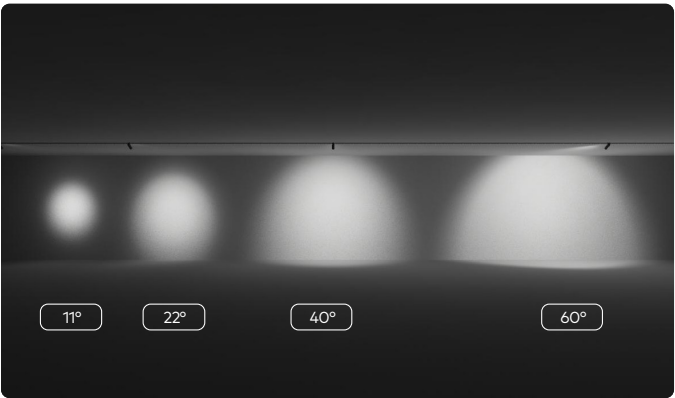

Available Accessories	
Linear Lens (for elliptical beams)	
Honeycomb Lens (for reduced glare)	
Softening Lens (for softening beam edges)	

