


		LED Power	Lumens (at 3000K)	Beam	Weight	Mounting
①	1121mm Direct	25W (700mA)	1895lm	80°	4.6kg	Ceiling Surface, Ceiling Suspended, Track, Wall Surface
	1401mm Direct	31W (900mA)	2368lm		5.8kg	
	1681mm Direct	38W (1050mA)	2842lm		6.9kg	
	1961mm Direct	44W (1200mA)	3315lm		8.1kg	Ceiling Surface, Ceiling Suspended
	2241mm Direct	50W (1400mA)	3789lm		9.2kg	
②	1121mm Direct/Indirect	25W (700mA) ↓ 12.5W (350mA) ↑	1895lm ↓ 1629lm ↑	80° 100°	4.8kg	Ceiling Suspended, Wall Surface
	1401mm Direct/Indirect	31W (900mA) ↓ 15.5W (500mA) ↑	2368lm ↓ 2036lm ↑		6.0kg	
	1681mm Direct/Indirect	38W (1050mA) ↓ 19W (500mA) ↑	2842lm ↓ 2443lm ↑		7.1kg	
	1961mm Direct/Indirect	44W (1200mA) ↓ 22W (600mA) ↑	3315lm ↓ 2850lm ↑		8.3kg	Ceiling Suspended
	2241mm Direct/Indirect	50W (1400mA) ↓ 25W (700mA) ↑	3789lm ↓ 3257lm ↑		9.5kg	
③	L Component Direct (600x600mm)	22W (700mA)	1852lm	80°	2.3kg	Ceiling Surface, Ceiling Suspended
④	L Component Direct/Indirect (600x600mm)	22W (700mA) ↓ 11W (350mA) ↑	1852lm ↓ 1594lm ↑	80° 100°	2.5kg	Ceiling Suspended

Key Information	
Mounting	Ceiling Surface, Ceiling Suspended, Track, Wall Surface
Finish	<ul style="list-style-type: none"> ■ Textured Black ■ Textured White ■ Black/White Trim ■ White/Black Trim
LED CCT	<ul style="list-style-type: none"> ■ 2700K ■ 3000K ■ 4000K ■ 2700K-6500K (Tunable White)
Warranty	5 Years

Design	
Product Family	LX Infinity
Material	Powder Coated Aluminium, PC Trim and PMMA Diffuser
IP Rating	IP40
Class Rating	Class I

Performance	
Lumen Efficacy	Up to 81lm/W
CRI (Ra/R9)	90+ (R9: >50)
UGR (70/50/20)	<10 (Black), <19 (White)
Lifetime (Ta 25°C)	>86,000h L90B10
Operating Ambient Temperature	-10°- 35°C
SDCM	≤3


Driver	
Non-Dim	Built-In
DALI	Built-In (Dual Control DALI for Indirect models)
Bluetooth	Built-In

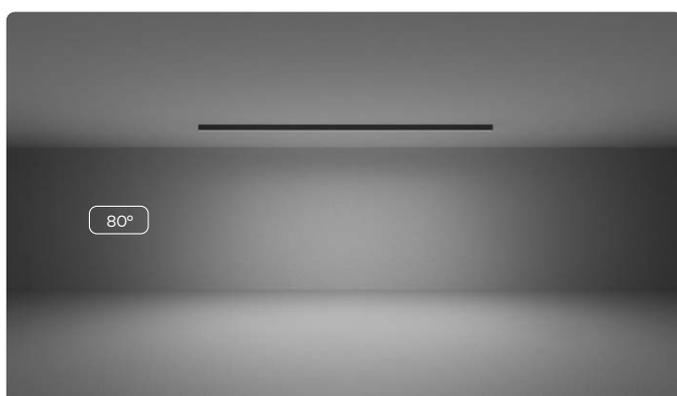

Available Accessories
Rod Suspension Kit
Wire Suspension Kit
Nexus Joiner System
Wall Mount Brackets

Notes
Beam angle and lumen output shown is for white optics, other finishes may vary.
Lower and higher outputs available upon requests.



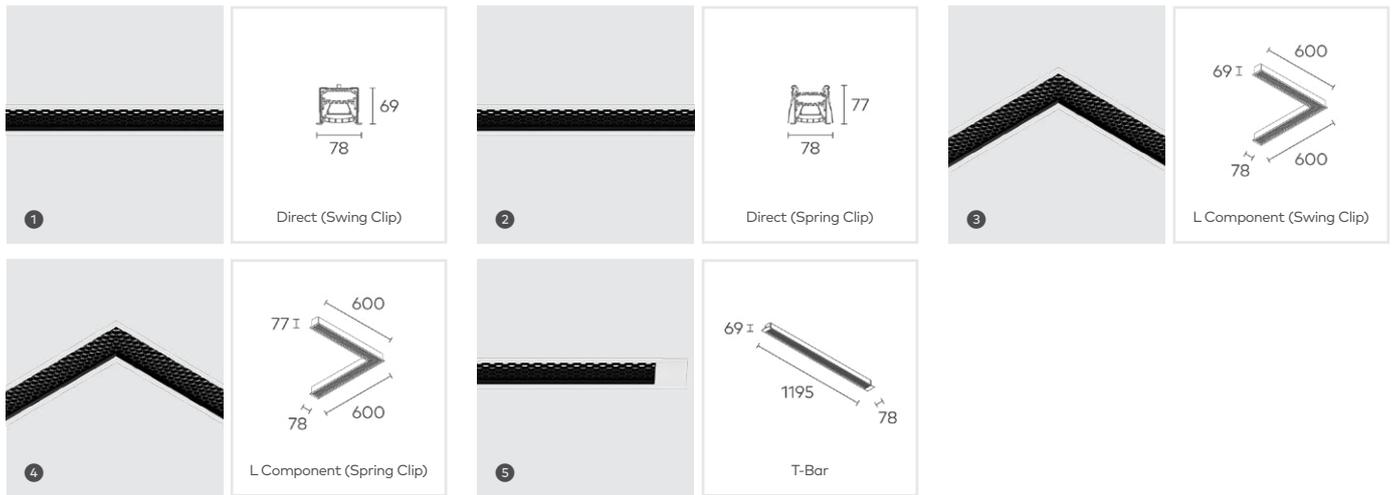


	LED Power	Lumens (at 3000K)	Beam	Weight	
1 2	1121mm	25W (700mA)	1895lm	80°	4.1kg
	1401mm	31W (900mA)	2368lm		5.3kg
	1681mm	38W (1050mA)	2842lm		6.3kg
	1961mm	44W (1200mA)	3315lm		7.6kg
	2241mm	50W (1400mA)	3789lm		8.7kg
3 4	L Component (600x600mm)	22W (700mA)	1852lm	80°	1.8kg
5	T-Bar (1195mm)	25W (700mA)	1895lm	80°	4.1kg

Key Information		
Mounting	Ceiling Recessed	
Finish	<input type="checkbox"/> Textured Black <input type="checkbox"/> Textured White <input type="checkbox"/> Black/White Trim <input type="checkbox"/> White/Black Trim	
	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 2700K-6500K (Tunable White)	
	Warranty	5 Years

Design	
Product Family	LX Infinity
Material	Powder Coated Aluminium, PC Trim and PMMA Diffuser
IP Rating	IP40
Class Rating	Class II
Insulation Rating	IC

Performance	
Lumen Efficacy	Up to 81lm/W
CRI (Ra/R9)	90+ (R9: >50)
UGR (70/50/20)	<10 (Black), <19 (White)
Lifetime (Ta 25°C)	>86,000h L90B10
Operating Ambient Temperature	-10°- 35°C
SDCM	≤3


Driver	
Non-Dim	Remote
DALI	Remote
Bluetooth	Remote
Phase-Cut	Remote

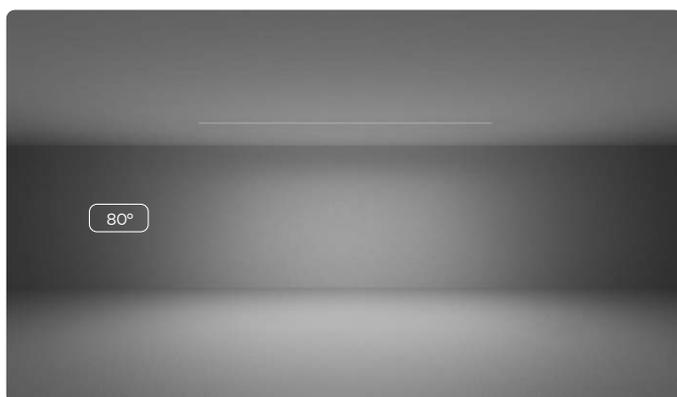

Available Accessories
Nexus Joiner System

Notes
Beam angle and lumen output shown is for white optics, other finishes may vary.
Lower and higher outputs available upon requests.
T-Bar option only available in Textured White



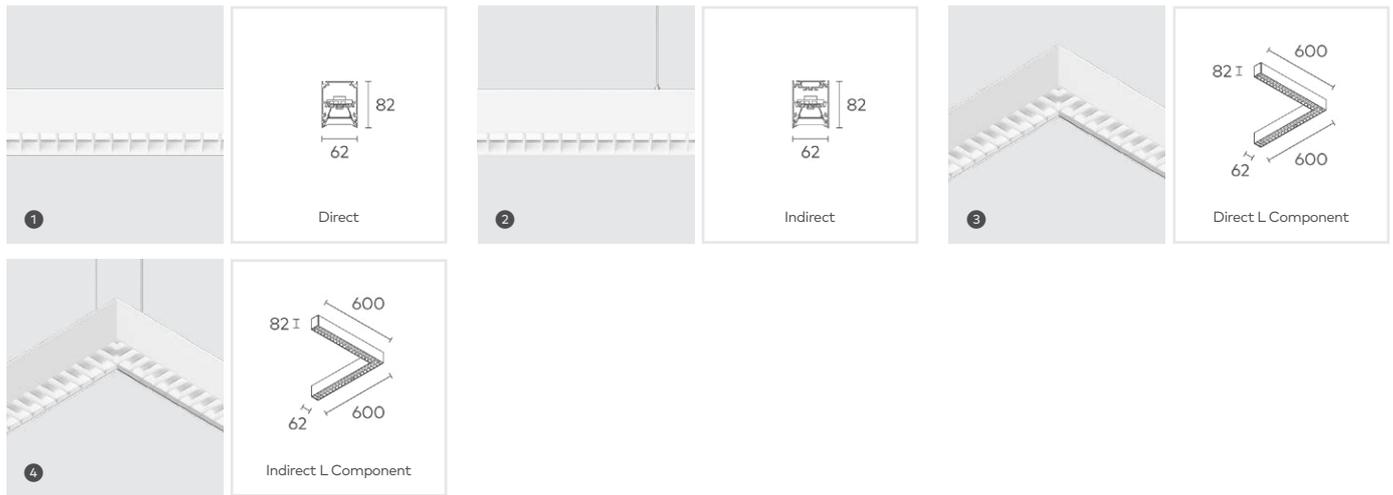

		LED Power	Lumens (at 3000K)	Beam	Weight	Mounting
①	1121mm Direct	25W (700mA)	2423lm	90°	4.6kg	Ceiling Surface, Ceiling Suspended, Track, Wall Surface
	1401mm Direct	31W (900mA)	3028lm		5.8kg	
	1681mm Direct	38W (1050mA)	3634lm		6.9kg	
	1961mm Direct	44W (1200mA)	4239lm		8.1kg	Ceiling Surface, Ceiling Suspended
	2241mm Direct	50W (1400mA)	4844lm		9.2kg	
②	1121mm Direct/Indirect	25W (700mA) ↓ 12.5W (350mA) ↑	2423lm ↓ 1629lm ↑	90° 100°	4.8kg	Ceiling Suspended, Wall Surface
	1401mm Direct/Indirect	31W (900mA) ↓ 15.5W (500mA) ↑	3028lm ↓ 2036lm ↑		6.0kg	
	1681mm Direct/Indirect	38W (1050mA) ↓ 19W (500mA) ↑	3634lm ↓ 2443lm ↑		7.1kg	
	1961mm Direct/Indirect	44W (1200mA) ↓ 22W (600mA) ↑	4239lm ↓ 2850lm ↑		8.3kg	Ceiling Suspended
	2241mm Direct/Indirect	50W (1400mA) ↓ 25W (700mA) ↑	4844lm ↓ 3257lm ↑		9.5kg	
③	L Component Direct (600x600mm)	22W (700mA)	2370lm	90°	2.3kg	Ceiling Surface, Ceiling Suspended
④	L Component Direct/Indirect (600x600mm)	22W (700mA) ↓ 11W (350mA) ↑	2370lm ↓ 1594lm ↑	90° 100°	2.5kg	Ceiling Suspended

Key Information	
Mounting	Ceiling Surface, Ceiling Suspended, Track, Wall Surface
Finish	<input type="checkbox"/> Textured Black <input type="checkbox"/> Textured White <input type="checkbox"/> Black/White Trim <input type="checkbox"/> White/Black Trim
LED CCT	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 2700K-6500K (Tunable White)
Warranty	5 Years

Design	
Product Family	LX Infinity
Material	Powder Coated Aluminium, PC Trim and PMMA Diffuser
IP Rating	IP40
Class Rating	Class I

Performance	
Lumen Efficacy	Up to 104lm/W
CRI (Ra/R9)	90+ (R9: >50)
UGR (70/50/20)	<10 (Black), <19 (White)
Lifetime (Ta 25°C)	>86,000h L90B10
Operating Ambient Temperature	-10°- 35°C
SDCM	≤3


Driver	
Non-Dim	Built-In
DALI	Built-In (Dual Control DALI for Indirect models)
Bluetooth	Built-In



Available Accessories
Rod Suspension Kit
Wire Suspension Kit
Nexus Joiner System
Wall Mount Brackets

Notes
Beam angle and lumen output shown is for white optics, other finishes may vary.
Lower and higher outputs available upon requests.



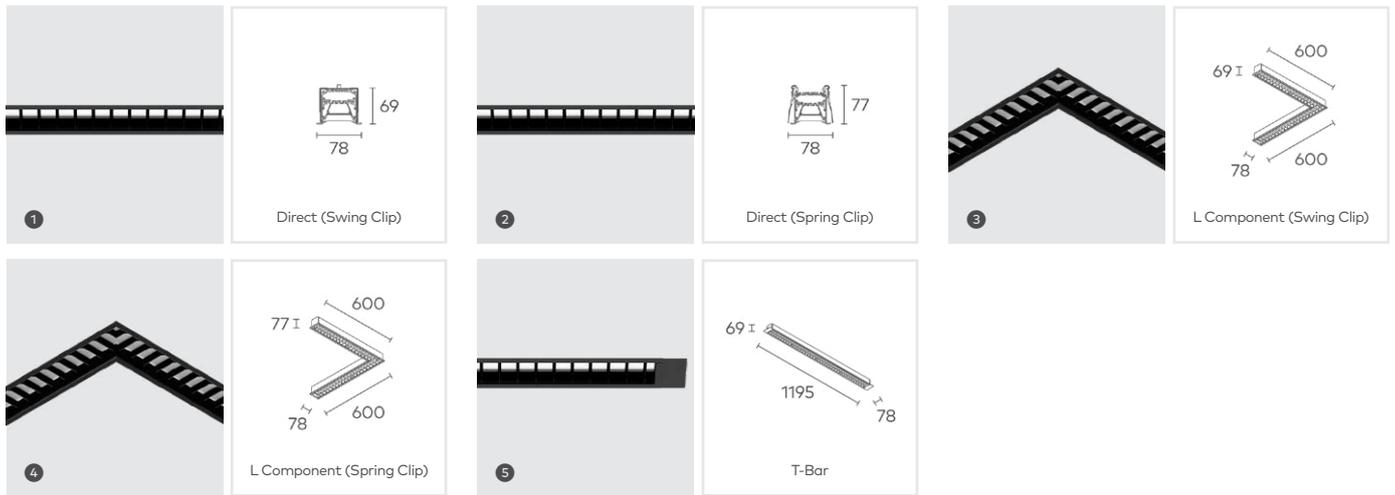


	LED Power	Lumens (at 3000K)	Beam	Weight	
1 2	1121mm	25W (700mA)	2423lm	90°	4.1kg
	1401mm	31W (900mA)	3028lm		5.3kg
	1681mm	38W (1050mA)	3634lm		6.3kg
	1961mm	44W (1200mA)	4239lm		7.6kg
	2241mm	50W (1400mA)	4844lm		8.7kg
3 4	L Component (600x600mm)	22W (700mA)	2370lm	90°	1.8kg
5	T-Bar (1195mm)	25W (700mA)	2423lm	90°	4.1kg

Key Information		
Mounting	Ceiling Recessed	
Finish	<input type="checkbox"/> Textured Black <input type="checkbox"/> Textured White <input type="checkbox"/> Black/White Trim <input type="checkbox"/> White/Black Trim	
	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 2700K-6500K (Tunable White)	
	Warranty	5 Years

Design	
Product Family	LX Infinity
Material	Powder Coated Aluminium, PC Trim and PMMA Diffuser
IP Rating	IP40
Class Rating	Class II
Insulation Rating	IC

Performance	
Lumen Efficacy	Up to 104lm/W
CRI (Ra/R9)	90+ (R9: >50)
UGR (70/50/20)	<10 (Black), <19 (White)
Lifetime (Ta 25°C)	>86,000h L90B10
Operating Ambient Temperature	-10°- 35°C
SDCM	≤3


Driver	
Non-Dim	Remote
DALI	Remote
Bluetooth	Remote
Phase-Cut	Remote

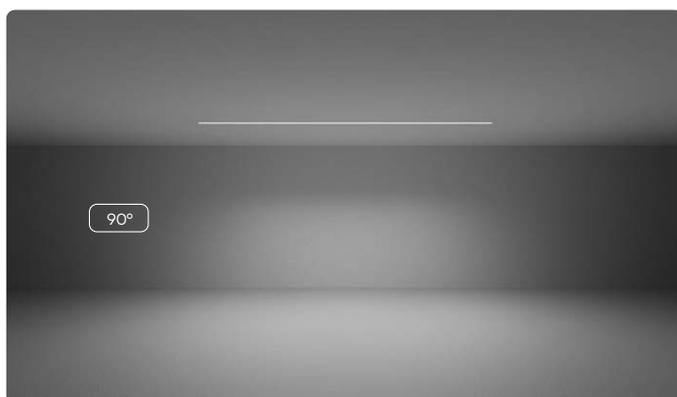

Available Accessories
Nexus Joiner System

Notes
Beam angle and lumen output shown is for white optics, other finishes may vary.
Lower and higher outputs available upon requests.
T-Bar option only available in Textured White



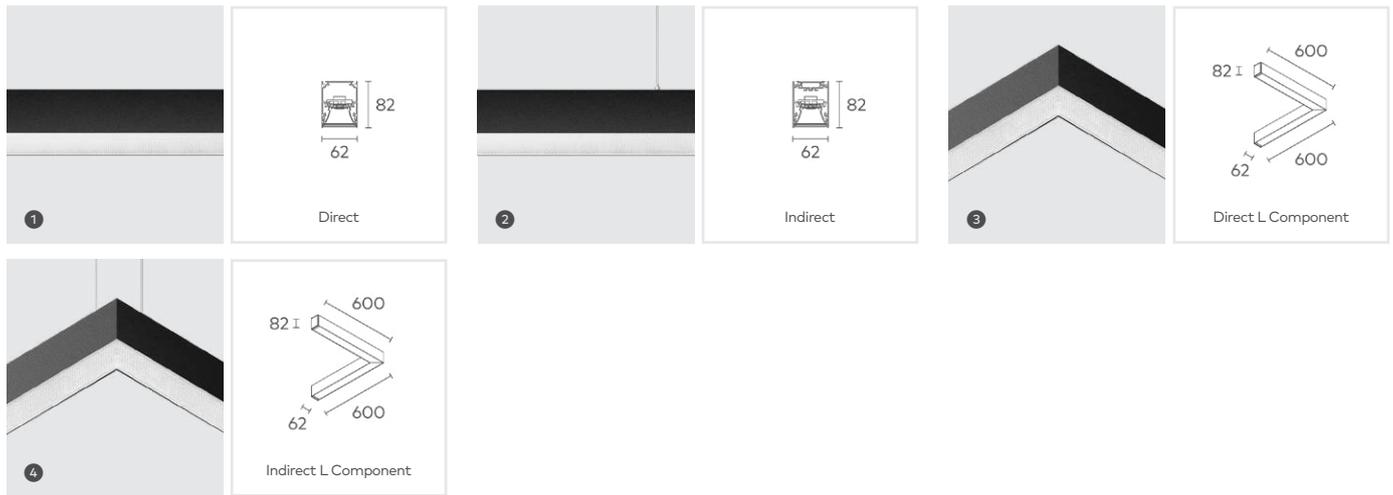

		LED Power	Lumens (at 3000K)	Beam	Weight	Mounting
1	1121mm Direct	25W (700mA)	2548lm	90°	4.6kg	Ceiling Surface, Ceiling Suspended, Track, Wall Surface
	1401mm Direct	31W (900mA)	3184lm		5.8kg	
	1681mm Direct	38W (1050mA)	3821lm		6.9kg	
	1961mm Direct	44W (1200mA)	4457lm		8.1kg	Ceiling Surface, Ceiling Suspended
	2241mm Direct	50W (1400mA)	5094lm		9.2kg	
2	1121mm Direct/Indirect	25W (700mA) ↓ 12.5W (350mA) ↑	2548lm ↓ 1629lm ↑	90° 100°	4.8kg	Ceiling Suspended, Wall Surface
	1401mm Direct/Indirect	31W (900mA) ↓ 15.5W (500mA) ↑	3184m ↓ 2036lm ↑		6.0kg	
	1681mm Direct/Indirect	38W (1050mA) ↓ 19W (500mA) ↑	3821lm ↓ 2443lm ↑		7.1kg	
	1961mm Direct/Indirect	44W (1200mA) ↓ 22W (600mA) ↑	4457lm ↓ 2850lm ↑		8.3kg	Ceiling Suspended
	2241mm Direct/Indirect	50W (1400mA) ↓ 25W (700mA) ↑	5094lm ↓ 3257lm ↑		9.5kg	
3	L Component Direct (600x600mm)	22W (700mA)	2492lm	90°	2.3kg	Ceiling Surface, Ceiling Suspended
4	L Component Direct/Indirect (600x600mm)	22W (700mA) ↓ 11W (350mA) ↑	2492lm ↓ 1594lm ↑	90° 100°	2.5kg	Ceiling Suspended

Key Information	
Mounting	Ceiling Surface, Ceiling Suspended, Track, Wall Surface
Finish	<input checked="" type="checkbox"/> Textured Black <input type="checkbox"/> Textured White
LED CCT	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 2700K-6500K (Tunable White)
Warranty	5 Years

Design	
Product Family	LX Infinity
Material	Powder Coated Aluminium, PMMA Diffuser
IP Rating	IP40
Class Rating	Class I

Performance	
Lumen Efficacy	Up to 110lm/W
CRI (Ra/R9)	90+ (R9: >50)
UGR (70/50/20)	<19
Lifetime (Ta 25°C)	>86,000h L90B10
Operating Ambient Temperature	-10°- 35°C
SDCM	≤3

Driver	
Non-Dim	Built-In
DALI	Built-In (Dual Control DALI for Indirect models)
Bluetooth	Built-In



Available Accessories
Rod Suspension Kit
Wire Suspension Kit
Nexus Joiner System
Wall Mount Brackets


Notes
Lower and higher outputs available upon requests.





	LED Power	Lumens (at 3000K)	Beam	Weight	
1 2	1121mm	25W (700mA)	2548lm	90°	4.1kg
	1401mm	31W (900mA)	3184lm		5.3kg
	1681mm	38W (1050mA)	3821lm		6.3kg
	1961mm	44W (1200mA)	4457lm		7.6kg
	2241mm	50W (1400mA)	5094lm		8.7kg
3 4	L Component (600x600mm)	22W (700mA)	2492lm	90°	1.8kg
5	T-Bar (1195mm)	25W (700mA)	2548lm	90°	4.1kg

Key Information		Design		Performance		Driver	
Mounting	Ceiling Recessed	Product Family	LX Infinity	Lumen Efficacy	Up to 110lm/W	Non-Dim	Remote
Finish	<input type="checkbox"/> Textured Black <input type="checkbox"/> Textured White	Material	Powder Coated Aluminium, PMMA Diffuser	CRI (Ra/R9)	90+ (R9: >50)	DALI	Remote
LED CCT	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 2700K-6500K (Tunable White)	IP Rating	Swing Clip: IP40 Spring Clip: IP40, IP54 T-Bar: IP40	UGR (70/50/20)	<19	Bluetooth	Remote
Warranty	5 Years	Class Rating	Class II	Lifetime (Ta 25°C)	>86,000h L90B10	Phase-Cut	Remote
		Insulation Rating	IC	Operating Ambient Temperature	-10°- 35°C		
				SDCM	≤3		

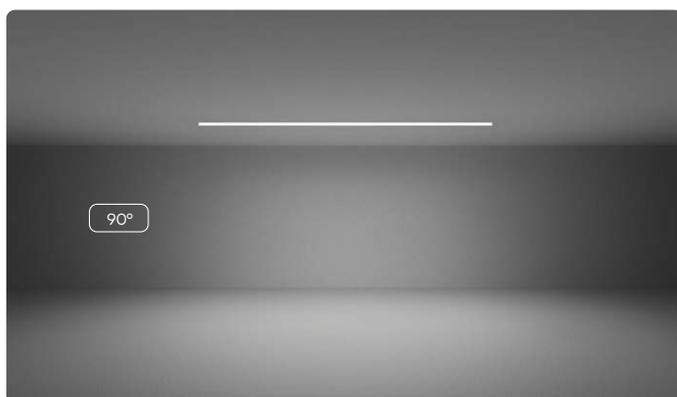

Available Accessories	Notes
Nexus Joiner System	Lower and higher outputs available upon requests. IP54 option only available in Spring Clip models at standalone lengths. T-Bar option only available in Textured White

