

The image features eight Unios EQ lighting fixtures arranged on a solid purple background. The fixtures are shown from various angles, highlighting their design details. They include a black adjustable spotlight, a black and white adjustable spotlight, a black and white adjustable spotlight with a textured lens, a black adjustable spotlight with a textured lens, a black adjustable spotlight with a textured lens, a black adjustable spotlight with a textured lens, a black adjustable spotlight with a textured lens, and a black adjustable spotlight with a textured lens. The fixtures are arranged in a circular pattern around the central text.


unios®

EQ

Perfecting the essentials – classic Unios design, pro-grade performance, simplified options and a compact price to match.

Lighting with Intention

Explore new lighting possibilities when you let each EQ work to complement each other and create atmosphere.

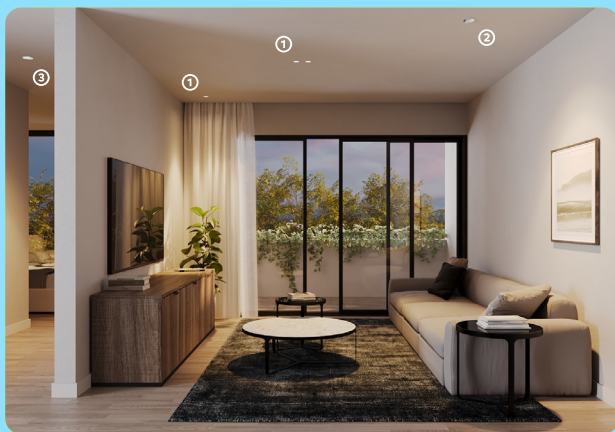

①

EQ Comfort 60 Downlight

In pairs, the EQ Comfort 60 bring comfortable, general lighting to the living area.

②

EQ Tilt Downlight

Lighting the verticals and highlighting artwork.

③

EQ Comfort 100 Downlight

Providing functional and comfortable illumination along the hallway.

EQ Comfort

With two sizes, the EQ Comfort ensures visual comfort even when performing at high output.



EQ Comfort 60

Ø60mm x H65mm (Cutout: Ø54mm)
8W • 659lm (at 3000K) • 50° Beam
LED Lifetime: >39,000h L90B10
Colour Deviation: SDCM≤2

EQ Comfort 100

Ø105mm x H85mm (Cutout: Ø92mm)
10W • 804lm (at 3000K) • 60° Beam
LED Lifetime: >59,000h L70B10
Colour Deviation: SDCM≤3

Finish

● Textured Black ○ Textured White

CCT

● 3000K ● 4000K

UGR: <19 • IP Rating: IP44 • 5 Year Warranty • CRI: 90+ (R9>50)
Dimming: LED Phase-Cut Dimmer, Trailing Edge

EQ Tilt

Tiltable at up to 20°, the EQ Tilt is designed to put your prized possessions in focus.



Ø104mm x H63mm (Cutout: Ø95mm)
10W • 767lm (at 3000K) • 60° Beam
LED Lifetime: >59,000h L70B10
Colour Deviation: SDCM≤3

Finish

● Textured Black ○ Textured White

CCT

● 3000K ● 4000K

UGR: <19 • IP Rating: IP44 • 5 Year Warranty • CRI: 90+ (R9>50)
Dimming: LED Phase-Cut Dimmer, Trailing Edge • Tilt: 20°

EQ Essential

Thanks to its heatsink design, the EQ Essential is ideal for spaces with limited ceiling clearance.



Ø105mm x H56mm (Cutout: Ø92mm)
10W • 853lm (at 3000K) • 60° Beam
LED Lifetime: >59,000h L70B10
Colour Deviation: SDCM≤3

Finish

● Textured Black ○ Textured White

CCT

● 3000K ● 4000K

UGR: <19 • IP Rating: IP44 • 5 Year Warranty • CRI: 90+ (R9>50)
Dimming: LED Phase-Cut Dimmer, Trailing Edge

EQ Series

Unremarkably Brilliant



unios.com/eqessential



unios.com/eqtilt



unios.com/eqcomfort

Visit the Unios Toolbox links for
complete product specifications.