


		LED Power	Lumens (at 3000K)	Beam	Weight
1	EQ Essential	10W (250mA)	853lm	60°	350g


Key Information		Design		Performance		Driver	
Mounting	Ceiling Recessed	Product Family	EQ	Lumen Efficacy	Up to 92lm/W	Phase Cut	Remote
Finish	<div><div></div> Textured Black</div> <div><div></div> Textured White</div>	Material	Powder Coated Aluminium	CRI (Ra/R9)	90+ (R9: >50)	DALI	Remote
LED CCT	<div><div></div> 3000K</div> <div><div></div> 4000K</div>	IP Rating	IP44 (Room Side)	UGR (70/50/20)	<19	Bluetooth	Remote
Warranty	5 Years	Class Rating	Class II	Lifetime (Ta 25°C)	>59,000h L70B10		
		Insulation Rating	IC-4	Operating Ambient Temperature	-10°- 35°C		
				SDCM	≤3		
				COI Compliance Model Requirements	4000K		



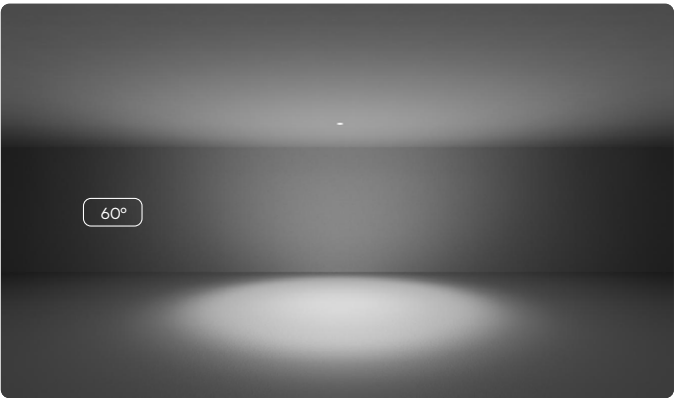

		LED Power	Lumens (3000K)	Beam	Weight	Lifetime (Ta 25°C)	SDCM
1	EQ Comfort 60	8W (200mA)	659lm	50°	104g	>39,000h L90B10	≤2
2	EQ Comfort 100	10W (250mA)	804lm	60°	350g	>59,000h L70B10	≤3

Key Information		Design		Performance		Driver	
Mounting	Ceiling Recessed	Product Family	EQ	Lumen Efficacy	Up to 86lm/W	Phase Cut	Remote
Finish	<div> <div></div> Textured Black <div></div> Textured White </div>	Material	Powder Coated Aluminium	CRI (Ra/R9)	90+ (R9: >50)	DALI	Remote
LED CCT	<div> <div></div> 3000K <div></div> 4000K </div>	IP Rating	IP44 (Room Side)	UGR (70/50/20)	<16	Bluetooth	Remote
Warranty	5 Years	Class Rating	Class II	Operating Ambient Temperature	-10°- 35°C		
		Insulation Rating	IC-4	COI Compliance Model Requirements	4000K		

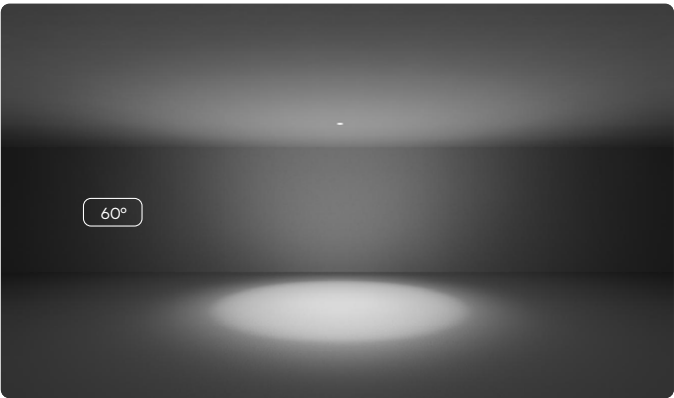



		LED Power	Lumens (at 3000K)	Beam	Weight
1	EQ Tilt	10W (250mA)	767lm	60°	350g

Key Information		Design		Performance		Driver	
Mounting	Ceiling Recessed	Product Family	EQ	Lumen Efficacy	Up to 84lm/W	Phase Cut	Remote
Finish	<div><div></div> Textured Black</div> <div><div></div> Textured White</div>	Adjustability	20° Tilt	CRI (Ra/R9)	90+ (R9: >50)	DALI	Remote
LED CCT	<div><div></div> 3000K</div> <div><div></div> 4000K</div>	Material	Powder Coated Aluminium	UGR (70/50/20)	<19	Bluetooth	Remote
Warranty	5 Years	IP Rating	IP44 (Room Side)	Lifetime (Ta 25°C)	>59,000h L70B10		
		Class Rating	Class II	Operating Ambient Temperature	-10°- 35°C		
		Insulation Rating	IC-4	SDCM	≤3		
				COI Compliance Model Requirements	4000K		

