


Luminaire




Accessories

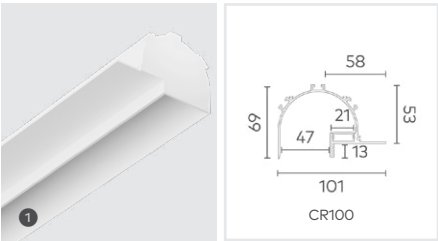

	LED Power	Lumens	Beam	SDCM	Maximum Single Length Run	Cut Increments
1 Single CCT	5W/m (24V DC)	127lm/m at 3000K	110°	≤1	20m	6.25mm
	10W/m (24V DC)	254lm/m at 3000K			10m	
	15W/m (24V DC)	380lm/m at 3000K			6.5m	
	20W/m (24V DC)	507lm/m at 3000K			5m	
Tunable White (2700K - 6500K)	5W/m (24V DC)	117lm/m at 2700K	110°	≤1	5m	11mm
	10W/m (24V DC)	233lm/m at 2700K				
	15W/m (24V DC)	350lm/m at 2700K				
	20W/m (24V DC)	467lm/m at 2700K				
RGB	10W/m (24V DC)	82lm/m	110°	N/A	5m	50mm
	15W/m (24V DC)	123lm/m				
	20W/m (24V DC)	164lm/m				
	15W/m (24V DC)	166lm/m at 3000K	110°	≤2 (3000K)	5m	50mm
RGBW(W at 3000K)	20W/m (24V DC)	221lm/m at 3000K				

Key Information		Design		Performance		Driver	
Mounting	Recessed	Product Family	Inter	Lumen Efficacy	Up to 26lm/W	Non-Dim	Remote
Finish	<input type="checkbox"/> Textured White	Material	Powdercoated Aluminum, PC Diffuser	CRI (Ra/R9, Single CCT)	95+ (R9: >90)	Phase Cut	Remote
LED CCT	<input type="checkbox"/> 2700K	IP Rating	IP20	Lifetime (Ta 25°C)	>50,000h L90B10	DALI	Remote
	<input type="checkbox"/> 3000K	Class Rating	Class III	Operating Ambient Temperature	-10°- 35°C	Bluetooth	Remote
	<input type="checkbox"/> 4000K	Maximum Supply Length	3 metres				
	<input type="checkbox"/> 2700K-6500K (Tunable White)	Strip Compatibility	Inter IN10 Strip Light				
Diffuser	Opal Diffuser						
Warranty	5 Years						

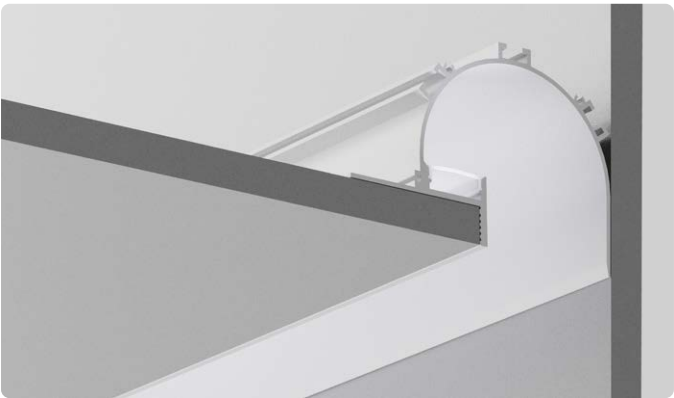

Available Accessories
CR100 End Cap (Allow 2mm length clearance per end cap)
CR100 Mounting Kit

