


Luminaire



Accessories

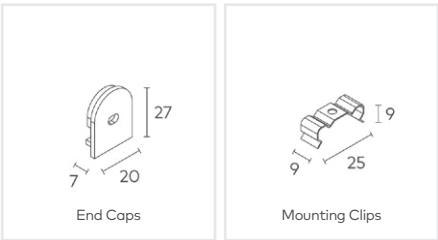

	LED Power	Lumens (3000K)	Beam	SDCM	Maximum Single Length Run	Cut Increments
1 Single CCT	5W/m (24V DC)	493lm/m at 3000K	130°	≤1	20m	6.25mm
	10W/m (24V DC)	987lm/m at 3000K			10m	
	15W/m (24V DC)	1480lm/m at 3000K			6.5m	
	20W/m (24V DC)	1973lm/m at 3000K			5m	
Tunable White (2700K - 6500K)	5W/m (24V DC)	454lm/m at 2700K	130°	≤1	5m	11mm
	10W/m (24V DC)	908lm/m at 2700K				
	15W/m (24V DC)	1362lm/m at 2700K				
	20W/m (24V DC)	1816lm/m at 2700K				
RGB	10W/m (24V DC)	318lm/m	130°	N/A	5m	50mm
	15W/m (24V DC)	478lm/m				
	20W/m (24V DC)	637lm/m				
RGBW(W at 3000K)	15W/m (24V DC)	644lm/m at 3000K	130°	≤2 (3000K)	5m	50mm
	20W/m (24V DC)	859lm/m at 3000K				

Key Information	
Mounting	Surface
Finish	Aluminium
LED CCT	2700K
	3000K
	4000K
	2700K-6500K (Tunable White)
	RGB
	RGBW
Diffuser	Opal Diffuser
Warranty	5 Years

Design	
Product Family	Inter
Material	Anodised Aluminium, PC Diffuser
IP Rating	IP20
Class Rating	Class III
Maximum Supply Length	3 metres
Strip Compatibility	Inter IN10 Strip Light

Performance	
Lumen Efficacy	Up to 100lm/W
CRI (Ra/R9, Single CCT)	95+ (R9: >90)
Lifetime (Ta 25°C)	>50,000h L90B10
Operating Ambient Temperature	-10°- 35°C


Driver	
Non-Dim	Remote
Phase Cut	Remote
DALI	Remote
Bluetooth	Remote




Available Accessories
DRS20 End Cap (Allow 2mm length clearance per end cap)
DRS20 Mounting Clip (Allow 2mm width clearance for mounting clips)



Luminaire

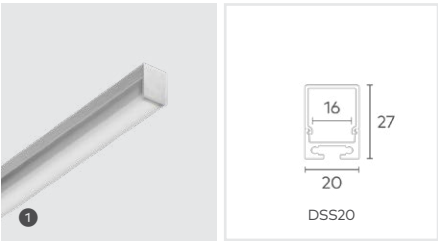

Accessories

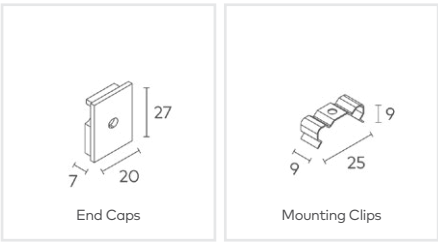

	LED Power	Lumens (3000K)	Beam	SDCM	Maximum Single Length Run	Cut Increments
1 Single CCT	5W/m (24V DC)	493lm/m at 3000K	130°	≤1	20m	6.25mm
	10W/m (24V DC)	987lm/m at 3000K			10m	
	15W/m (24V DC)	1480lm/m at 3000K			6.5m	
	20W/m (24V DC)	1973lm/m at 3000K			5m	
Tunable White (2700K - 6500K)	5W/m (24V DC)	454lm/m at 2700K	130°	≤1	5m	11mm
	10W/m (24V DC)	908lm/m at 2700K				
	15W/m (24V DC)	1362lm/m at 2700K				
	20W/m (24V DC)	1816lm/m at 2700K				
RGB	10W/m (24V DC)	318lm/m	130°	N/A	5m	50mm
	15W/m (24V DC)	478lm/m				
	20W/m (24V DC)	637lm/m				
RGBW(W at 3000K)	15W/m (24V DC)	644lm/m at 3000K	130°	≤2 (3000K)	5m	50mm
	20W/m (24V DC)	859lm/m at 3000K				

Key Information		Design		Performance		Driver	
Mounting	Surface	Product Family	Inter	Lumen Efficacy	Up to 100lm/W	Non-Dim	Remote
Finish	Aluminium	Material	Anodised Aluminum, PC Diffuser	CRI (Ra/R9, Single CCT)	95+ (R9: >90)	Phase Cut	Remote
LED CCT	2700K	IP Rating	IP20	Lifetime (Ta 25°C)	>50,000h L90B10	DALI	Remote
	3000K	Class Rating	Class III	Operating Ambient Temperature	-10°- 35°C	Bluetooth	Remote
	4000K	Maximum Supply Length	3 metres				
	2700K-6500K (Tunable White)	Strip Compatibility	Inter IN10 Strip Light				
Diffuser	Opal Diffuser						
Warranty	5 Years						



Available Accessories
DSS20 End Cap (Allow 2mm length clearance per end cap)
DSS20 Mounting Clip (Allow 2mm width clearance for mounting clips)

