


Luminaire



Accessories

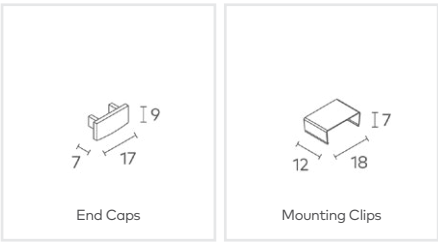

	LED Power	Lumens (3000K)	Beam	SDCM	Maximum Single Length Run	Cut Increments
1 Single CCT	5W/m (24V DC)	424lm/m at 3000K	110°	≤1	20m	6.25mm
	10W/m (24V DC)	847lm/m at 3000K			10m	
	15W/m (24V DC)	1271lm/m at 3000K			6.5m	
	20W/m (24V DC)	1694lm/m at 3000K			5m	
Tunable White (2700K - 6500K)	5W/m (24V DC)	390lm/m at 2700K	110°	≤1	5m	11mm
	10W/m (24V DC)	780lm/m at 2700K				
	15W/m (24V DC)	1169lm/m at 2700K				
	20W/m (24V DC)	1559lm/m at 2700K				
RGB	10W/m (24V DC)	273lm/m	110°	N/A	5m	50mm
	15W/m (24V DC)	410lm/m				
	20W/m (24V DC)	547lm/m				
RGBW(W at 3000K)	15W/m (24V DC)	553lm/m at 3000K	110°	≤2 (3000K)	5m	50mm
	20W/m (24V DC)	738lm/m at 3000K				

Key Information	
Mounting	Recessed
Finish	Aluminium
LED CCT	2700K
	3000K
	4000K
	2700K-6500K (Tunable White)
	RGB
	RGBW
Diffuser	Opal Diffuser
Warranty	5 Years

Design	
Product Family	Inter
Material	Anodised Aluminum, PC Diffuser
IP Rating	IP20
Class Rating	Class III
Maximum Supply Length	3 metres
Strip Compatibility	Inter IN10 Strip Light

Performance	
Lumen Efficacy	Up to 86lm/W
CRI (Ra/R9, Single CCT)	95+ (R9: >90)
Lifetime (Ta 25°C)	>50,000h L90B10
Operating Ambient Temperature	-10°- 35°C

Driver	
Non-Dim	Remote
Phase Cut	Remote
DALI	Remote
Bluetooth	Remote




Available Accessories
FS17 End Cap (Allow 2mm length clearance per end cap)
FS17 Mounting Clip (Allow 2mm width clearance for mounting clips)



Luminaire



Accessories

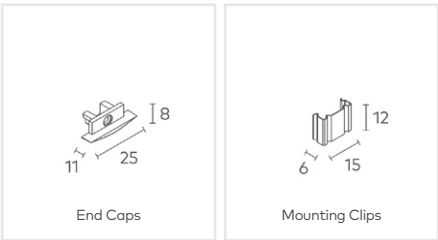

	LED Power	Lumens (3000K)	Beam	SDCM	Maximum Single Length Run	Cut Increments
1 Single CCT	5W/m (24V DC)	424lm/m at 3000K	110°	≤1	20m	6.25mm
	10W/m (24V DC)	847lm/m at 3000K			10m	
	15W/m (24V DC)	1271lm/m at 3000K			6.5m	
	20W/m (24V DC)	1694lm/m at 3000K			5m	
Tunable White (2700K - 6500K)	5W/m (24V DC)	390lm/m at 2700K	110°	≤1	5m	11mm
	10W/m (24V DC)	780lm/m at 2700K				
	15W/m (24V DC)	1169lm/m at 2700K				
	20W/m (24V DC)	1559lm/m at 2700K				
RGB	10W/m (24V DC)	273lm/m	110°	N/A	5m	50mm
	15W/m (24V DC)	410lm/m				
	20W/m (24V DC)	547lm/m				
RGBW(W at 3000K)	15W/m (24V DC)	553lm/m at 3000K	110°	≤2 (3000K)	5m	50mm
	20W/m (24V DC)	738lm/m at 3000K				

Key Information	
Mounting	Recessed
Finish	Aluminium
LED CCT	2700K
	3000K
	4000K
	2700K-6500K (Tunable White)
	RGB
	RGBW
Diffuser	Opal Diffuser
Warranty	5 Years

Design	
Product Family	Inter
Material	Anodised Aluminum, PC Diffuser
IP Rating	IP20
Class Rating	Class III
Maximum Supply Length	3 metres
Strip Compatibility	Inter IN10 Strip Light

Performance	
Lumen Efficacy	Up to 86lm/W
CRI (Ra/R9, Single CCT)	95+ (R9: >90)
Lifetime (Ta 25°C)	>50,000h L90B10
Operating Ambient Temperature	-10°- 35°C

Driver	
Non-Dim	Remote
Phase Cut	Remote
DALI	Remote
Bluetooth	Remote



Available Accessories
FR25 End Cap (Allow 2mm length clearance per end cap)
FR25 Mounting Clip (Allow 2mm width clearance for mounting clips)

