

Luminaire



Accessories



		LED Power	Lumens	Beam	SDCM	Maximum Single Length Run	Cut Increments
1	Single CCT	10W/m (24V DC)	547lm/m at 3000K	110°	≤1	10m	6.25mm
	Tunable White (2700K - 6500K)	10W/m (24V DC)	378lm/m at 2700K	110°	≤2	5m	50mm
	RGB	10W/m (24V DC)	241lm/m	110°	N/A	5m	50mm

Key Information	
Mounting	Surface, Recessed
Finish	Aluminium Textured Black
LED CCT	2700K 3000K 4000K 2700K-6500K (Tunable White) RGB RGBW
Diffuser	Opal Diffuser
Warranty	5 Years

Design	
Product Family	Inter
Material	Powdercoated Aluminum, PC Diffuser
IP Rating	IP20
Class Rating	Class III
Maximum Supply Length	3 metres
Strip Compatibility	Inter IN5 Strip Light

Performance	
Lumen Efficacy	Up to 56lm/W
CRI (Ra/R9, Single CCT)	95+ (R9: >90)
Lifetime (Ta 25°C)	>50,000h L90B10
Operating Ambient Temperature	-10°- 35°C

Driver	
Non-Dim	Remote
Phase Cut	Remote
DALI	Remote
Bluetooth	Remote




Available Accessories
PS10 End Cap (Allow 2mm length clearance per end cap)
PS10 Mounting Clip (Allow 2mm width clearance for mounting clips)



Luminaire



Accessories

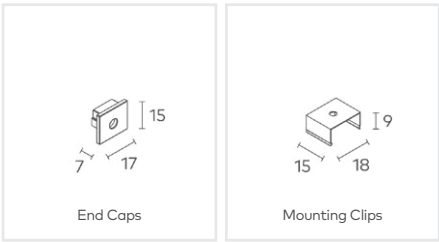


	LED Power	Lumens	Beam	SDCM	Maximum Single Length Run	Cut Increments
1 Single CCT	5W/m (24V DC)	327lm/m at 3000K	110°	≤1	20m	6.25mm
	10W/m (24V DC)	654lm/m at 3000K			10m	
	15W/m (24V DC)	981lm/m at 3000K			6.5m	
	20W/m (24V DC)	1307lm/m at 3000K			5m	
Tunable White (2700K - 6500K)	5W/m (24V DC)	301lm/m at 2700K	110°	≤1	5m	11mm
	10W/m (24V DC)	602lm/m at 2700K				
	15W/m (24V DC)	902lm/m at 2700K				
	20W/m (24V DC)	1203lm/m at 2700K				
RGB	10W/m (24V DC)	211lm/m	110°	N/A	5m	50mm
	15W/m (24V DC)	316lm/m				
	20W/m (24V DC)	422lm/m				
RGBW (W at 3000K)	15W/m (24V DC)	427lm/m at 3000K	110°	≤2 (3000K)	5m	50mm
	20W/m (24V DC)	569lm/m at 3000K				

Key Information	
Mounting	Surface, Recessed
Finish	Aluminium Textured Black Textured White
LED CCT	2700K 3000K 4000K 2700K-6500K (Tunable White) RGB RGBW
Diffuser	Opal Diffuser
Warranty	5 Years

Design	
Product Family	Inter
Material	Powdercoated Aluminum, PC Diffuser
IP Rating	IP20
Class Rating	Class III
Maximum Supply Length	3 metres
Strip Compatibility	Inter IN10 Strip Light

Performance	
Lumen Efficacy	Up to 66lm/W
CRI (Ra/R9, Single CCT)	95+ (R9: >90)
Lifetime (Ta 25°C)	>50,000h L90B10
Operating Ambient Temperature	-10°- 35°C


Driver	
Non-Dim	Remote
Phase Cut	Remote
DALI	Remote
Bluetooth	Remote

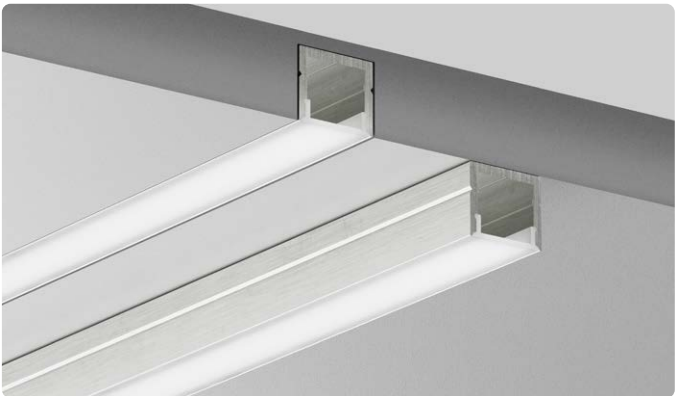


Available Accessories
PS17 End Cap (Allow 2mm length clearance per end cap)
PS17 Mounting Clip (Allow 2mm width clearance for mounting clips)



Luminaire

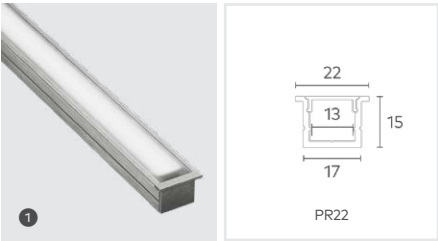

Accessories

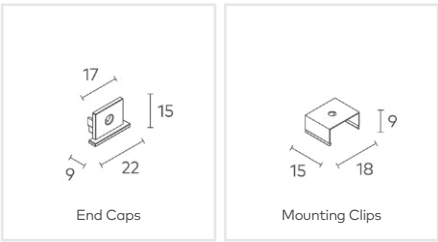

		LED Power	Lumens	Beam	SDCM	Maximum Single Length Run	Cut Increments
1	Single CCT	5W/m (24V DC)	327lm/m at 3000K	110°	≤1	20m	6.25mm
		10W/m (24V DC)	654lm/m at 3000K			10m	
		15W/m (24V DC)	981lm/m at 3000K			6.5m	
		20W/m (24V DC)	1307lm/m at 3000K			5m	
	Tunable White (2700K - 6500K)	5W/m (24V DC)	301lm/m at 2700K	110°	≤1	5m	11mm
		10W/m (24V DC)	602lm/m at 2700K				
		15W/m (24V DC)	902lm/m at 2700K				
		20W/m (24V DC)	1203lm/m at 2700K				
	RGB	10W/m (24V DC)	211lm/m	110°	N/A	5m	50mm
		15W/m (24V DC)	316lm/m				
		20W/m (24V DC)	422lm/m				
	RGBW(W at 3000K)	15W/m (24V DC)	427lm/m at 3000K	110°	≤2 (3000K)	5m	50mm
		20W/m (24V DC)	569lm/m at 3000K				

Key Information	
Mounting	Recessed
Finish	Aluminium Textured Black Textured White
LED CCT	2700K 3000K 4000K 2700K-6500K (Tunable White) RGB RGBW
Diffuser	Opal Diffuser
Warranty	5 Years

Design	
Product Family	Inter
Material	Powdercoated Aluminum, PC Diffuser
IP Rating	IP20
Class Rating	Class III
Maximum Supply Length	3 metres
Strip Compatibility	Inter IN10 Strip Light

Performance	
Lumen Efficacy	Up to 66lm/W
CRI (Ra/R9, Single CCT)	95+ (R9: >90)
Lifetime (Ta 25°C)	>50,000h L90B10
Operating Ambient Temperature	-10°- 35°C


Driver	
Non-Dim	Remote
Phase Cut	Remote
DALI	Remote
Bluetooth	Remote




Available Accessories
PR22 End Cap (Allow 2mm length clearance per end cap)
PR22 Mounting Clip (Allow 2mm width clearance for mounting clips)



Luminaire

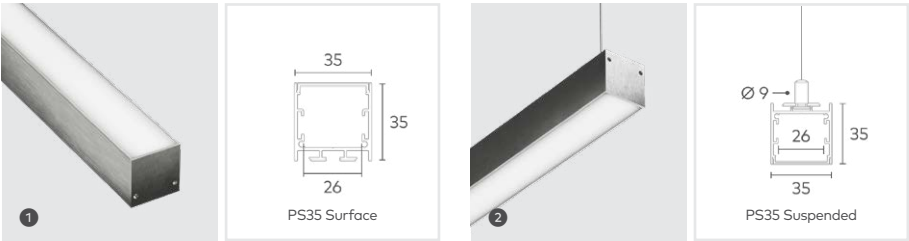

Accessories

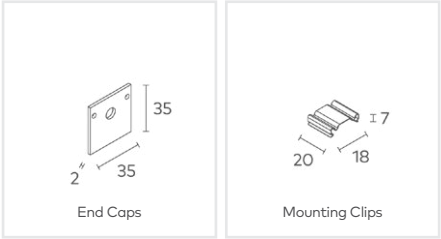

	LED Power	Lumens	SDCM	Beam	Maximum Single Length Run	Cut Increments
1 2 Single CCT	5W/m (24V DC)	249lm/m at 3000K	≤1	110°	20m	6.25mm
	10W/m (24V DC)	498lm/m at 3000K			10m	
	15W/m (24V DC)	747lm/m at 3000K			6.5m	
	20W/m (24V DC)	995lm/m at 3000K			5m	
	30W/m (24V DC)	1494lm/m at 3000K			6.5m	
1 Tunable White (2700K - 6500K)	5W/m (24V DC)	229lm/m at 2700K	≤1	110°	5m	11mm
	10W/m (24V DC)	458lm/m at 2700K				
	15W/m (24V DC)	687lm/m at 2700K				
	20W/m (24V DC)	916lm/m at 2700K				
	30W/m (24V DC)	1374lm/m at 2700K				
RGB	10W/m (24V DC)	161lm/m	N/A	110°	5m	50mm
	15W/m (24V DC)	241lm/m				
	20W/m (24V DC)	321lm/m				
	30W/m (24V DC)	482lm/m				
RGBW(W at 3000K)	15W/m (24V DC)	325lm/m at 3000K	≤2 (3000K)	110°	5m	50mm
	20W/m (24V DC)	433lm/m at 3000K				
	30W/m (24V DC)	650lm/m at 3000K				

Key Information	
Mounting	Surface, Suspended
Finish	☒ Aluminium ☒ Textured Black ☐ Textured White
LED CCT	☒ 2700K ☒ 3000K ☒ 4000K ☒ 2700K-6500K (Tunable White) ☒ RGB ☒ RGBW
Diffuser	Opal Diffuser
Warranty	5 Years

Design	
Product Family	Inter
Material	Powdercoated Aluminium, PC Diffuser
IP Rating	IP20
Class Rating	Class III
Maximum Supply Length	3 metres
Strip Compatibility	Inter IN10 Strip Light
Cable Length	3000mm

Performance	
Lumen Efficacy	Up to 51lm/W
CRI (Ra/R9, Single CCT)	95+ (R9: >90)
Lifetime (Ta 25°C)	>50,000h L90B10
Operating Ambient Temperature	-10°- 35°C

Driver	
Non-Dim	Remote
Phase Cut	Remote
DALI	Remote
Bluetooth	Remote




Available Accessories	
PS35 End Cap (Allow 2mm length clearance per end cap)	
PS35 Mounting Clip (Allow 2mm width clearance for mounting clips)	
Inter Linear 3000mm Suspension Kit	



Luminaire



Accessories




	LED Power	Lumens	Beam	SDCM	Maximum Single Length Run	Cut Increments
1 Single CCT	5W/m (24V DC)	249lm/m at 3000K	110°	≤1	20m	6.25mm
	10W/m (24V DC)	498lm/m at 3000K			10m	
	15W/m (24V DC)	747lm/m at 3000K			6.5m	
	20W/m (24V DC)	995lm/m at 3000K			5m	
	30W/m (24V DC)	1494lm/m at 3000K			6.5m	
Tunable White (2700K - 6500K)	5W/m (24V DC)	229lm/m at 2700K	110°	≤1	5m	11mm
	10W/m (24V DC)	458lm/m at 2700K				
	15W/m (24V DC)	687lm/m at 2700K				
	20W/m (24V DC)	916lm/m at 2700K				
	30W/m (24V DC)	1374lm/m at 2700K				
RGB	10W/m (24V DC)	161lm/m	110°	N/A	5m	50mm
	15W/m (24V DC)	241lm/m				
	20W/m (24V DC)	321lm/m				
	30W/m (24V DC)	482lm/m				
RGBW(W at 3000K)	15W/m (24V DC)	325lm/m at 3000K	110°	≤2 (3000K)	5m	50mm
	20W/m (24V DC)	433lm/m at 3000K				
	30W/m (24V DC)	650lm/m at 3000K				

Key Information	
Mounting	Recessed
Finish	☐ Aluminium ☐ Textured Black ☐ Textured White
LED CCT	☐ 2700K ☐ 3000K ☐ 4000K ☐ 2700K-6500K (Tunable White) ☐ RGB ☐ RGBW
Diffuser	Opal Diffuser
Warranty	5 Years

Design	
Product Family	Inter
Material	Powdercoated Aluminum, PC Diffuser
IP Rating	IP20
Class Rating	Class III
Maximum Supply Length	3 metres
Strip Compatibility	Inter IN10 Strip Light

Performance	
Lumen Efficacy	Up to 51lm/W
CRI (Ra/R9, Single CCT)	95+ (R9: >90)
Lifetime (Ta 25°C)	>50,000h L90B10
Operating Ambient Temperature	-10°- 35°C

Driver	
Non-Dim	Remote
Phase Cut	Remote
DALI	Remote
Bluetooth	Remote

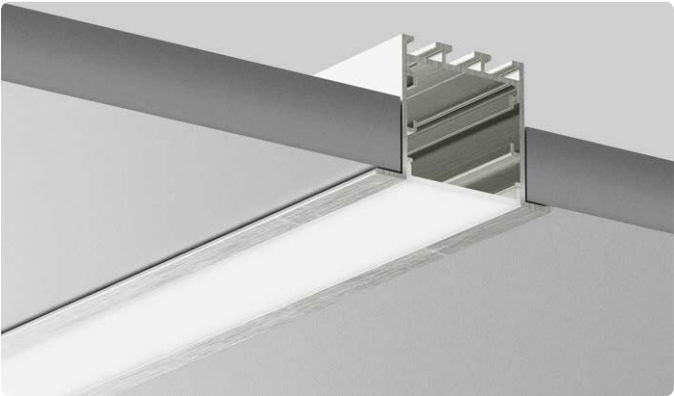

Available Accessories
PR50 End Cap (Allow 2mm length clearance per end cap)
PR50 Mounting Clip (Allow 2mm width clearance for mounting clips)

