


Luminaire



Accessories

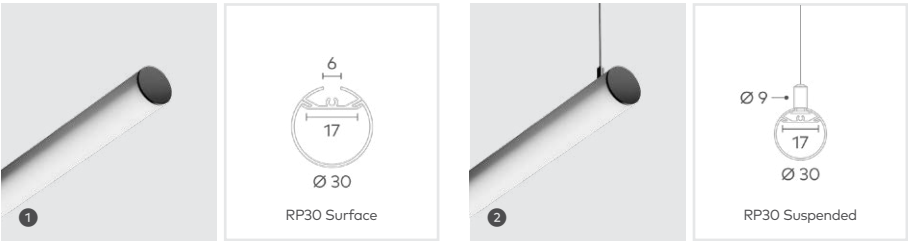

	LED Power	Lumens (3000K)	Beam	SDCM	Maximum Single Length Run	Cut Increments
1 2 Single CCT	5W/m (24V DC)	520lm/m at 3000K	170°	≤1	20m	6.25mm
	10W/m (24V DC)	1039lm/m at 3000K			10m	
	15W/m (24V DC)	1559lm/m at 3000K			6.5m	
	20W/m (24V DC)	2078lm/m at 3000K			5m	
1 Tunable White (2700K - 6500K)	5W/m (24V DC)	478lm/m at 2700K	170°	≤1	5m	11mm
	10W/m (24V DC)	956lm/m at 2700K				
	15W/m (24V DC)	1434lm/m at 2700K				
	20W/m (24V DC)	1912lm/m at 2700K				
RGB	10W/m (24V DC)	335lm/m	170°	N/A	5m	50mm
	15W/m (24V DC)	503lm/m				
	20W/m (24V DC)	671lm/m				
RGBW(W at 3000K)	15W/m (24V DC)	678lm/m at 3000K	170°	≤2 (3000K)	5m	50mm
	20W/m (24V DC)	905lm/m at 3000K				

Key Information	
Mounting	Surface, Suspended
Finish	■ Textured Black
LED CCT	■ 2700K
	■ 3000K
	■ 4000K
	■ 2700K-6500K (Tunable White)
	■ RGB
	■ RGBW
Diffuser	Opal Diffuser
Warranty	5 Years

Design	
Product Family	Inter
Material	Anodised Aluminum, PC Diffuser
IP Rating	IP20
Class Rating	Class III
Maximum Supply Length	3 metres
Strip Compatibility	Inter IN10 Strip Light
Cable Length	3000mm

Performance	
Lumen Efficacy	Up to 106lm/W
CRI (Ra/R9, Single CCT)	95+ (R9: >90)
Lifetime (Ta 25°C)	>50,000h L90B10
Operating Ambient Temperature	-10°- 35°C

Driver	
Non-Dim	Remote
Phase Cut	Remote
DALI	Remote
Bluetooth	Remote



Available Accessories
RP30 End Cap
RP30 Mounting Clip
Inter Linear 3000mm Suspension Kit

