


Luminaire

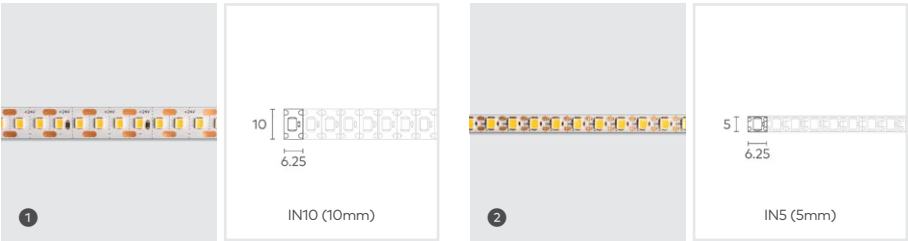


	LED Power	Lumens (at 3000K)	Beam	No. of LED's	LED Pitch	Maximum Single Length Run	Cut Increments
1 Inter IN10 Strip Light	5W/m (24V DC)	615lm/m	120°	160LEDs/m	6.25mm	20m	6.25mm
	10W/m (24V DC)	1233lm/m				10m	
	15W/m (24V DC)	1850lm/m				6.5m	
	20W/m (24V DC)	2467lm/m				5m	
2 Inter IN5 Strip Light	10W/m (24V DC)	1233lm/m	120°	160LEDs/m	6.25mm	5m	6.25mm

Key Information	
Mounting	3M Adhesive tape
LED CCT	2700K 3000K 4000K
Warranty	5 Years
Maximum Supply Length	20 metres
Maximum Run Power	100W

Design	
Product Family	Inter
Material	3oz Flexible copper-clad PCB
IP Rating	IP20
Class Rating	Class III

Performance	
Lumen Efficacy	Up to 125lm/W
CRI (Ra/R9)	95+ (R9: >90)
Rf (TM-30)	94
Rg (TM-30)	101
Lifetime (Ta 25°C)	>50,000h L90B10
Operating Ambient Temperature	-10°- 35°C
SDCM	≤1


Driver	
Non-Dim	Remote
Phase Cut	Remote
DALI	Remote
Bluetooth	Remote

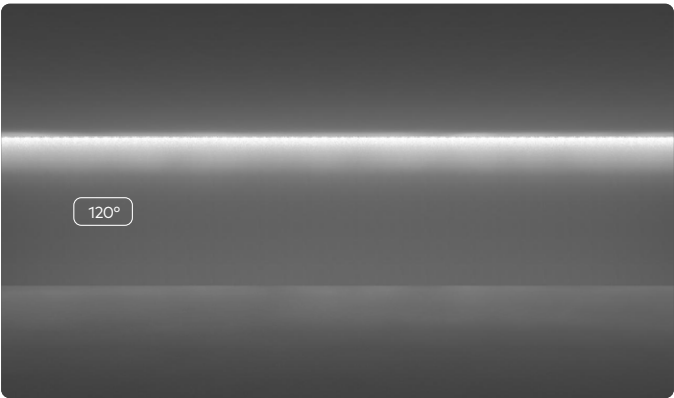

Available Accessories
LED Strip Roller (for profile installation)




Luminaire

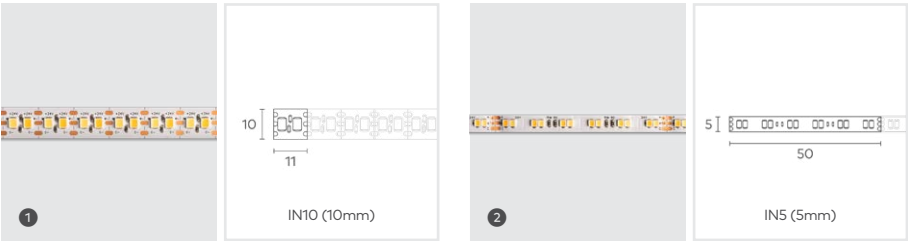

	LED Power	Lumens (at 2700K)	Beam	SDCM	No. of LED's	LED Pitch	Maximum Single Length Run	Cut Increments
1 Inter IN10 Tunable White Strip Light	5W/m (24V DC)	568lm/m	120°	≤1	180LEDs/m	11mm	5m	50mm
	10W/m (24V DC)	1135lm/m						
	15W/m (24V DC)	1703lm/m						
	20W/m (24V DC)	2270lm/m						
2 Inter IN5 Tunable White Strip Light	10W/m (24V DC)	852lm/m	120°	≤2	240LEDs/m	8.3mm	5m	11mm

Key Information		Design		Performance		Driver	
Mounting	3M Adhesive tape	Product Family	Inter	Lumen Efficacy	Up to 125lm/W	DALI	Remote
LED CCT	2700K-6500K (Tunable White)	Material	3oz Flexible copper-clad PCB	CRI (Ra/R9)	95+ (R9: >90)	Bluetooth	Remote
Warranty	5 Years	IP Rating	IP20	Rf (TM-30)	94		
Maximum Supply Length	20 metres	Class Rating	Class III	Rg (TM-30)	101		
Maximum Run Power	100W			Lifetime (Ta 25°C)	>50,000h L90B10		
				Operating Ambient Temperature	-10°- 35°C		

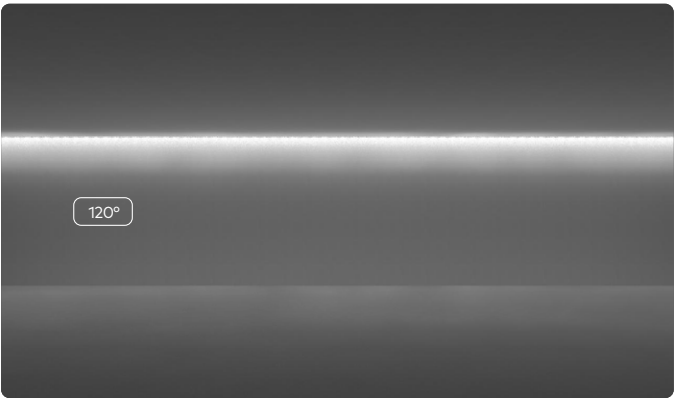


Available Accessories

LED Strip Roller (for profile installation)




Luminaire

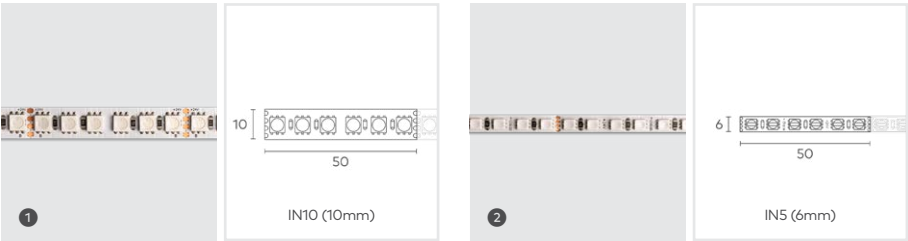

	LED Power	Lumens (RGB)	Beam	Maximum Single Length Run
1 Inter IN10 RGB Strip Light	10W/m (24V DC)	398lm/m	120°	5m
	15W/m (24V DC)	597lm/m		
	20W/m (24V DC)	796lm/m		
2 Inter IN5 RGB Strip Light	10W/m (24V DC)	543lm/m	120°	5m


Key Information		Design		Performance		Driver	
Mounting	3M Adhesive tape	Product Family	Inter	Lumen Efficacy	Up to 54lm/W	DALI	Remote
LED Colour	RGB	Material	3oz Flexible copper-clad PCB	CRI (Ra/R9)	N/A	Bluetooth	Remote
Warranty	5 Years	IP Rating	IP20	Rf (TM-30)	N/A		
Maximum Supply Length	20 metres	Class Rating	Class III	Rg (TM-30)	N/A		
Maximum Run Power	100W	Cut Lengths	50mm	Lifetime (Ta 25°C)	>50,000h L90B10		
		LED Pitch	8.3mm	Operating Ambient Temperature	-10°- 35°C		
		No. of LED's	120LEDs/m	SDCM	N/A		

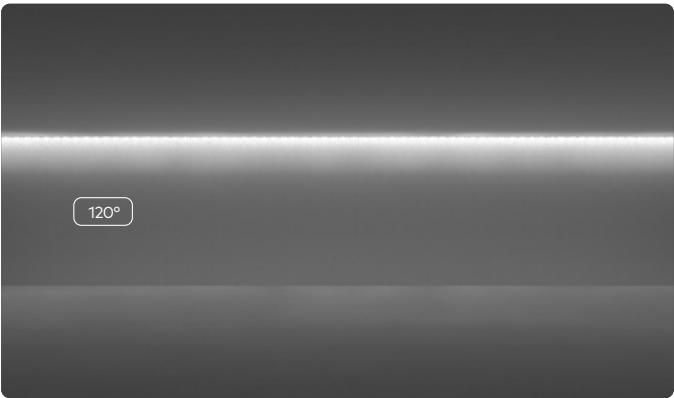

Available Accessories
LED Strip Roller (for profile installation)




Luminaire

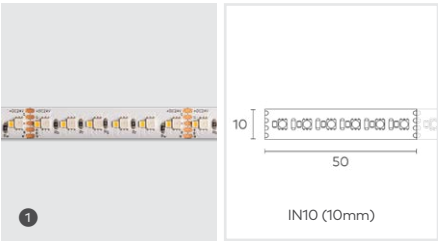

	LED Power	Lumens (3000K)	Lumens (RGB)	Beam	Maximum Single Length Run
1 Inter IN10 RGBW Strip Light	15W/m (24V DC)	805lm/m	359lm/m	120°	5m
	20W/m (24V DC)	1074lm/m	479lm/m		

Key Information		Design		Performance		Driver	
Mounting	3M Adhesive tape	Product Family	Inter	Lumen Efficacy	Up to 107lm/W	DALI	Remote
LED CCT	RGBW (3000K)	Material	3oz Flexible copper-clad PCB	CRI (Ra/R9)	95+ (R9: >90)	Bluetooth	Remote
Warranty	5 Years	IP Rating	IP20	Rf (TM-30)	91		
Maximum Supply Length	20 metres	Class Rating	Class III	Rg (TM-30)	98		
Maximum Run Power	100W	Cut Lengths	50mm	Lifetime (Ta 25°C)	>50,000h L90B10		
		LED Pitch	8.3mm	Operating Ambient Temperature	-10°- 35°C		
		No. of LED's	240LEDs/m	SDCM	≤2 (3000K)		

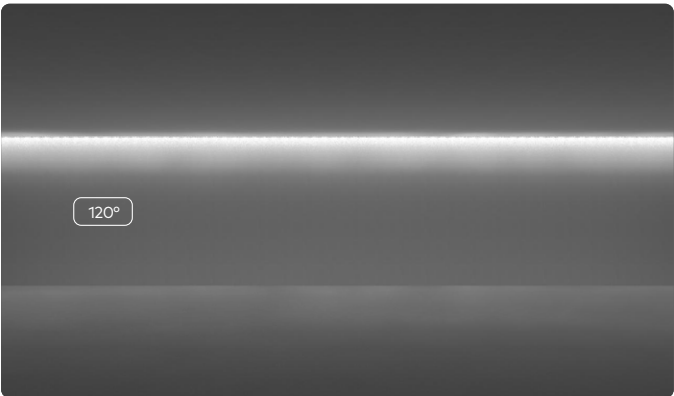

Available Accessories
LED Strip Roller (for profile installation)

