


		LED Power	Lumens (at 3000K)	Beam	Weight
1	Mini	8W (200mA)	669lm	15° 36° 50°	380g
2	Small	15W (400mA)	1149lm	15° 36° 50°	460g
3	Medium	15W (400mA)	1285lm	15° 36° 50°	840g
		25W (700mA)	2248lm	15° 36° 50°	840g

Key Information		Design		Performance		Driver	
Mounting	Ceiling Recessed	Product Family	Kobe G2	Lumen Efficacy	Up to 97lm/W	Phase Cut	Remote
Finish	☒ Textured Black ☐ Textured White/Black	Adjustability	350° Rotation 90° Tilt	CRI (Ra/R9)	92+ (R9: >50)	DALI	Remote
LED CCT	☒ 2700K ☐ 3000K ☐ 4000K ☐ 2700K-6500K (Tunable White)	Material	Powder Coated Aluminium	UGR (70/50/20)	<13	Bluetooth	Remote
Warranty	5 Years	IP Rating	IP20	Lifetime (Ta 25°C)	>50,000h L90B10		
		Class Rating	Class II	Operating Ambient Temperature	-10°- 35°C		
		Insulation Rating	IC-4	SDCM	≤2, ≤3 Tunable White		
				COI Compliance Model Requirements	4000K		



Available Accessories
Honeycomb Lens (for reduced glare)
Linear Lens (for elliptical beams)
Softening Lens (for softening beam edges)

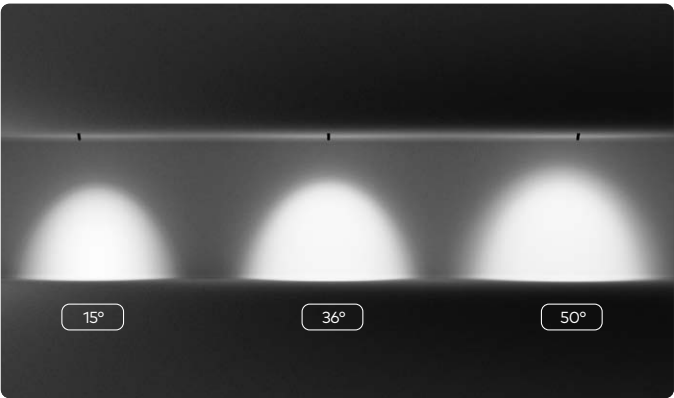