


		LED Power	Lumens (at 3000K)	Beam	Weight
1	Mini	8W (200mA)	669lm	15° 36° 50°	340g
2	Small	15W (400mA)	1149lm	15° 36° 50°	520g
3	Medium	15W (400mA)	1285lm	15° 36° 50°	840g
		25W (700mA)	2248lm	15° 36° 50°	840g

Key Information		Design		Performance		Driver	
Mounting	Ceiling Surface	Product Family	Kobe G2	Lumen Efficacy	Up to 97lm/W	Phase Cut	Remote (Mini), Built-in (Small, Medium)
Finish	Textured Black Textured White/Black	Adjustability	350° Rotation 90° Tilt	CRI (Ra/R9)	92+ (R9: >50)	DALI	Built-in
LED CCT	2700K 3000K 4000K 2700K-6500K (Tunable White)	Material	Powder Coated Aluminium	UGR (70/50/20)	<10	Bluetooth	Remote
Lifetime (Ta 25°C)		IP Rating	IP20	Lifetime (Ta 25°C)	>50,000h L90B10		
Operating Ambient Temperature		Class Rating	Class I	Operating Ambient Temperature	-10°- 35°C		
SDCM				SDCM	≤2, ≤3 Tunable White		
COI Compliance Model Requirements				COI Compliance Model Requirements	4000K		



Available Accessories	
Honeycomb Lens	(for reduced glare)
Linear Lens	(for elliptical beams)
Softening Lens	(for softening beam edges)

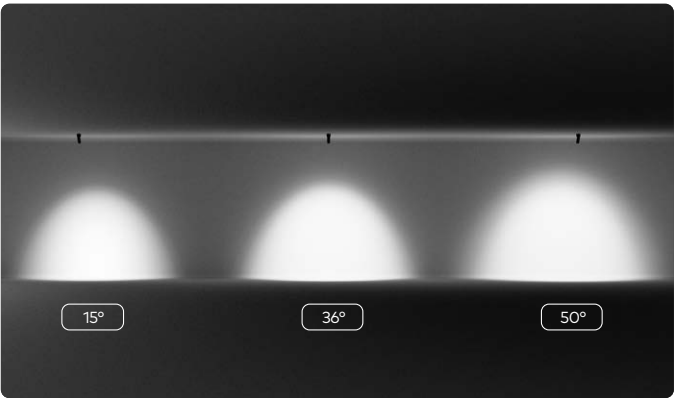